



PMA PMAFIX PRO CONNECTOR / PMAFLEX MULTILAYER CONDUITS

TECHNICAL DETAILS

- 1 Highest impact resistance through fully closed design.**
 - The perfectly symmetrical and fully enclosed fitting design prevents potentially increased impact stresses at edges and corners.
- 2 All IP classes up to and including IP68 and IP69K - in static and dynamic applications.**
 - Extra long ribbed sealing areas (cross linked material).
 - 360° locking and sealing element shields against high pressure water jets (up to 100 bar).
- 3 Highest pull out strength.**
 - Highest pull out strength achieved through 360° grip on the conduit profile.



5 New technology multilayer conduit



IP68/IP69K


- 4 Intelligent safety locking mechanism.**
 - Highest assembly reliability - the fitting only locks when the sealing element is fully inserted.
 - Highest operational safety assured through visual and acoustic correct assembly controls.
- 5 New technology multilayer conduit**
 - Multilayer co-extrusion technology conduits are characterized by excellent mechanical strength and impact resistance.
 - Polyolefin inner layer has a very low coefficient of resistance allowing cables to be easily drawn in.



RANGER ENTERPRISE COMPANY LIMITED 菱泰企業有限公司

Units A-B, 8/F, Block 1, Tai Ping Industrial Centre, 57 Ting Kok Road, Tai Po, New Territories, Hong Kong
香港新界大埔汀角路57號太平工業中心第一座8樓A-B室

Tel 電話: (852) 2420-8928 Fax 傳真: (852) 2494-9228 E-mail 電郵: sales@ranger.com.hk Website 網址: www.ranger.com.hk



RANGER NEWS

菱泰快訊

1st Issue 2012 2012年第一期

THIS ISSUE COVERS
本期報導

P.1

A 4-IN-1 ELECTRICAL,
BUILDING & SECURITY
TRADESHOW
WELCOME TO VISIT OUR BOOTH:
1C-608

P.2

ETA
ELECTRICAL
ENCLOSURES
"ENUX" SUSTAINABLE STRONG
AND PERFORMING CABINET

P.3

EC
ELECTRICAL
INSTALLATION
SYSTEMS
LSOH RIGID CONDUIT AND
ACCESSORIES

P.4

PMA
PMAFIX PRO CONNECTOR /
PMAFLEX MULTILAYER
CONDUITS




**A 4-IN-1 ELECTRICAL, BUILDING
AND SECURITY TRADESHOW**
WELCOME TO VISIT OUR BOOTH **1C-608**

MARKETING PROMOTION

The Build4Asia tradeshow series comprising the regionally-renowned Asian Elenex, Asian Building Technologies, Asian Building Interiors and Asian Securitex will be returning on 4-6 June 2012 at the Hong Kong Convention & Exhibition Centre.

During the show period, we will be displaying and presenting the innovation and new products. Please come and visit us at booth **1C-608**.

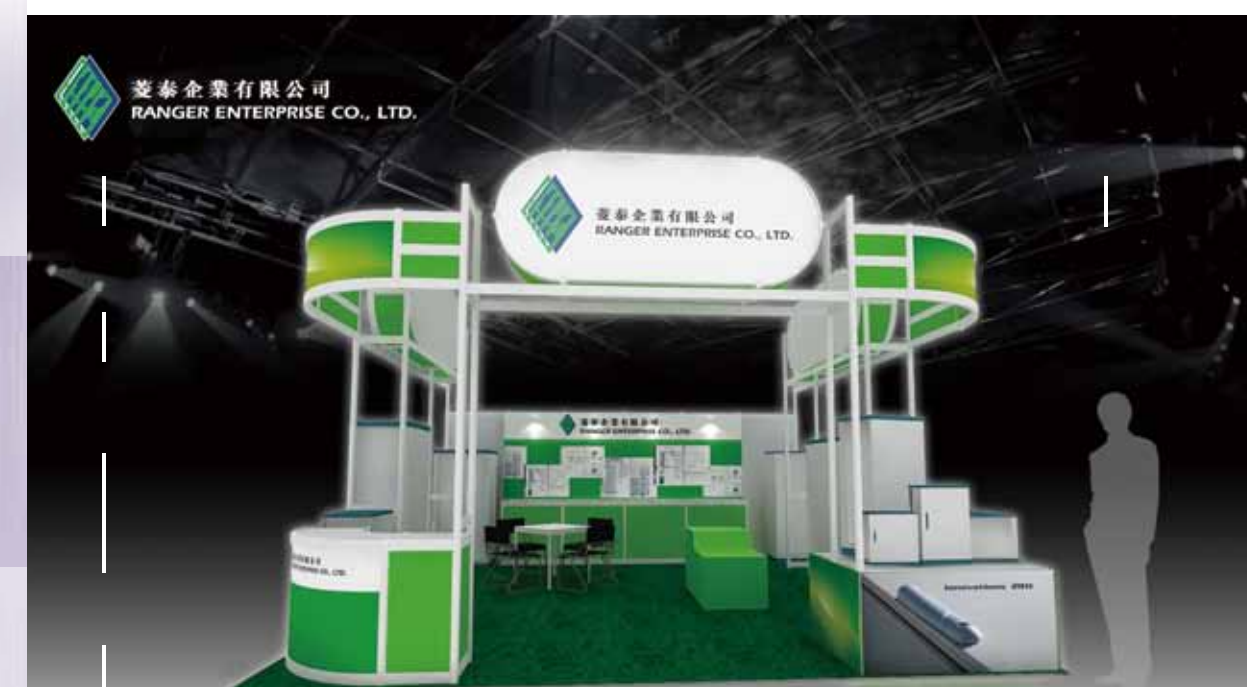



ETA ELECTRICAL ENCLOSURES

"ENUX" Sustainable Strong and Performing Cabinet




TECHNICAL FEATURE

- High-Strength Sheet Steel to **EN10268**.
- IP55.
- Complying with **IEC62208**.
- Improved mechanical features.
- A complete, complementary design, like a "Shell".
- Box-type structure of press-bent welded profiles, by the latest Continuously Laser Welding Technology.


■ Car Shown in **BLUE**
High-Strength Sheet Steel
EN10268



Enclosure frame & cable entry bottom show in **BLUE**:
High-Strength Sheet Steel.

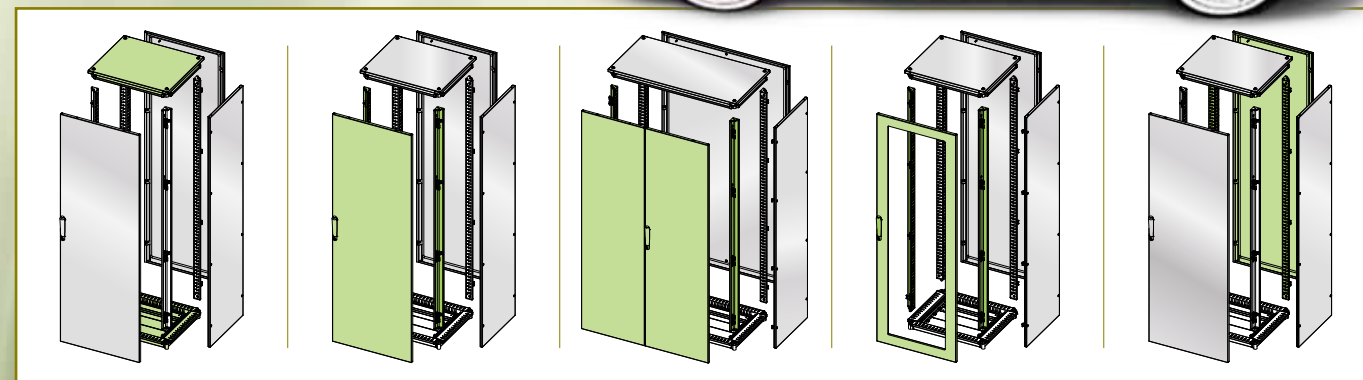

CONFORMITY AND APPROVAL:



EC ELECTRICAL INSTALLATION SYSTEMS

LSOH Rigid Conduit and Accessories

MAIN TECHNICAL FEATURES

- **Material:**
shock resistant halogen free technopolymer.
- Self-extinguishing V0 degree according to UL94 standard.
- Resistance to abnormal heat (Glow Wire Test): 960°C.
- **Installation Temperature:**
min.-25°C, max +90°C (for conduit),
min.-5°C, max +60°C (for accessories).
- Insulating strength > 100 MΩ.
- **Standard Colours:**
light grey RAL7035.
- **Reference Standards:**
EN 61386-1, EN 61386-21-22-23.
- Products complying with the main requirements of the regulation B.T. 2006/96/CE.
- Products complying with the regulation RoHS 2002/95/CE.

PATENTED DESIGN:
Gasket is co-moulded with joint body NO risk to fall off or damaged during installation.



IP67

