


# TECHNICAL DATA SHEET

## MAIN CHARACTERISTICS

### SLOTTED TRUNKINGS SH SERIES

#### CONSTRUCTIVE TECHNICAL CHARACTERISTICS

Material: made of halogen free technopolymer on NORYL base with high resistance to UV rays.  
Halogen free technopolymer in compliance with VDE 472 parte 815 standard. (BR+CL <0,2% e F<0,1%).  
Emission limit level according to CEI 20-37 part 7: 8,2 toxicity index..  
Self-extinguishing V0 degree to UL94  
Standard colour: grey RAL 7035.  
Shock resistance: IK07 (up to 2 j).  
Application temperature: minimum  $-40^{\circ}$ , maximum  $+100^{\circ}$ .  
Resistance to abnormal heat: up to  $850^{\circ}\text{C}$  (Glow Wire Test, IEC 695-2-1 standard).  
Standard length: 2 mt bars.  
Made in compliance with EN 50085-1, EN 50085-2-3, standards.  
Products in compliance with RoHS - 2002/95/CE directive.  
Products meeting the essential requirements of L.D.V. 2006/95 CE  
Made in Italy.

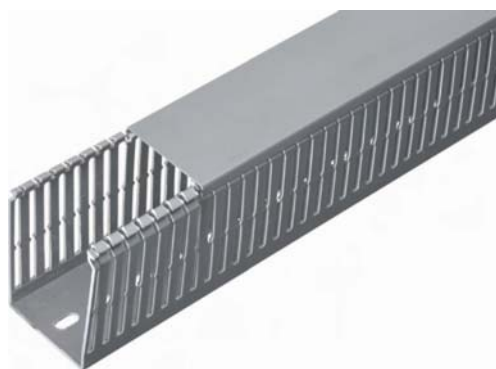

ELETTROCANALI S.p.a.  
Quality Manager

Valsecchi Luca