

CABLE REELS



MAIN TECHNICAL FEATURES

Material: made of shock resistant thermoresistant technopolymer, high resistant to UV rays.

Standard colour: grey RAL 7035, black.

Shock resistance: IK08 (up to 6 j).

Resistance to abnormal heat: up to 750°-850°C (Glow Wire Test, Reference Standard IEC 695-2-1).

Application temperature domestic type: minimum -5°, maximum +40°.

Application temperature industrial type: minimum -25°, maximum +40°, maximum operating temperature: +60°C.

Rated voltage 230/400V~ - 50Hz - Insulation voltage 500/690V~.

Rated current 10/16/32A, with thermal circuit breaker >55°C restorable.

Maximum power with rolled/extended cable on each model.

Equipped with handle for rewinding.

Reference standards: IEC EN 61242, IEC EN 61316, IEC 60884-1, IEC 60884-2, CEI 23-50 - I Ed. 1998 + V1:2002.

Products complying with the main requirements of the regulation B.T. 2006/96/CE.

Products complying with the regulation RoHS 2002/95/CE.



Domestic cable reel Series K22
page 200



Domestic cable reel with metallic support Series K22
page 201



Domestic cable reel and garden extensions Series K22
page 201



Industrial cable reel 2 EN 60309 sockets with fixed metallic support Series 699
page 202



Industrial cable reel 4 EN 60309 sockets with fixed metallic support Series 699
page 204



Industrial cable reel 4 EN 60309 sockets with mobile metallic support Series 699
page 206



Industrial extensions with EN 60309 plug and socket Series 699
page 209

TECHNICAL SPECIFICATION

Available power with rolled or extended cable (indicated on each model)

Double insulated H07RN-F cable with blocking clamp

Shock resistance IK08: suitable for heavy duties

Handle for rewinding



Domestic cable reels equipped with alveolar sockets protected against accidental contacts

Strong and functional single-piece drum

On all domestic and industrial models there is the thermal circuit breaker, which interrupts power supply in case of excessive load

High-quality cable resistant to wear

The domestic cable reel ECK22, made up of UV-resistant self-extinguishing technopolymer, are equipped with cable H05VV F3-G1-1,5 in accordance with CEI 23-50-I Ed. 1998 + V1 2002 with plugs firmly fixed to the cable through nickel-plated and protected plugs. They are characterized by alveolar sockets protected against accidental contacts, base and handle for rewinding. The industrial cable reels are built with a double insulated H07RN-F cable, IP44/IP67 EN60309 plugs. The painted and galvanized steel

metal support has got a soft antislip rubber handle, automatic internal drum brake and cable clamp.

All reels are wired with resettable thermal circuit breaker that, acting under the Joule effect in close contact with the cable, interrupts the power supply if the cable temperature exceeds 55° C. The circuit breaker is not a cut-off switch, so it doesn't protect against short circuits and overloads and all operations are to be performed after having dissected the upstream circuit with appropriate control

equipments.

When in use carefully unroll the cable entirely, check the absence of any damages or cracks, and periodically control the continuity of the phase and protection conductors.

Prevent the cable from being crushed by abnormal loads such as vehicles, trailers and similar and rewind the cable after the use, which must always be temporary. Do not use the cable reels in environments with a risk of fire or explosion.

mounting examples



DOMESTIC CABLE REELS SERIES K22

MAIN TECHNICAL FEATURES:

- Cable reel with plug firmly fixed to the cable type S17 16A.
- Rated voltage 250V~ - 50Hz - insulation voltage 500V~.
- Sockets with protected poles against accidental contact.
- Thermal circuit breaker >55°C restorable.
- For supply of equipment in Class I or II.
- Equipped with handle for rewinding.
- Products complying with the Standards IEC 60884-1, IEC 60884-2-5, EN 61242.



IP20

Domestic cable reels - plug 16A 2P+⊕ S17 - Italian and multistandard sockets

ITEM	SOCKETS			PLUG 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	10/16A 2P+⊕	10/16A 2P+⊕	16A 2P+⊕					
ECK22101	2			S17 - 2P+⊕	20	5 - 3x1	1,2 - 2,2 kW	1/10
ECK22102	2	1		S17 - 2P+⊕	20	10 - 3x1	1,2 - 2,2 kW	1/10
ECK22103		4		S17 - 2P+⊕	20	20 - 3x1	1,2 - 2,2 kW	1/6

Domestic cable reels - plug 16A 2P+⊕ S17 - multistandard sockets - Ø 185 mm

ITEM	SOCKETS			PLUG 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	10/16A 2P+⊕	10/16A 2P+⊕	16A 2P+⊕					
ECK22104		4		S17 - 2P+⊕	20	15 - 3x1,5	1,2 - 2,2 kW	1

Domestic cable reels - plug 16A 2P+⊕ S17 - multistandard sockets - Ø 240 mm

ITEM	SOCKETS			PLUG 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	10/16A 2P+⊕	10/16A 2P+⊕	16A 2P+⊕					
ECK22105		4		S17 - 2P+⊕	20	25 - 3x1,5	1,2 - 2,2 kW	1

Domestic cable reels - plug 16A 2P+⊕ S17 - Italian and schuko sockets - Ø 235 mm

ITEM	SOCKETS			PLUG 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	10/16A 2P+⊕	10/16A 2P+⊕	16A 2P+⊕					
ECK22110	2		2	S17 - 2P+⊕	20	15 - 3x1,5	1,2 - 3,1 kW	1
ECK22111	2		2	S17 - 2P+⊕	20	20 - 3x1,5	1,2 - 3,1 kW	1
ECK22112	2		2	S17 - 2P+⊕	20	25 - 3x1,5	1,2 - 3,1 kW	1




ECK22103



ECK22104



ECK22105



ECK22110

■ DOMESTIC CABLE REELS AND GARDEN EXTENSIONS **SERIES K22**

MAIN TECHNICAL FEATURES:

- Cable reels with plug firmly fixed to the cable type S31/S17 16A.
- Rated voltage 250V~ - 50Hz - insulation voltage 500V~.
- Sockets with protected poles against accidental contact.
- Thermal circuit breaker >55°C restorable.
- For supply of equipment in Class I or II.
- Equipped with handle for rewinding.
- Products complying with the Standards IEC 60884-1, IEC 60884-2-5, EN 61242.



IP20

■ Domestic cable reels - plug 16A 2P+⊕ - S17 - Italian and schuko sockets - Ø 300 mm

ITEM	SOCKETS			PLUG 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	10/16A 2P+⊕	10/16A 2P+⊕	16A 2P+⊕					
ECK22115	2		2	S17 - 2P+⊕	20	20 - 3x1,5	1,0 - 3,0 kW	1
ECK22116	2		2	S17 - 2P+⊕	20	30 - 3x1,5	1,0 - 3,0 kW	1
ECK22117	2		2	S17 - 2P+⊕	20	40 - 3x1,5	1,0 - 3,0 kW	1
ECK22118	2		2	S17 - 2P+⊕	20	50 - 3x1,5	1,0 - 3,0 kW	1

■ Garden cable reels - plug 16A 2P+⊕ S31 schuko- schuko socket 16A 2P+⊕ P30 Ø 300 mm

ITEM	SOCKETS			PLUG 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	10/16A 2P+⊕	10/16A 2P+⊕	16A 2P+⊕					
ECK22310			1	S31 - 2P+⊕	20	20 - 3x1,5	1,0 - 3,0 kW	1
ECK22311			1	S31 - 2P+⊕	20	30 - 3x1,5	1,0 - 3,0 kW	1
ECK22312			1	S31 - 2P+⊕	20	40 - 3x1,5	1,0 - 3,0 kW	1
ECK22313			1	S31 - 2P+⊕	20	50 - 3x1,5	1,0 - 3,0 kW	1

■ Garden extensions - plug 16A 2P+⊕ S17 - schuko socket 16A 2P+⊕ P30

ITEM	SOCKETS			PLUG 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	10/16A 2P+⊕	10/16A 2P+⊕	16A 2P+⊕					
ECK22410			1	S17- 2P+⊕	20	10 - 3x1,5	1,0 - 3,0 kW	1
ECK22411			1	S17- 2P+⊕	20	15 - 3x1,5	1,0 - 3,0 kW	1
ECK22412			1	S17- 2P+⊕	20	20 - 3x1,5	1,0 - 3,0 kW	1
ECK22413			1	S17- 2P+⊕	20	25 - 3x1,5	1,0 - 3,0 kW	1
ECK22414			1	S17- 2P+⊕	20	30 - 3x1,5	1,0 - 3,0 kW	1
ECK22415			1	S17- 2P+⊕	20	35 - 3x1,5	1,0 - 3,0 kW	1
ECK22416			1	S17- 2P+⊕	20	40 - 3x1,5	1,0 - 3,0 kW	1
ECK22417			1	S17- 2P+⊕	20	50 - 3x1,5	1,0 - 3,0 kW	1



ECK22115



ECK22310



ECK22410

INDUSTRIAL CABLE REELS SERIES 699

MAIN TECHNICAL FEATURES:

- Cable reel with galvanized and painted galvanized metallic support.
- Rated voltage 230/400V~ - 50Hz - insulation voltage 500/690V~.
- Drum with internal automatic brake system and cable blocking clamp.
- Thermal circuit breaker >55°C restorable.
- Cable H07NRF - double insulation HAR or H05VV-F.
- Equipped with handle for rewinding.
- Products complying with the Standards EN 61242, EN 61316.



IP44

GREY RAL 7035

Empty cable reels with support

ITEM	DESCRIPTION	SOCKETS	DRUM DIAMETER	PACKAGING PIECES
EC69901	Empty cable reel	2 sockets	330 mm - 255x335x400	1
EC69903	Empty cable reel	4 sockets	400 mm - 255x430x520	1

Industrial cable reels - 2 sockets - cable H07RN-F - Ø 330 mm - 255x235x400 mm


ITEM	SOCKETS			PLUG EN 60309 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE H07RN-F	PACKAGING PIECES
	 10/16A 2P+⊕	 16A 2P+⊕						
EC6992020	2		Italian/Schuko	2P+⊕	44	30 - 3x2,5	1,8 - 3,6 kW	1
EC6992020L	2		Italian/Schuko	2P+⊕	44	40 - 3x2,5	1,5 - 3,6 kW	1
EC6992025		2	French	2P+⊕	44	30 - 3x2,5	1,8 - 3,6 kW	1
EC6992025L		2	French	2P+⊕	44	40 - 3x2,5	1,5 - 3,6 kW	1

Industrial cable reels - 2 sockets - cable H05VV-F - Ø 330 mm - 255x235x400 mm

ITEM	SOCKETS				PLUG EN 60309 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE H05VV-F	PACKAGING PIECES
EC6992021	2	-	-	-	2P+⊕	44	30 - 3x1,5	1,5 - 3,6 kW	1
EC6992021L	2	-	-	-	2P+⊕	44	40 - 3x1,5	1,5 - 3,6 kW	1
EC6992021XL	2	-	-	-	2P+⊕	44	50 - 3x1,5	1,5 - 3,6 kW	1
EC6992022	1	-	-	1	2P+⊕	44	30 - 3x1,5	1,5 - 3,6 kW	1
EC6992022L	1	-	-	1	2P+⊕	44	40 - 3x1,5	1,5 - 3,6 kW	1
EC6992022XL	1	-	-	1	2P+⊕	44	50 - 3x1,5	1,5 - 3,6 kW	1



EC69901



EC69903



EC6992020



EC6992021

INDUSTRIAL CABLE REELS SERIES 699

MAIN TECHNICAL FEATURES:

- Cable reel with galvanized and painted galvanized metallic support, equipped with handle for rewinding.
- Rated voltage 230/400V~ - 50Hz - insulation voltage 500/690V~.
- Drum with internal automatic brake system and cable blocking clamp.
- Thermal circuit breaker >55°C restorable.
- Cable H07NRF - double insulation HAR.
- Products complying with the Standards EN 61242, EN 61316.
- Single package in strong cardboard boxes suitable for transport and storage.
- Dimensions 255x335x400 mm.
- **Different combinations supplied on request.**

IP44
IP55



GREY RAL 7035

Industrial cable reels - 2 sockets EN 60309 16A - Ø 330 mm

ITEM	SOCKETS				PLUG EN 60309 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	EN 309 2P+⊕	EN 309 3P+⊕	EN 309 3P+N+⊕	SCHUKO ITALIAN					
EC6992120	1	1	-	-	3P+N+⊕	44	20 - 5x2,5	5,0 - 11,0 kW	1
EC6992121	2	-	-	-	2P+⊕	44	30 - 3x2,5	1,8 - 3,6 kW	1
EC6992121L	2	-	-	-	2P+⊕	44	40 - 3x2,5	1,5 - 3,6 kW	1
EC6992122	1	-	-	1	2P+⊕	44	30 - 3x2,5	1,8 - 3,6 kW	1
EC6992122L	1	-	-	1	2P+⊕	44	40 - 3x2,5	1,5 - 3,6 kW	1
EC6992124	-	2	-	-	3P+⊕	44	30 - 4x2,5	4,5 - 11,0 kW	1
EC6992124L	-	2	-	-	3P+⊕	44	40 - 4x2,5	4,0 - 11,0 kW	1
EC6992125	-	-	2	-	3P+N+⊕	44	20 - 5x2,5	5,0 - 11,0 kW	1
EC6992126	1	-	1	-	3P+N+⊕	44	20 - 5x2,5	5,0 - 11,0 kW	1
EC6992130	1	1	-	-	3P+N+⊕	55	20 - 5x2,5	5,0 - 11,0 kW	1
EC6992131	2	-	-	-	2P+⊕	55	30 - 3x2,5	1,8 - 3,6 kW	1
EC6992131L	2	-	-	-	2P+⊕	55	40 - 3x2,5	1,5 - 3,6 kW	1
EC6992134	-	2	-	-	3P+⊕	55	30 - 4x2,5	4,5 - 11,0 kW	1
EC6992134L	-	2	-	-	3P+⊕	55	40 - 4x2,5	4,0 - 11,0 kW	1
EC6992135	-	-	2	-	3P+N+⊕	55	20 - 5x2,5	5,0 - 11,0 kW	1
EC6992136	1	-	1	-	3P+N+⊕	55	20 - 5x2,5	5,0 - 11,0 kW	1



EC6992120



EC6992135

INDUSTRIAL CABLE REELS SERIES 699

MAIN TECHNICAL FEATURES:

- Cable reel with galvanized and painted galvanized metallic support, equipped with handle for rewinding.
- Rated voltage 230/400V~ - 50Hz - insulation voltage 500/690V~.
- Drum with internal automatic brake system and cable blocking clamp.
- Thermal circuit breaker >55°C restorable.
- Cable H07NRF - double insulation HAR.
- Products complying with the Standards EN 61242, EN 61316.
- Single package in strong cardboard boxes suitable for transport and storage.
- Dimensions 255x430x520 mm.
- **Different combinations supplied on request.**


IP44
IP55



GREY RAL 7035

Industrial cable reels - 4 sockets EN 60309 16A - Ø 400 mm - 30 MT cable

ITEM	SOCKETS			PLUG EN 60309 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	EN 309 2P+⊕	EN 309 3P+⊕	EN 309 3P+N+⊕					
EC6992320	2	2	-	3P+N+⊕	44	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992324	4	-	-	2P+⊕	44	30 - 3x2,5	1,8 - 3,6 kW	1
EC6992325	-	4	-	3P+⊕	44	30 - 4x2,5	4,5 - 11,0 kW	1
EC6992326	-	-	4	3P+N+⊕	44	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992327	2	-	2	3P+N+⊕	44	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992328	3	1	-	3P+N+⊕	44	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992329	3	-	1	3P+N+⊕	44	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992330	2	2	-	3P+N+⊕	55	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992334	4	-	-	2P+⊕	55	30 - 3x2,5	1,8 - 3,6 kW	1
EC6992335	-	4	-	3P+⊕	55	30 - 4x2,5	4,5 - 11,0 kW	1
EC6992336	-	-	4	3P+N+⊕	55	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992337	2	-	2	3P+N+⊕	55	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992338	3	1	-	3P+N+⊕	55	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992339	3	-	1	3P+N+⊕	55	30 - 5x2,5	5,0 - 11,0 kW	1



EC6992334

INDUSTRIAL CABLE REELS SERIES 699

MAIN TECHNICAL FEATURES:

- Cable reel with galvanized and painted galvanized metallic support, equipped with handle for rewinding.
- Rated voltage 230/400V~ - 50Hz - insulation voltage 500/690V~.
- Drum with internal automatic brake system and cable blocking clamp.
- Thermal circuit breaker >55°C restorable.
- Cable H07NRF - double insulation HAR.
- Products complying with the Standards EN 61242, EN 61316.
- Single package in strong cardboard boxes suitable for transport and storage.
- Dimensions 255x430x520 mm.
- **Different combinations supplied on request.**

IP44
IP55



GREY RAL 7035

Industrial cable reels - 4 sockets EN 60309 16A - Ø 400 mm - 50 MT cable

ITEM	SOCKETS			PLUG EN 60309 16A	IP	CABLE MT	POWER KW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	EN 309 2P+⊕	EN 309 3P+⊕	EN 309 3P+N+⊕					
EC6992320L	2	2	-	3P+N+⊕	44	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992324L	4	-	-	2P+⊕	44	50 - 3x2,5	1,6 - 3,6 kW	1
EC6992325L	-	4	-	3P+⊕	44	50 - 4x2,5	4,0 - 11,0 kW	1
EC6992326L	-	-	4	3P+N+⊕	44	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992327L	2	-	2	3P+N+⊕	44	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992328L	3	1	-	3P+N+⊕	44	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992329L	3	-	1	3P+N+⊕	44	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992330L	2	2	-	3P+N+⊕	55	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992334L	4	-	-	2P+⊕	55	50 - 3x2,5	1,6 - 3,6 kW	1
EC6992335L	-	4	-	3P+⊕	55	50 - 4x2,5	4,0 - 11,0 kW	1
EC6992336L	-	-	4	3P+N+⊕	55	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992337L	2	-	2	3P+N+⊕	55	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992338L	3	1	-	3P+N+⊕	55	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992339L	3	-	1	3P+N+⊕	55	50 - 5x2,5	4,0 - 11,0 kW	1



EC6992320L

INDUSTRIAL CABLE REELS SERIES 699

MAIN TECHNICAL FEATURES:

- Cable reel with galvanized and painted galvanized metallic support, equipped with handle for rewinding.
- Rated voltage 230/400V~ - 50Hz - insulation voltage 500/690V~.
- Drum with internal automatic brake system and cable blocking clamp.
- Thermal circuit breaker >55°C restorable.
- Cable H07NRF - double insulation HAR.
- Products complying with the Standards EN 61242, EN 61316.
- Single package in strong cardboard boxes suitable for transport and storage.
- Dimensions 375x475x800 mm.
- **Different combinations supplied on request.**

IP44
IP55



GREY RAL 7035

Mobile industrial cable reels - 4 sockets EN 60309 16A - Ø 400 mm - 30 MT cable

ITEM	SOCKETS			PLUG EN 60309 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	EN 309 2P+⊕	EN 309 3P+⊕	EN 309 3P+N+⊕					
EC6992320M	2	2	-	3P+N+⊕	44	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992324M	4	-	-	2P+⊕	44	30 - 3x2,5	1,8 - 3,6 kW	1
EC6992325M	-	4	-	3P+⊕	44	30 - 4x2,5	4,5 - 11,0 kW	1
EC6992326M	-	-	4	3P+N+⊕	44	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992327M	2	-	2	3P+N+⊕	44	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992328M	3	1	-	3P+N+⊕	44	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992329M	3	-	1	3P+N+⊕	44	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992330M	2	2	-	3P+N+⊕	55	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992334M	4	-	-	2P+⊕	55	30 - 3x2,5	1,8 - 3,6 kW	1
EC6992335M	-	4	-	3P+⊕	55	30 - 4x2,5	4,5 - 11,0 kW	1
EC6992336M	-	-	4	3P+N+⊕	55	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992337M	2	-	2	3P+N+⊕	55	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992338M	3	1	-	3P+N+⊕	55	30 - 5x2,5	5,0 - 11,0 kW	1
EC6992339M	3	-	1	3P+N+⊕	55	30 - 5x2,5	5,0 - 11,0 kW	1



EC6992324M

INDUSTRIAL CABLE REELS SERIES 699

MAIN TECHNICAL FEATURES:

- Cable reel with galvanized and painted galvanized metallic support, equipped with handle for rewinding.
- Rated voltage 230/400V~ - 50Hz - insulation voltage 500/690V~.
- Drum with internal automatic brake system and cable blocking clamp.
- Thermal circuit breaker >55°C restorable.
- Cable H07NRF - double insulation HAR.
- Products complying with the Standards EN 61242, EN 61316.
- Single package in strong cardboard boxes suitable for transport and storage.
- Dimensions 375x475x800 mm.
- **Different combinations supplied on request.**


IP44
IP55



GREY RAL 7035

Mobile industrial cable reels - 4 sockets EN 60309 16A - Ø 400 mm - 50 MT cable

ITEM	SOCKETS			PLUG EN 60309 16A	IP	CABLE MT	POWER KW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	 EN 309 2P+⊕	 EN 309 3P+⊕	 EN 309 3P+N+⊕					
EC6992320LM	2	2	-	3P+N+⊕	44	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992324LM	4	-	-	2P+⊕	44	50 - 3x2,5	1,6 - 3,6 kW	1
EC6992325LM	-	4	-	3P+⊕	44	50 - 4x2,5	4,0 - 11,0 kW	1
EC6992326LM	-	-	4	3P+N+⊕	44	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992327LM	2	-	2	3P+N+⊕	44	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992328LM	3	1	-	3P+N+⊕	44	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992329LM	3	-	1	3P+N+⊕	44	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992330LM	2	2	-	3P+N+⊕	55	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992334LM	4	-	-	2P+⊕	55	50 - 3x2,5	1,6 - 3,6 kW	1
EC6992335LM	-	4	-	3P+⊕	55	50 - 4x2,5	4,0 - 11,0 kW	1
EC6992336LM	-	-	4	3P+N+⊕	55	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992337LM	2	-	2	3P+N+⊕	55	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992338LM	3	1	-	3P+N+⊕	55	50 - 5x2,5	4,0 - 11,0 kW	1
EC6992339LM	3	-	1	3P+N+⊕	55	50 - 5x2,5	4,0 - 11,0 kW	1

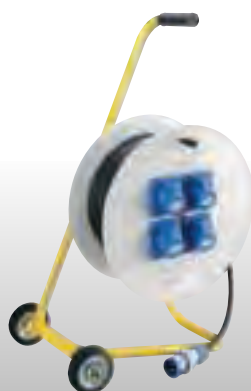

EC6992324LM

INDUSTRIAL CABLE REELS SERIES 699

MAIN TECHNICAL FEATURES:

- Cable reel with galvanized and painted galvanized metallic support, equipped with handle for rewinding.
- Rated voltage 230/400V~ - 50Hz - insulation voltage 500/690V~.
- Drum with internal automatic brake system and cable blocking clamp.
- Thermal circuit breaker >55°C restorable.
- Cable H07NRF - double insulation HAR.
- Products complying with the Standards EN 61242, EN 61316.
- Single package in strong cardboard boxes suitable for transport and storage.
- Dimensions 375x475x800 mm.
- **Different combinations supplied on request.**



IP55

GREY RAL 7035

Industrial cable reels - 1 interlocked socket without fuse holder EN 60309 16A - Ø 400 mm - 30 MT cable

ITEM	SOCKETS			PLUG EN 60309 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	EN 309 2P+⊕	EN 309 3P+⊕	EN 309 3P+N+⊕					
EC69991	1	-	-	2P+⊕	55	30 - 3x2,5	1,8 - 3,6 kW	1
EC69993	-	1	-	3P+⊕	55	30 - 4x2,5	4,5 - 11,0 kW	1
EC69995	-	-	1	3P+N+⊕	55	30 - 5x2,5	5,0 - 11,0 kW	1

Industrial cable reels - 1 interlocked socket without fuse holder EN 60309 16A - Ø 400 mm - 50 MT cable

ITEM	SOCKETS			PLUG EN 60309 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	EN 309 2P+⊕	EN 309 3P+⊕	EN 309 3P+N+⊕					
EC69991L	1	-	-	2P+⊕	55	50 - 3x2,5	1,6 - 3,6 kW	1
EC69993L	-	1	-	3P+⊕	55	50 - 4x2,5	4,0 - 11,0 kW	1
EC69995L	-	-	1	3P+N+⊕	55	50 - 5x2,5	4,0 - 11,0 kW	1

Industrial cable reels - 1 interlocked socket without fuse holder EN 60309 32A - Ø 400 mm - 30 MT cable

ITEM	SOCKETS			PLUG EN 60309 16A	IP	CABLE MT	POWER kW ROLLED/ EXTENDED CABLE	PACKAGING PIECES
	EN 309 2P+⊕	EN 309 3P+⊕	EN 309 3P+N+⊕					
EC69996	1	-	-	2P+⊕	55	30 - 3x4	2,5 - 5,0 kW	1
EC69997	-	1	-	3P+⊕	55	30 - 4x4	7,0 - 14,0 kW	1
EC69999	-	-	1	3P+N+⊕	55	30 - 5x4	7,0 - 14,0 kW	1



EC69991

INDUSTRIAL EXTENSIONS **SERIES 699**

MAIN TECHNICAL FEATURES:

- Industrial extensions for mobile connection.
- Rated voltage 230/400V~ - 50Hz - insulation voltage 500/690V~.
- Cable H07NRF - double insulation HAR.
- Cable complying with the EU standards 64-8V7 for use on construction sites.
- High degree of flexibility even at low temperatures.
- Resistant to wear, abrasion and compression.
- Use extension cords completely extended.



IP44

IP67

Industrial extensions EN 60309 plug and socket 16A - IP44

ITEM	TYPE	SOCKET EN 60309 16A	PLUG EN 60309 16A	IP	CABLE MT	POWER kW EXTENDED CABLE	PACKAGING PIECES
EC699P10		2P+⊕	2P+⊕	44	10 - 3x2,5	3,6 kW	1
EC699P11		3P+⊕	3P+⊕	44	10 - 4x2,5	11,0 kW	1
EC699P12		3P+N+⊕	3P+N+⊕	44	10 - 5x2,5	11,0 kW	1
EC699P13		2P+⊕	2P+⊕	44	20 - 3x2,5	3,6 kW	1
EC699P14		3P+⊕	3P+⊕	44	20 - 4x2,5	11,0 kW	1
EC699P15		3P+N+⊕	3P+N+⊕	44	20 - 5x2,5	11,0 kW	1
EC699P16		2P+⊕	2P+⊕	44	30 - 3x2,5	3,6 kW	1
EC699P17		3P+⊕	3P+⊕	44	30 - 4x2,5	11,0 kW	1
EC699P18		3P+N+⊕	3P+N+⊕	44	30 - 5x2,5	11,0 kW	1

Industrial extensions EN 60309 plug and socket 16A - IP67

ITEM	TYPE	SOCKET EN 60309 16A	PLUG EN 60309 16A	IP	CABLE MT	POWER kW EXTENDED CABLE	PACKAGING PIECES
EC699P20		2P+⊕	2P+⊕	67	10 - 3x2,5	3,6 kW	1
EC699P21		3P+⊕	3P+⊕	67	10 - 4x2,5	11,0 kW	1
EC699P22		3P+N+⊕	3P+N+⊕	67	10 - 5x2,5	11,0 kW	1
EC699P23		2P+⊕	2P+⊕	67	20 - 3x2,5	3,6 kW	1
EC699P24		3P+⊕	3P+⊕	67	20 - 4x2,5	11,0 kW	1
EC699P25		3P+N+⊕	3P+N+⊕	67	20 - 5x2,5	11,0 kW	1
EC699P26		2P+⊕	2P+⊕	67	30 - 3x2,5	3,6 kW	1
EC699P27		3P+⊕	3P+⊕	67	30 - 4x2,5	11,0 kW	1
EC699P28		3P+N+⊕	3P+N+⊕	67	30 - 5x2,5	11,0 kW	1



EC699P10