



# Cabling systems




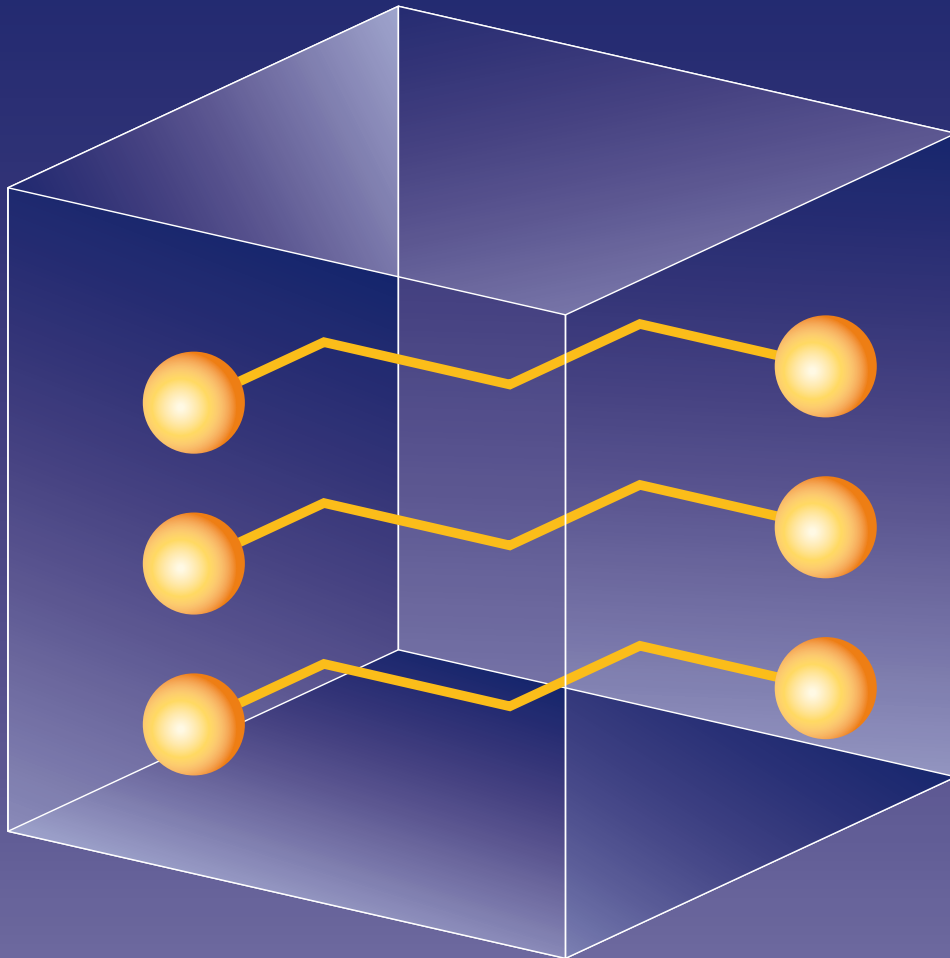


# OUR RANGE OF PRODUCTS



CABLING SYSTEMS



BUILDING AUTOMATION



FIRE SYSTEMS



CABLE LAYING SYSTEMS



COMPONENTS FOR  
ELECTRICAL INSTALLATION  
TECHNOLOGY



# ABOUT US



Head office in MuttENZ



Subsidiary in Hölstein

## FAMILY FIRM WITH AN INVENTIVE SPIRIT

Woertz has been working as a competent electrical installation technology partner for more than 80 years now. Our many decades of experience are your guarantee for the best possible results. We have the correct screw terminal, flat cable, or plinth duct for your requirements. As a Swiss family firm, we are committed to Swiss values, which are evident in the quality of our products and services as well as the innovation and inventiveness we exhibit in the areas of research and development. Our products are 100% «made in Switzerland».

## PRODUCTS

Woertz is the leading provider of comprehensive installation systems and components for electrical installation technology in buildings and infrastructures. These networks form the unseen lifelines of the technical configuration of buildings.

A wide variety of technologies are firmly anchored at Woertz. This fact allows us to address different customer requirements with a wide range of systems and services that meet these demands.

## WOERTZ - YOUR PARTNER FOR COMPREHENSIVE SOLUTIONS

As a reliable partner, Woertz provides its customers with impeccable quality. The development of pioneering innovations lies at the centre of our accomplishments.

This is evident across our entire company history since 1972 - the year of our first flat cable patent - and extends to the publishing of more than 20 patents.

## THE FUTURE

New products have been developed in the area of building automation and security, including complete solutions in the area of tunnel construction.

Innovative development and many years' experience with flat cable technology form the basis for the design of a new safe flat cable. Our objective is to fulfill the strictest European guidelines ensuring a system guarantee of 100%.

## SYSTEM AREAS

Our range can be seen in five different brochures:

- flat cable systems
- building automation
- safety systems
- cable laying systems
- components for electrical installation technology



Swiss made

**woertz**



# CONTENTS



P | 6 Introduction

P | 18 Standards



P | 24 data 2x1.5 mm<sup>2</sup>



P | 87 Accessories



P | 28 multibus 4x1.5 mm<sup>2</sup>



P | 88 Illumination cables and sockets




P | 34 3G2.5 mm<sup>2</sup>  
3G4 mm<sup>2</sup>

## IP68



P | 38 Technofil 5G1.5 mm<sup>2</sup>  
and 5G2.5 mm<sup>2</sup>



P | 92 IP 3G2.5 mm<sup>2</sup>  
IP 3G4 mm<sup>2</sup>



P | 44 power  
5G2.5 mm<sup>2</sup>



P | 96 power IP  
5G2.5 mm<sup>2</sup>



P | 50 combi  
5G2.5 mm<sup>2</sup>+2x1.5 mm<sup>2</sup>



P | 100 combi IP  
5G2.5 mm<sup>2</sup>+2x1.5 mm<sup>2</sup>



P | 58 Dali  
5G2.5 mm<sup>2</sup>+2x1.5 mm<sup>2</sup>



P | 104 power IP  
5G6 mm<sup>2</sup>



P | 64 5G4 mm<sup>2</sup>

## FE180 - E90 *Refer to our catalogue on Fire Protection Systems Reference P | 109*



P | 68 7G2.5 mm<sup>2</sup>  
7G4 mm<sup>2</sup>



FE180 3G2.5 mm<sup>2</sup>



P | 72 5G10 mm<sup>2</sup>



FE180 3G4 mm<sup>2</sup>



S | 76 5G16 mm<sup>2</sup>



FE180 5G2.5 mm<sup>2</sup>



S | 82 Connectors



Accessories

# INTRODUCTION

## Requirements for installation systems

Comfort, reliability, flexibility and optimum cost-effectiveness are the central requirements of builders and investors. Installation systems must guarantee high operational reliability of the controlled functions and efficient adaptation to changing user requirements after installation. System solutions from Woertz ensure that the desired comfort functions such as lighting, security, room temperature, weather protection and others can be implemented.

The quality of cabling systems is thus defined by the investment and maintenance costs for possible repairs and changes or alternatively expansions as well as the operational reliability of the functions connected to it. Misconceptions in the holistic view of the system can lead to increased material and installation costs as well as unexpected additional time and effort for planning and installation. On the other hand, misinterpreted savings can lead to considerable reliability risks as well as to high costs for troubleshooting and network expansion.

## Summary


The requirements of a professional installation system can be summarised as follows:

- 1) efficient planning and quick, error-free installation
- 2) low-loss, operationally reliable connections
- 3) long service life with an option for subsequent changes / expansions
- 4) compatibility with upstream and downstream systems as well as new technologies
- 5) optimum cost-effectiveness in connection with the complete installation and service life

The following considerations concern cabling systems and product features for functional buildings, industrial building use and infrastructure buildings. The same principles apply to all types of buildings and infrastructure facilities.

# We differentiate between two types of cable installation


## The principle of conventional cabling systems

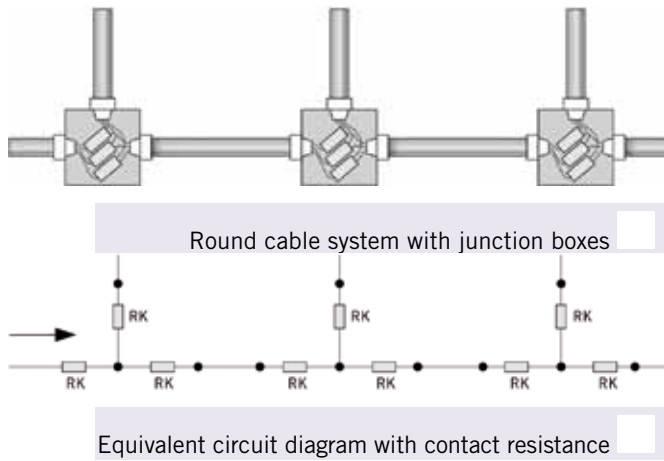

Junction box wired with a three-strand round cable

The planned cabling concept is adapted locally during the installation. That way planning mistakes can still be corrected and changes can be taken into consideration at short notice. This applies in particular to subsequent expansion of the cable network.

Electrical installation systems using round cables contain a high number of partition and contact points with many potential risks and possible mistakes. The installation work can thus only be performed by qualified workers. Each cable break is a potential weak point and leads to energy loss. Serial placement of the junction boxes can result in a large-scale failure of the energy distribution in the event of a fault.

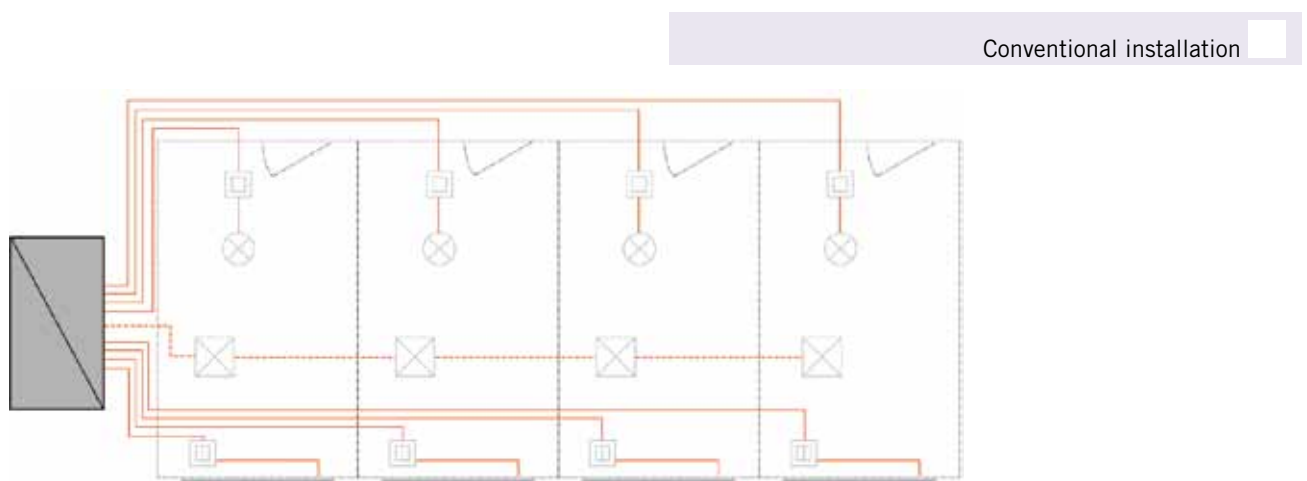

# Woertz®: Inventors of innovative flat cable technology



Flat cable system: Patent specification No. 523 579, 1972

Conventional round cable systems are often incapable of fulfilling the high and diverse requirements of buildings and infrastructure buildings. As early as the start of the 1970s, Woertz® decided to offer builders and investors an electrical installation concept that completely meets their demands. Woertz developed an innovative flat cable system and successfully patented it in 1973 as the legal inventor.


Woertz® flat cable technology has proven itself with planning and installation companies in the market up until now, and is constantly being developed even further. Other manufacturers recognize the benefits of this product solution as well and have integrated the Woertz® flat cable in their product ranges.

## The concept of Woertz® flat cable systems

The flat cable system has the following advantages compared to conventional cabling systems:

- a modular, flexible and economical installation system with high operational reliability and capacity
- the leads in the flat cable run parallel and facilitate easy access to the individual leads via junction boxes that can be placed anywhere using a piercing method that does not require stripping,
- reverse polarity protected installation with a short commissioning time and a great reduction in the amount of cable required (fire load reduction), short installation times and less risk of making mistakes,
- the flat cable system allows for pre-assembly of ready-to-install cable segments, and can be adapted at short notice to changed requirements in all phases of construction and utilisation,
- expansion options with data cables for power supply and control of building automation modules without additional cabling





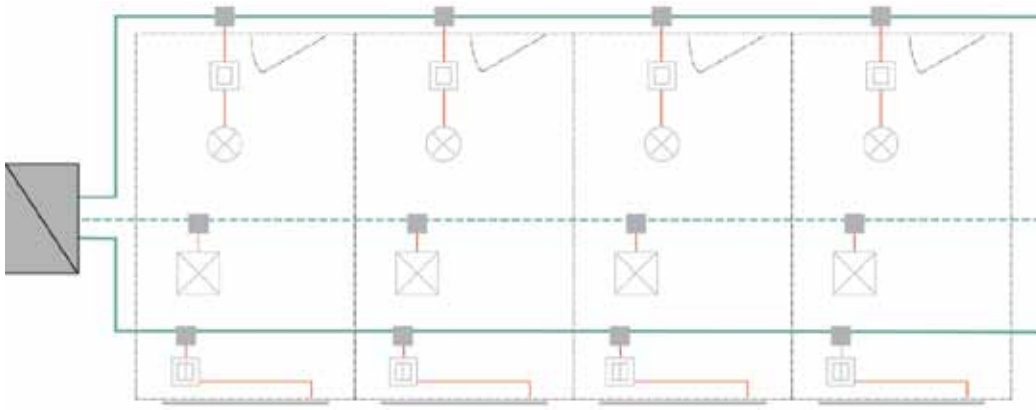

### Security

No breaks are required in the Woertz® flat cable system at any point during installation or expansion. Fewer contact points and less cable overall mean fewer potential risks. The quantity of cable is reduced, so the thermal load can be reduced.

### Functional principle

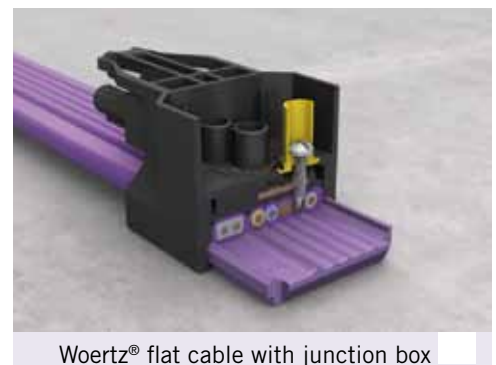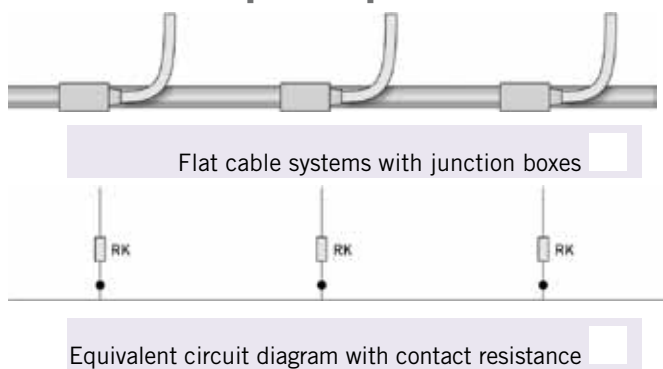

The principle of Woertz® flat cable systems is that connections and branches can be created at any point directly and efficiently without any cable breaks. Cable connections and boxes can be moved, added or removed as required later on.

The parallel running leads in the cable make it possible to easily access the individual leads through quick installation of feed-in and branching boxes that use an insulation-piercing method.


Preparatory work such as stripping cables, separating leads or preparing the ends is completely unnecessary. The asymmetric profile of the cable ensures that the boxes can only be mounted in a specific position, so that all leads and connections are automatically placed correctly. The lack of cable breaks means less contact resistance and loss in the electric circuit, as well as a reduction in potential sources of mistakes. At the same time, it results in increased operational reliability, as the failure of a junction box has no effect on the downstream units.

The planned cabling concept can still be adapted on-site during the installation, by changing a cable length or the number of junction boxes, for example. Planning mistakes can thus be corrected and changes at short notice can be accommodated.

This flexibility reduces the prior planning and measuring work as well as the amount of cable material that is necessary. The considerable savings in cable material, installation work and time clearly improves profitability. This modular system also permits pre-assembly of ready-to-install flat cable lengths that can be installed on-site at the construction site in a relatively short amount of time, and thus efficiency and yield also increase.

## Woertz® flat cable connector

The Woertz® connecting principle consists of mounting the junction boxes on the flat cable with an insulation-piercing method. These clamping devices consist of screws or blades that pierce the insulation of the cable by screwing or cutting in respectively thereby establishing a contact with the individual leads. The outgoing leads are then connected to the screws or blades so that they become live. The main line – i.e. the flat cable – does not have to be stripped or cut during this procedure, and the junction boxes can be attached at any place on the cable.

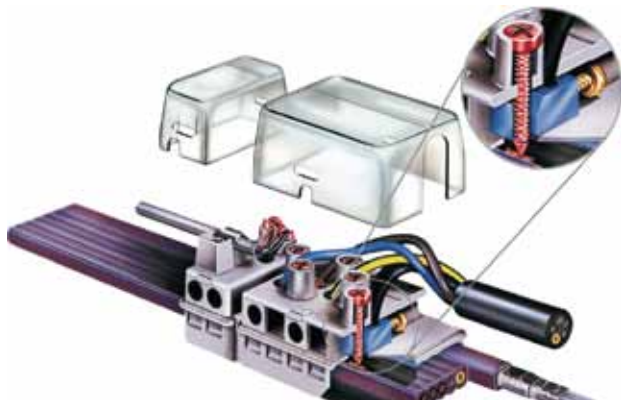

Piercing screws



Woertz combi cable

The insulation-penetrating piercing screws are shown in red. The contact elements and connecting screws for the outgoing leads are in blue and gold. Tapping screws pierce the insulation of the flat cable and the individual leads (black jacket in this case) and contact the copper lead reliably and without stripping.

## The patented Woertz® piercing method



### Contacting metal parts

At least two elements are required for a contact. Only careful matching of both elements can lead to an optimum result. One-sided adaptation of one element cannot compensate for any inadequacies in the other.

The most important value of an electrical contact is the transition resistance, which is determined by the following physical characteristics:


The increased connection resistance in the live elements resulting from the construction-related constriction of the current paths to the contact surfaces.

The actual contact resistance from one contact element to the other. This is essentially affected by the size of the contact surface, coupling of materials, surface quality, impurity layers and surface pressure. In addition, there are direct cross-connections and dependencies between these parameters.

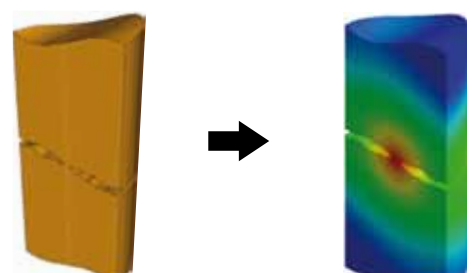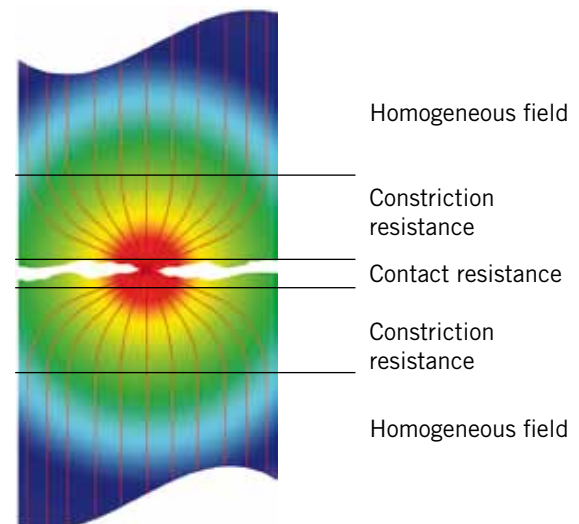

Electrical lines, contact set-up



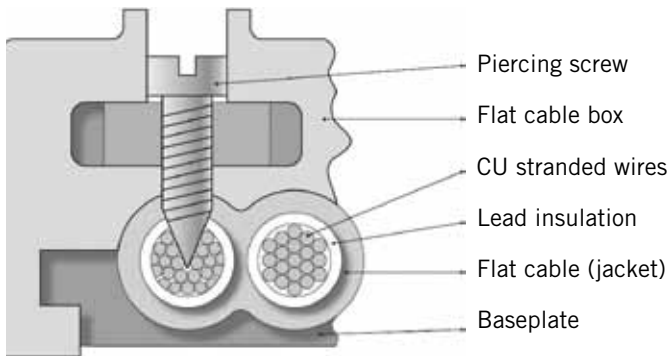

### Piercing contact with flat cables

This principle requires a specific set-up regarding penetration of the insulation, the contact and the pressure build-up at the contact points, as well as the long-term reliability, and it places specific requirements on the cable leads. A piercing contact makes use of special tapping screws or blades and is always on cable strands.



The tapping screw or the blade penetrates the insulation of the flat cable and enters the cable strand. This process pushes the stranded wires apart and as a result the individual wires come into contact with a large area of the screw or blade.

Due to the tension on the individual wires, there is surface pressure on the contact surfaces. This large-area pressure on the contact elements promotes the current transfer between the individual wires and ensures low resistance values.

Force development on the contact surfaces and between the individual wires for Woertz® contacts



## Variations of the Woertz® piercing method



Contact: Tapping screws

Connection: Screwed



Contact: Tapping screws

Connection: Plugged



Contact: Blades

Connection: Screwed

### Piercing contact with Woertz® data cables

In the “building automation” field of application, the flat cable from Woertz® is used in combination with a data cable. In order to prevent interference, the data cable is shielded by closed foil running longitudinally.

A tapping screw or a blade with an insulated intermediate piece is used (Woertz® patent) for the piercing contact of such a data cable. Any possible short-circuit between the lead and the shielding is excluded by this conductor insulation.

The cable shielding - a solution patented by Woertz® - guarantees that the insulated screw or blade never encounters a shield overlap. The retracted shielding foil ensures a clean piercing method and prevents faults.


## Woertz® flat cable for high cost-effectiveness and efficiency

### Capacity of Woertz® flat cable systems

With a flat cable, the heat from the individual leads is given off directly to the outside. In addition, flat cables ensure efficient air cooling and hence greater capacity due to the considerably larger external surface compared to a round cable. In round cables, there is a converse negative effect, because the leads heat each other up due to the compact placement.

This phenomenon means that a flat cable has a lower temperature than a round cable under the same load and can thus carry considerably more current.

Temperature development of a flat cable compared to a round cable

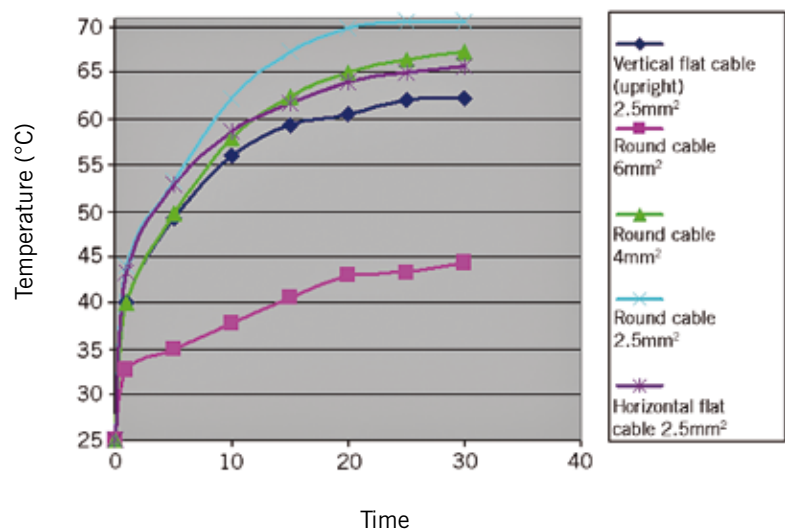

Tests have shown that with the same temperature increase, a flat cable can bear more than twice as much. A flat cable with a smaller Cross-section than a round cable can be used for the same load, which means direct cost savings. Depending on the Cross-section and taking the laying system into consideration, the capacity is regulated by standards and laying regulations.



# Benefits

## Benefits in general

The tenants in a building – and thus their needs – will often change in the course of the building's useful life. Morn technical installations must be designed to cope with this. Woertz® flat cable systems provide a way for connections to be established or relocated at any point and at any time – and without cable breaks! Furthermore, all this with considerably reduced installation times.

## Benefits for builders/investors

Flexible installations can be adapted more easily to the changing requirements of the tenants – requirements that often do not yet exist when the building is under construction. With Woertz® flat cable systems, installations are ready to deal with the requirements of future office facilities. Smaller adjustments generate less work, noise and dust. Even in locations where workstations have to be frequently refitted, rewiring options with flat cable installations can be adapted with a minimum of effort.

## Benefits for planners

Woertz® flat cable systems provide the necessary flexibility in situations in which connection points cannot be defined in advance. The installation outlay is significantly reduced for cases where many connections are required in close mutual proximity. High quality planning sets the course for future use, and can react flexibly to short-term changes during the set-up phase – because with flat cable installations from Woertz®, the planner is on the safe side.

## Benefits for electrical contractors

Fewer cable breaks and less wiring means fewer potential sources of faults. Thanks to the asymmetric profile of the Woertz® flat cable, the risk of incorrect connections can be practically excluded. The modular system also supports the electrical contractor who is working to deadlines.


## Time saving thanks to prefabrication

On request, Woertz® will deliver pre-assembled, ready-to-install flat cables including feed-in and junction boxes. On request, we can provide flat cable boxes with pre-assembled connection lines. If need be, the consumers to be connected can also be delivered preinstalled and wired. The pre-assembled systems and components can be quickly and efficiently installed at the construction site afterwards.

# Installation comparison


Installation with round cable

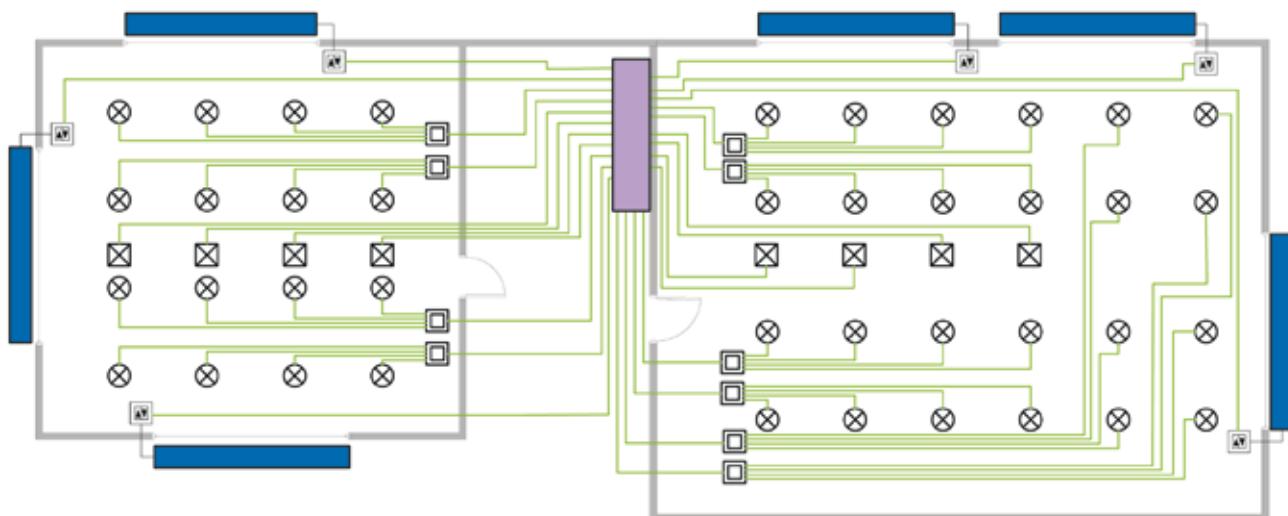

used cable length: 320 m



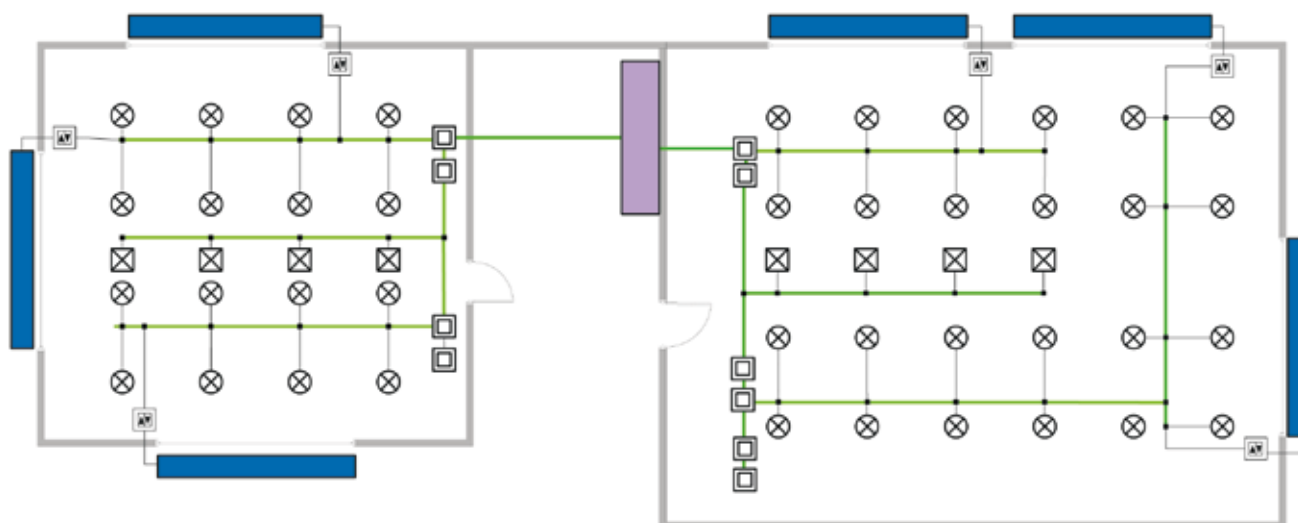

Installation with Woertz flat cable

used cable length: 50 m



 Shutter control system  
 Lighting


 Push-button  
 Floor box

 Blinds  
 Subdistribution board

# SMI cabling concept with Woertz® flat cable systems

## SMI drives 230VAC with flat cable system 5x2.5+2x1.5mm<sup>2</sup> IP68


(Flat cable 49864/FRNC, end piece 48510/07)

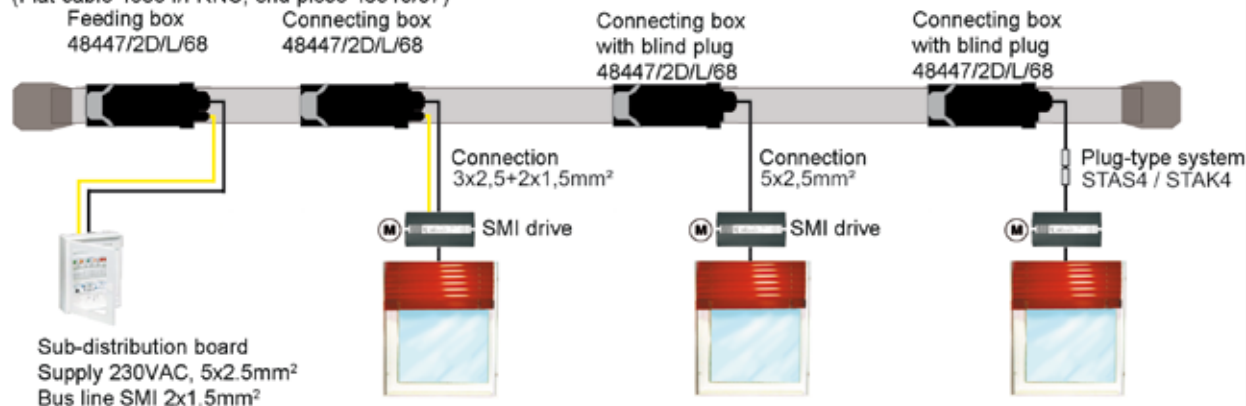

For outdoor use (facades)

## SMI drives 230VAC with flat cable system 5x2.5


(Flat cable 49845 PCV or 49846 FR/LSOH, end piece 48510/05 / Flat cable 5x2.5, IP68 may also be used)

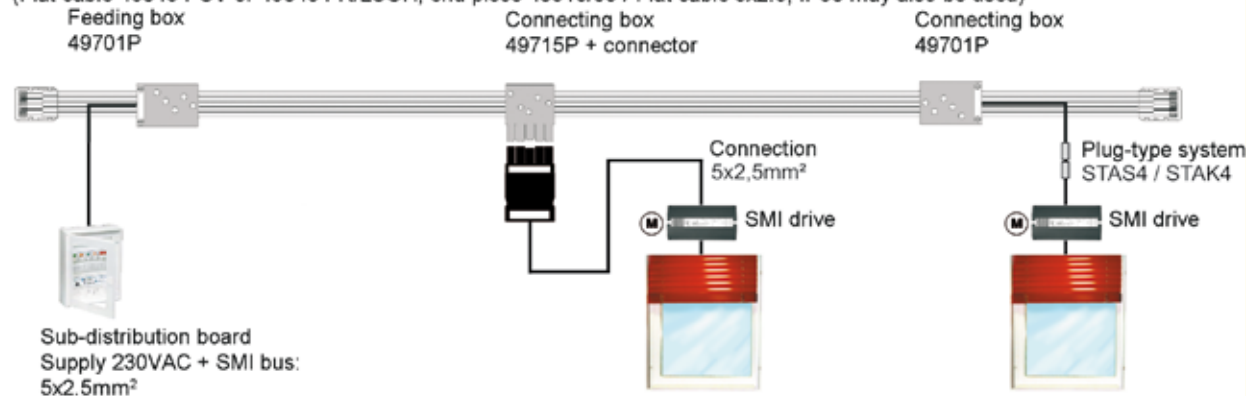



Flat cable installation for indoor use (ceiling, floor, duct)

## SMI BT drives with flat cable system Multibus 4x1.5mm<sup>2</sup>


(Flat cable 49651, end piece 48510/06)

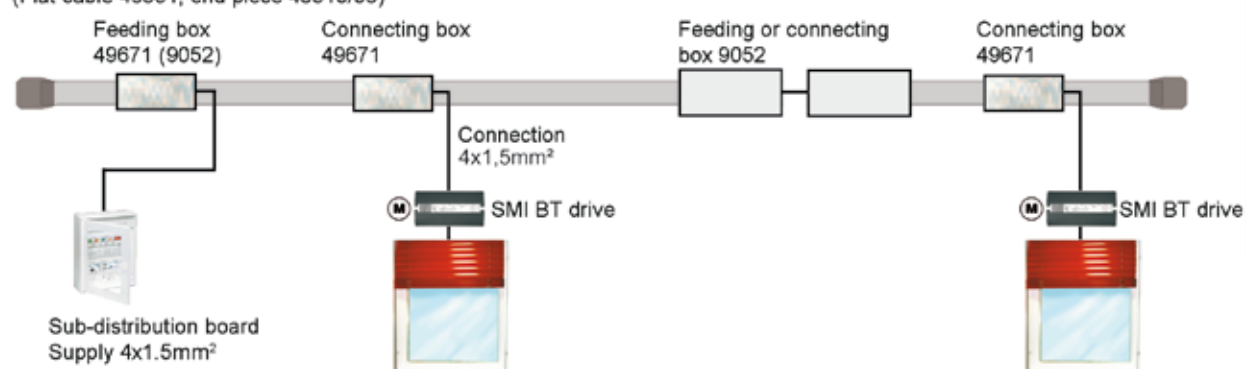



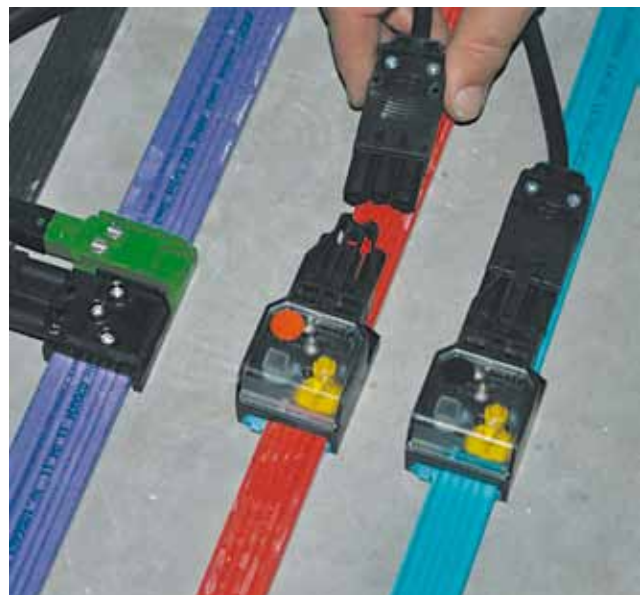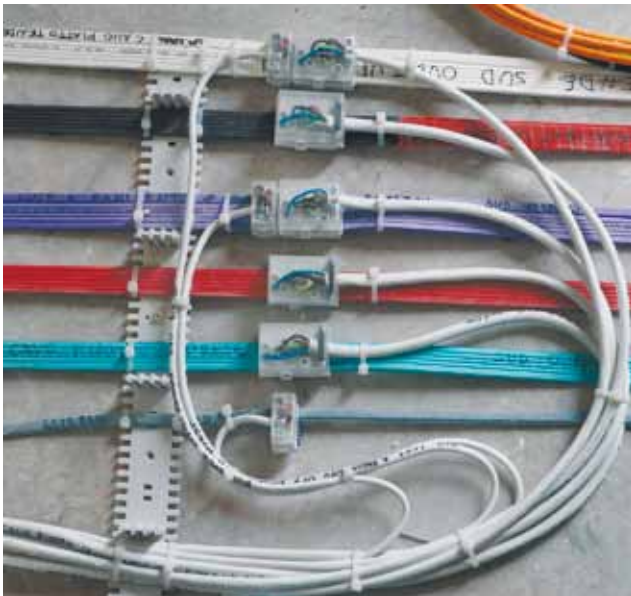



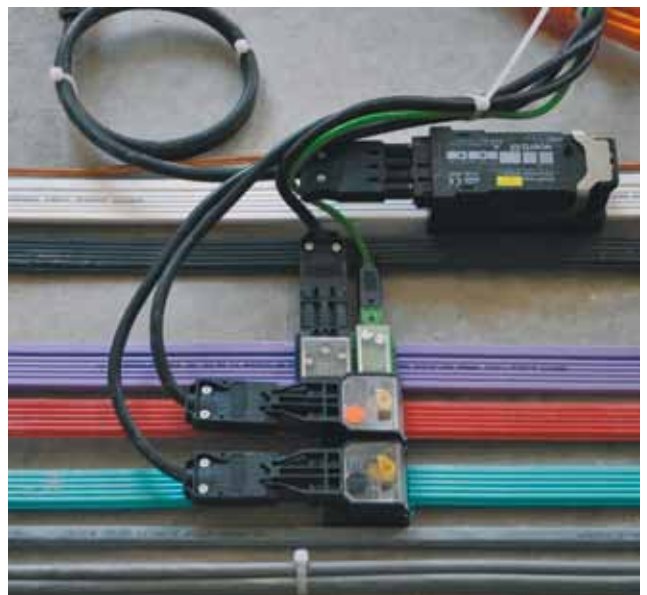














## Woertz® flat cable: examples of application




















# Properties of materials and standards

Cross-sectional view	Art. No.	Description	Type							Catalogue Section			
				Flame propagation IEC 60332-1-2	Halogen-free IEC 60754-1/2	Smoke density	Flame spread EN 603323	Circuit integrity IEC 60331	System circuit integrity DIN 4102	IP20-System	IP68-System	FE180-System	
Data cable													
	49949	Woertz data 2x1.5 mm <sup>2</sup>	PVC 1)	<input checked="" type="checkbox"/>						P.24-27			
	49948		Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
	49651	Woertz multibus 4x1.5xmm <sup>2</sup>	Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			P.28-33			
Installation cable													
	49685	Woertz 3G2.5 mm <sup>2</sup>	 PVC 1)	<input checked="" type="checkbox"/>						P.34-37	P.90-93		
	49686		Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
	49646	Woertz 3G4 mm <sup>2</sup>	Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
	9040	Woertz Technofil 5G1.5 mm <sup>2</sup>	PVC 1)	<input checked="" type="checkbox"/>						P.38-43			
	9055	Woertz Technofil 5G2.5 mm <sup>2</sup>	PVC 1)	<input checked="" type="checkbox"/>									
	49900		Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
	49845	Woertz Power 5G2.5 mm <sup>2</sup>	PVC 1)	<input checked="" type="checkbox"/>						P.44-49			
	49846		Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
	49863	Woertz Power 5G2.5 mm <sup>2</sup>	Halogen-free 2)	<input checked="" type="checkbox"/>							P.94-97		
	49404	Woertz Power 5G4 mm <sup>2</sup>	PVC 1)	<input checked="" type="checkbox"/>						P.64-67			
	49405		Halgenfrei 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
	48780	Woertz Power IP 5G6 mm <sup>2</sup>	Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				P.102-104		
	49884	Woertz Power 5G10 mm <sup>2</sup>	PVC 1)	<input checked="" type="checkbox"/>						P.72-75			
	49885		Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
	49605	Woertz Power 5G16 mm <sup>2</sup>	 PVC 1)	<input checked="" type="checkbox"/>						P.76-81			
	49606		Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
	49600	Woertz 7G2.5 mm <sup>2</sup>	 PVC 1)	<input checked="" type="checkbox"/>						P.68-71			
	49601	Woertz 7G2.5 mm <sup>2</sup>	Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
	49401	Woertz 7G4 mm <sup>2</sup>	Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>						
1) Insulation of the leads PVC coat EN 50363-3,				Outside PVC coat EN 50363-4									
2) Insulation of the leads halogen-free coat HD 604-5H,				Outside halogen-free coat IEC 60502-1									
3) Insulation of the leads halogen-free coat VDE 0266,				Outside halogen-free coat VDE 0266									

# Properties of materials and standards

Cross-sectional view	Art. No.	Description	Type							Catalogue Section		
				Flame propagation IEC 60332-1-2	Halogen-free IEC 60754-1/2	Smoke density	Flame spread EN 603323	Circuit integrity IEC 60331	System circuit integrity DIN 4102	IP20-System	IP68-System	FE180-System
Installation cable with data cable												
	49945	Woertz combi 5G2.5+2x1.5 mm <sup>2</sup>	PVC 1)	<input checked="" type="checkbox"/>						P. 50-57		
	49946		Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
	49946	Woertz DALI 5G2.5+2x1.5 mm <sup>2</sup>	Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>			P. 58-63		
	49864 FRNC	Woertz combi IP 5G2.5+2x1.5 mm <sup>2</sup>	Halogen-free 2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				P. 92-95	
Illumination cable												
	9068	Illumination cable 2x2.5 mm <sup>2</sup>	PVC	<input checked="" type="checkbox"/>							P. 88-89	
Safety cable (Security cable)												
	482500R	Woertz FE180 3G2.5 mm <sup>2</sup>	Halogen-free 3)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	E90*			P. 108-120
	484500R	Woertz FE180 3G4 mm <sup>2</sup>	Halogen-free 3)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	E90*			
	483500R	Woertz FE180 5G2.5 mm <sup>2</sup>	Halogen-free 3)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	E90*			
	486500R	Woertz FE180 5G4 mm <sup>2</sup>	Halogen-free 3)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	E90*			
	489500R	Woertz FE180 5G16 mm <sup>2</sup>	Halogen-free 3)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	E90*			

- 1) Insulation of the leads PVC coat EN 50363-3,  
2) Insulation of the leads halogen-free coat HD 604-5H,  
3) Insulation of the leads halogen-free coat VDE 0266,

- Outside PVC coat EN 50363-4  
Outside halogen-free coat IEC 60502-1  
Outside halogen-free coat VDE 0266



Woertz cables are made of high-quality, flame-resistant material, are flame retardant and self-extinguishing.

Flame retardant  
Standards: IEC 60332-1-2 und EN 60332-1-2



Woertz cables have a low fire acceleration. The spread of fire from the ignition point, is therefore severely restricted.

Flame spread  
Standards: IEC 60 332-3-24 und EN 60 332-3-24



Woertz cables are halogen-free and reduce to a minimal possible damage to health or property.

Halogen-free and no corrosive gases  
Standards: IEC 60 754-1/2 und EN 50 267-2-1/2



Woertz cables with insulation endurance FE180, guarantee, the functioning of a cable, in case of a fire over a period of 180 minutes.

Circuit integrity FE180  
Standards: IEC 60331-21



Woertz cable under the influence of fire, develops minimal smoke emission. Thus, escape and emergency routes are not affected.

Smoke density  
Standards: IEC 61 034-2 und EN 61 034-2



Woertz cables, including fastening systems guarantee the functioning of the entire electric cable system over a defined period of time.


System circuit integrity E90  
Standards: DIN 4102-12






# Neutral current

In a single-phase network, the same current always has to flow in the neutral conductor, as in the phase conductor.

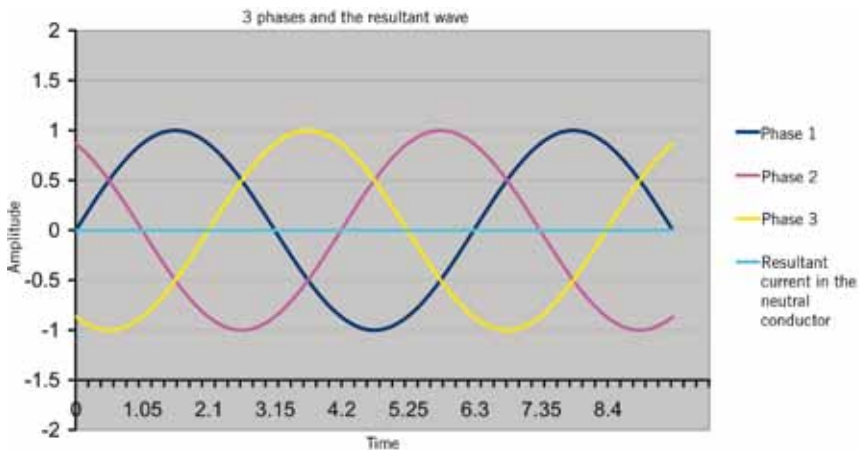


In electrical networks with three phases, voltages with a periodic sinusoidal form are generated in the phase conductors, but the sequences are shifted time-wise by a third of a period. In this case, as a result of these processes that are running periodically, when the voltages are combined together (neutral point), the result at each point in time is „0“.

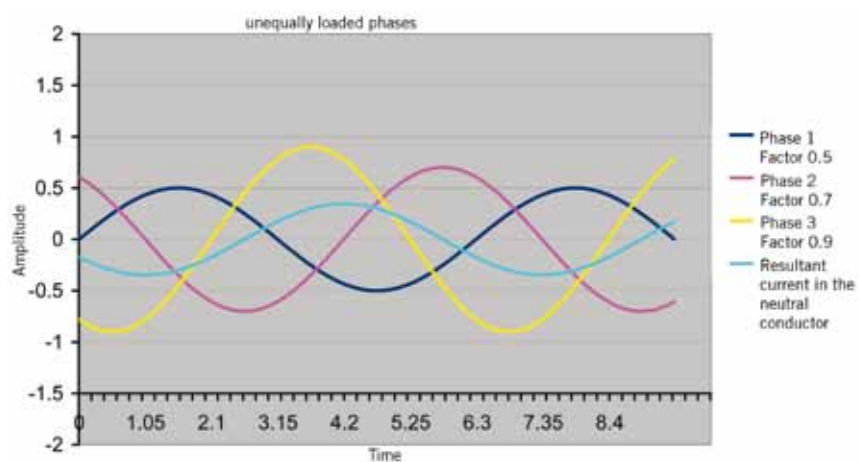

For a symmetrical load (each phase the same as the load) the currents are cancelled out, and no current subsequently flows in the neutral conductor either. If the individual phases have different loads (different resistances, due to heavier inductive or capacitive loading of different phasings), the currents no longer balance out, a resulting current remains, and this runs in the neutral conductor back to the power source.

Due to the basic principles of physics and as can be seen from the vector diagram if one or two phases fail and only the remaining one is loaded, this then results in the most extreme asymmetry.

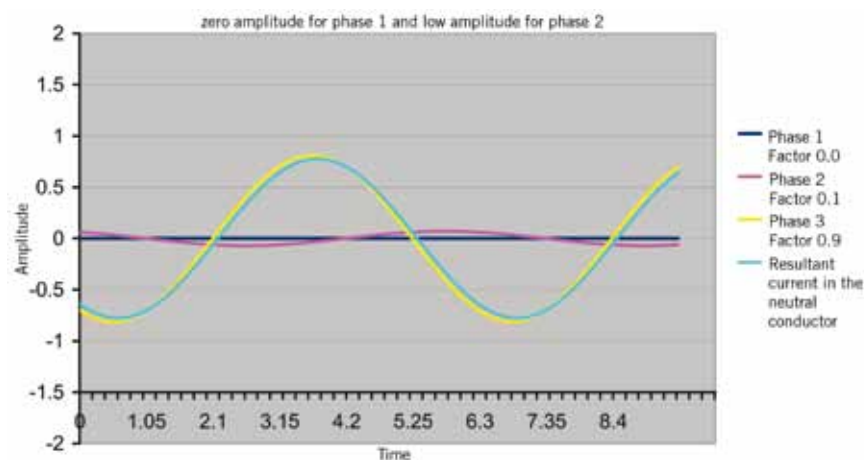


Even in this case, however, it is easy to see (and mathematically deducible) that the maximum neutral current cannot exceed the phase current. (=> basic principle of dimensioning – conductor cross-section for neutral conductor is the same as for phase conductor).

## Periodic but non-sinusoidal load

For most electrical devices, especially in office equipment (computers, printers, etc.), electronically regulated power supplies are often used.



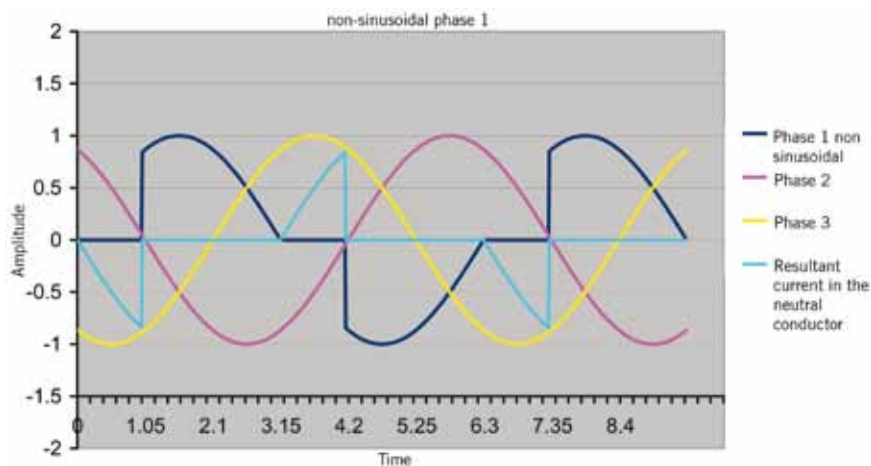

Due to their mode of operation, these devices create non-sinusoidal loads in the electric circuits. The individual phases are therefore not only different in the sizes and phasings of the current, the shape of the flowing current is no longer sinusoidal either.

**Result** The individual phase currents can no longer cancel each other out, and a neutral current flows.

In order to be able to calculate the conditions, we have to go back to basic mathematical principles.



The following is applicable as mathematically proven: Each periodic oscillation can be composed as a result of sinusoidal oscillations with different frequencies and amplitudes (Fourier).

If the half periods are symmetrical mirror images (+ and – parts are equal), only an odd plural number of fundamental oscillations occur:

$$Y(t) = A_1 \sin(\omega t) + A_3 \sin(3\omega t) + A_5 \sin(5\omega t) + A_7 \sin(7\omega t) \dots$$


Fundamental wave

Harmonics

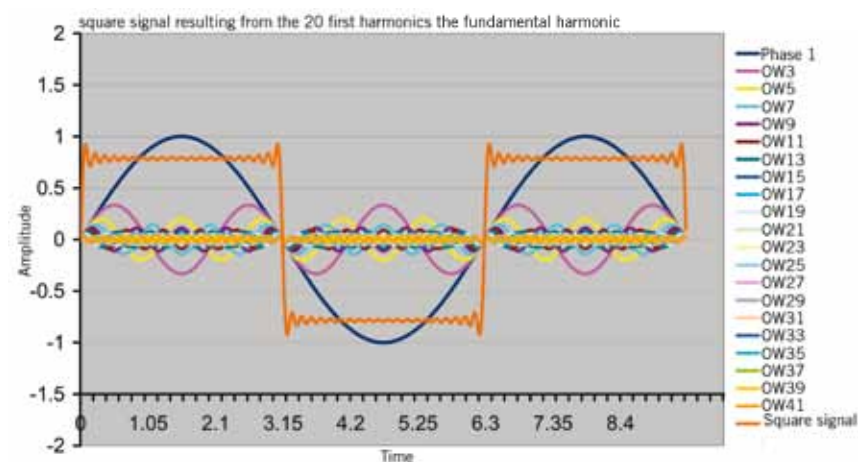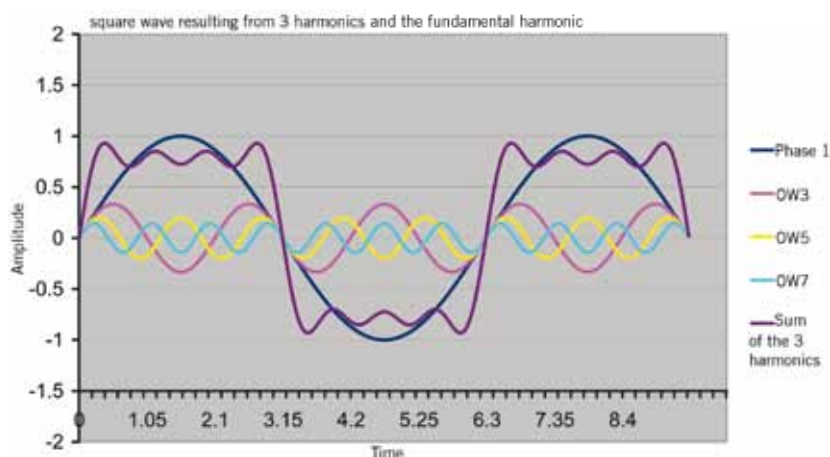

If the fundamental waves have a 1/3 phase shift, they cancel each other out. However, the third harmonics (period length 1/3 of the fundamental waves), despite the phase shift of the fundamental wave, have the same phase as the other third harmonics.

**Result** The fundamental waves have an effect of mutual attenuation on each other, but the 3rd harmonics fall into the same phasing and are added together.

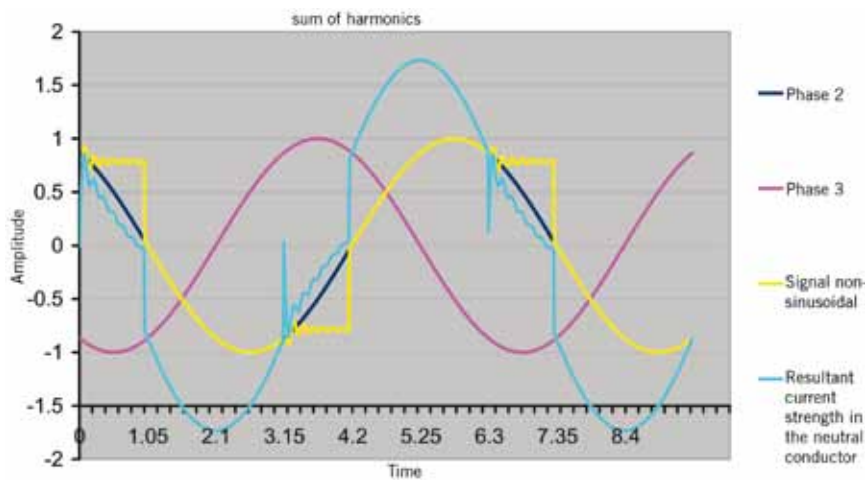


Regardless of the fundamental waves and possible conditions that may exist in practice, without calculations and measurements, you can jump to the wrong conclusion that the neutral conductor may be overloaded.

In practice, you have to analyse actual conditions using basic mathematical principles. If there is a rise in temperature, the effective total current is always a definitive factor. In the pole conductors, this comprises the fundamental wave and the sum of the odd harmonics.

$$I_{\text{eff}} = I_{\text{eff}} 50\text{Hz} + I_{\text{eff}} 150\text{ Hz} + I_{\text{eff}} 250\text{ Hz} + I_{\text{eff}} 350\text{ Hz} + \dots$$


In the neutral conductors, the only flowing elements that strengthen are the 3rd and 9th harmonics. The fundamental wave and the other harmonics have an effect of mutual attenuation on each other.

$$I_{\text{eff}} N = 3 \times I_{\text{eff}} 150\text{ Hz} + 3 \times I_{\text{eff}} 450\text{ Hz} + \dots$$

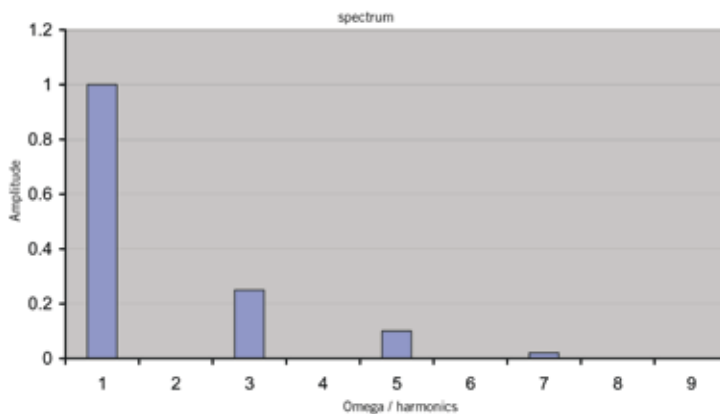

Numerous tests have proven that even under extreme conditions, the effective value of the total neutral current cannot reach the value of a phase current.

(see „Neutralleiterströme / Elektrotechnik“ chapter 9 section 2 by Arnold / Lovack).

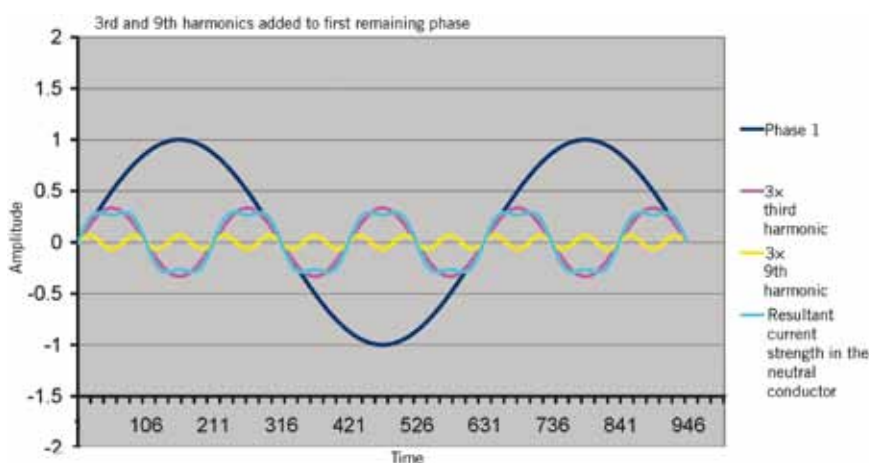

## Note

Neutral currents are produced regardless of the cable type used (round or flat cable).

Even under selected adverse conditions, the neutral currents (especially the sum of the harmonics) can in practice not exceed the loading of the pole conductor. As a result of the greater capacity of flat cables due to the larger surface area for the same conductor cross-sections, flat cables can withstand operational loading with very little increase in temperature.





Flat cables 1.5 - 16 mm<sup>2</sup>

# Cabling Systems

# Woertz data 2x1.5 mm<sup>2</sup>

An exceptional bus flat cable which allows to perform various functions in the field of building automation.



- Cable end piece  
No. 49732

- Clamp for screwing on  
No. 49693

- Junction box with micro-terminal  
No. 49722

- branching box for KNX with socket 2-pole  
No. 49720

- Connector KNX 2-pole  
No. 49740

- Pre-wired connectors  
No. 49740/1M - *different lengths on request*





## Where are these flat cables used?

- In the field of building automation, to connect intelligent devices such as actuators or sensors via bus.
- Specific use with KNX, DALI, LON etc.



# Woertz data 2×1.5 mm<sup>2</sup>

## Flat cable bus 2×1.5 mm<sup>2</sup>

PVC		halogen-free	
No.	Eldas-No.	No.	Eldas-No.
  <b>49949</b>	113 397 300	 <b>49948</b>	113 397 307
 <b>49949/SM*</b>	113 397 309		
* on request		more colours on request	

### Technical data



Dimension	mm	11×6	11×6
Weight	g/m	90	86
Fire load	kWh/m	0.48	0.44
No. of leads x cross-section	mm <sup>2</sup>	2×1.5	2×1.5
Cu weight	kg/km		

### Bus part



Copper conductors		tinned	tinned
Insulation of the leads		polyethylene	polyethylene
Colour of the leads		neutral	neutral
Shield		double shield of aluminium	double shield of aluminium
Coat insulation		PVC	flame retardant polyolefin
Cross-section	mm <sup>2</sup>	1.5	1.5
Test voltage	kV / Hz	4 / 50	4 / 50
Rated voltage	V	50	50
Max. rated current	A	3	3
DC-resistance	Ω/km	13.7	13.7
Max. operating temperature	°C	-15 to 70	-15 to 70
Min. Installation temperature	°C	+5	+5
Capacitance	pF/m	70	70
Attenuation at 1Hz	dB/100m	nom. 1.2	nom. 1.2
Charact. impedance at 1MHz	Ω	nom. 75	nom. 75
Cu weight	kg/km	29	29

## Woertz data 2×1.5 mm<sup>2</sup>

### Branching boxes to flat cable No. 49948 and No. 49949

for KNX with socket 2-pole		Technical data		bus part	
<div>No.</div> <div>49720</div> <div></div>	<div>Eldas-No.</div> <div>150 706 137</div>	LxWxH mm	47x18x23.5	Cross-section mm²	1.5
		Weight g	12	Rated voltage V	50
		Fire load kWh	0.08	Max. rated current A	3
		socket	type BST14i2	Tightening torque Nm	1.0
			code KNX	screwdriver No.	3
		Plastic parts	halogen-free		
		Metal parts	corrosion-resistant		
		Packing unit pce.	50		
Degree of protection		IP20	Pre-wired connectors see page 82		
for bus with socket 2-pole		Technical data		bus part	
<div>No.</div> <div>49721</div> <div></div>	<div>Eldas-No.</div> <div>150 706 237</div>	LxWxH mm	47x18x23.5	Cross-section mm²	1.5
		Weight g	12	Rated voltage V	50
		Fire load kWh	0.08	Max. rated current A	3
		socket	type BST14i3	Tightening torque Nm	1.0
			code 3	screwdriver No.	3
		Plastic parts	halogen-free		
		Metal parts	corrosion-resistant		
		Packing unit pce.	50		
Degree of protection		IP20	Pre-wired connectors see page 82		
for bus with socket 2-pole		Technical data		bus part	
<div>No.</div> <div>49727</div> <div></div>		LxWxH mm	47x18x23.5	Cross-section mm²	1.5
		Weight g	12	Rated voltage V	50
		Fire load kWh	0.08	Max. rated current A	3
		socket	code Woertz	Tightening torque Nm	1.0
		Plastic parts	halogen-free	screwdriver No.	3
		Metal parts	corrosion-resistant		
		Packing unit pce.	50		
		Degree of protection		IP20	Pre-wired connectors see page 82

### Junction box to flat cable No. 49948 and No. 49949

with micro-terminal		Technical data		bus part	
No.	Eldas-No.	LxWxH mm	37x18x23.5	Cross-section mm <sup>2</sup>	1.5
49722	150 706 337	Weight g	12	Rated voltage V	50
		Fire load kWh	0.08	Max. rated current A	3
		Plastic parts	halogen-free	Tightening torque Nm	1.0
		Metal parts	corrosion-resistant	screwdriver No.	3
		Packing unit pce.	50		
		Degree of protection	IP20		
					

## Accessories

Cable end piece		Technical data		
<b>No.</b> <b>49732</b>	Eldas-No. 150 901 117	LxWxH mm Weight g Fire load kWh Packing unit pce.	20x14x9 1.5 0.02 200	polycarbonate, halogen-free; silicone gel  Note: Cut neatly both ends of the cable before mounting the end pieces. No need to strip the cable. Cable end piece may only be mounted once.
				
Clamp for screwing on		Technical data		
<b>No.</b> <b>49693</b>	Eldas-No. 120 008 607	LxWxH mm Weight g Fire load kWh Packing unit pce.	31x10x8.5 1.2 0.01 100	polyamide 6.6, halogen-free, grey
				
Shears		Technical data		
<b>No.</b> <b>49930</b>	Eldas-No. 983 045 007	Packing unit pce.	1	For cutting neatly and easily every type of flat cables (max. width 32mm).  with sliding anvil, Teflon coated blades
				
Insulating tape		Technical data		
<b>No.</b> <b>49960</b>	Eldas-No. 171 013 004	LxWxH mm Dielectric strength max. kV/mm Temperature max. °C Packing unit pce.	102x100x2.3 23 +70 10	To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.  Weatherproof, self-fusing
				

# Woertz® multibus 4×1.5 mm<sup>2</sup>

Without the cable insulation having to be stripped!



- Cable end piece IP68  
No. 48510/06

- Clamp for screwing on  
No. 49661

- Junction box - specially adapted to MP bus products  
No. 49670


## Where are these flat cables used?

- for low voltage installations (rugged version for high mechanical strains).
- as a complement to the flat cable system ecobus combi.
- for heating, ventilating and air-conditioning processes (HVAC).
- for basic controls in buildings.
- specially adapted to MP bus products of the company Belimo.
- for SMI BT applications



# Woertz multibus 4x1.5 mm²

Flachkabel 4x1.5 mm²




halogen-free	
No.	Eldas-No.
■ 49651	113 277 509

more colours on request

Technical data		
Dimension	mm	16x4.6
Weight	g/m	125
Fire load	kWh/m	0.37
No. of leads x cross-section	mm²	4x1.5
High current part		
Copper conductors		tinned, highly flexible
Insulation of the leads		polyethylene
Colour of the leads		black, red, white, brown
Cross-section	mm²	1.5
Coat insulation		flame retardant polyethylene
Test voltage	kV / Hz	4 / 50
Rated voltage	V	300
DC-resistance	Ω/km	13
Max. operating temperature	°C	-15 to +90
Min. Installation temperature	°C	+5
Cu weight	kg/km	58

# Woertz multibus 4x1.5 mm<sup>2</sup>


Examples of application: Belimo - Multitherm

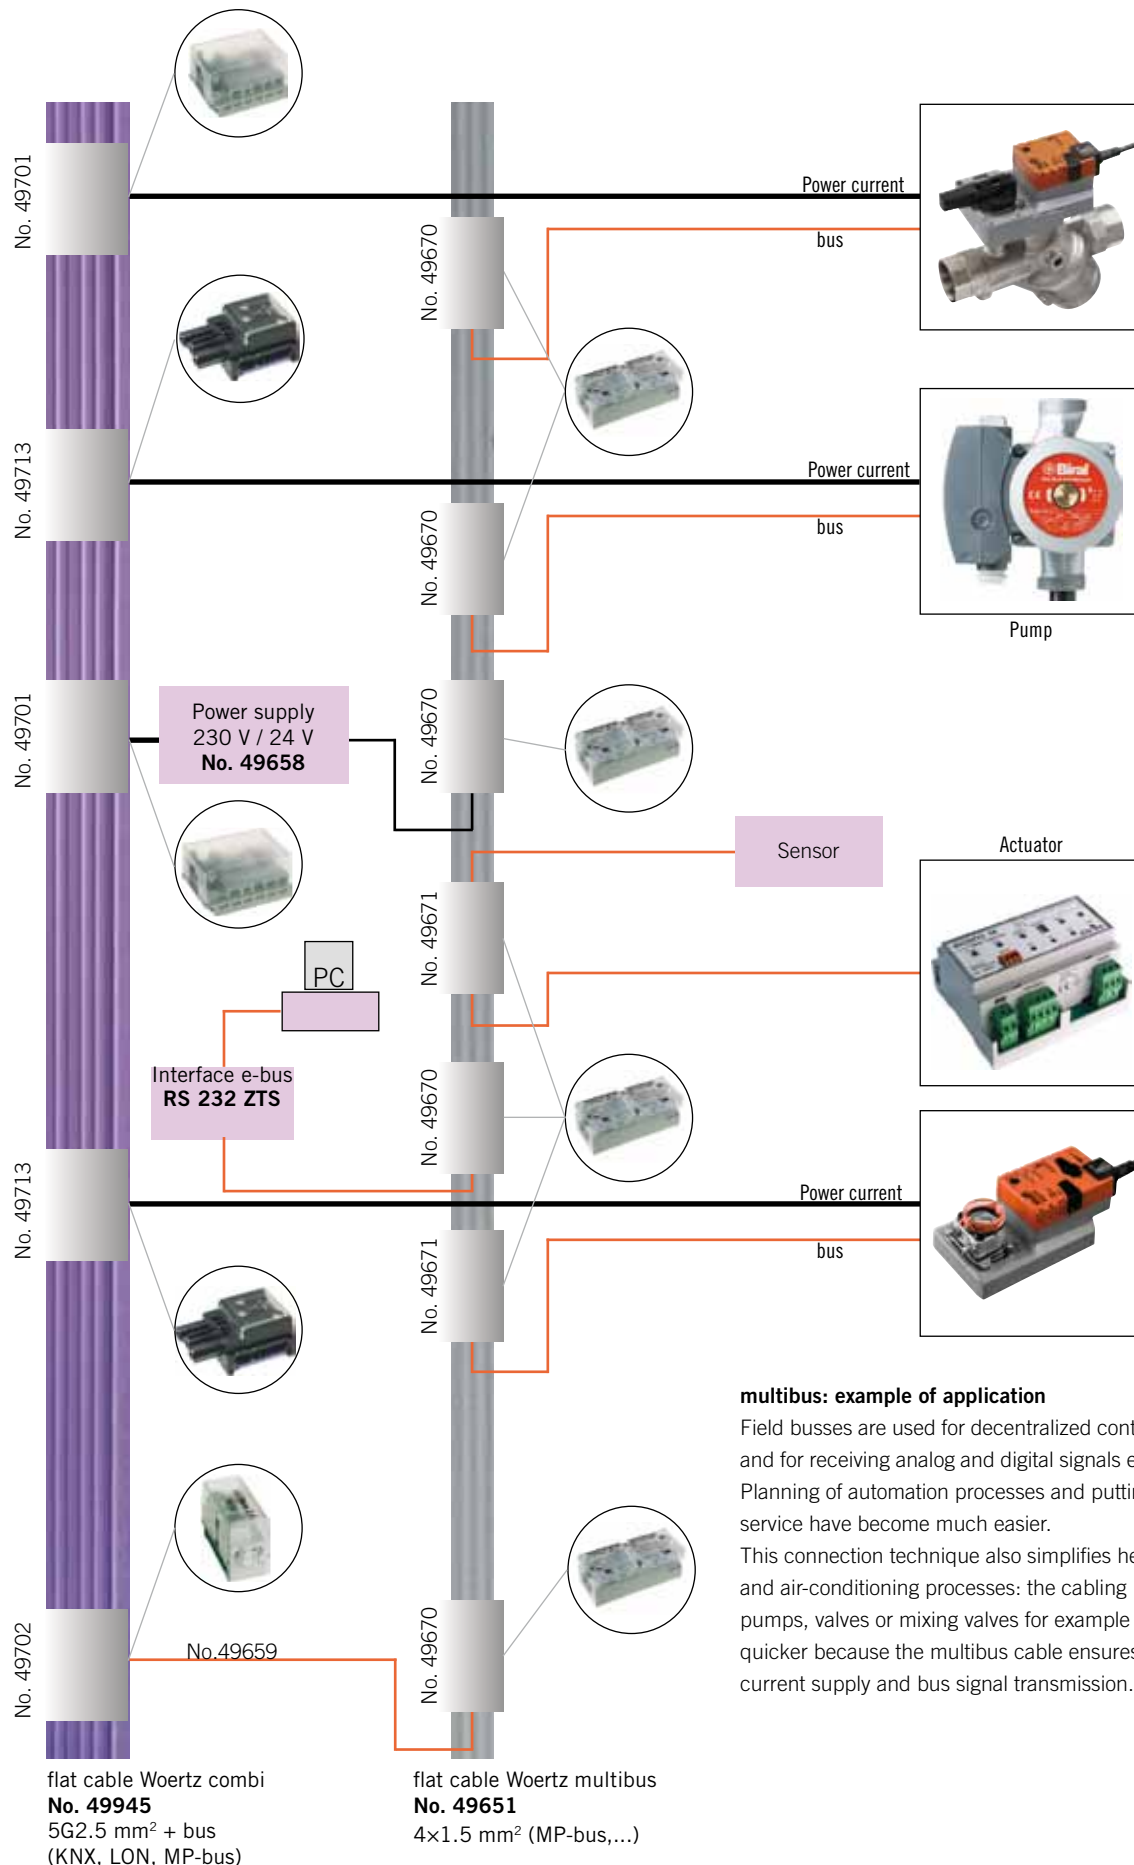


## Mounting procedure of branching box No. 49670 / 49671




Position the base part of the box and screw it on to its support if required.



Position the asymmetric multi-bus flat cable in the right position.




Cut the outgoing round cable to the desired length and strip coating. Introduce the leads in the provided partitions (the conductors don't have to be stripped of insulation).



Fold back the cover - Lock.



Tighten up the screws of the cover.



Snap together the upper part and the base.



Fold down the upper part.



Tighten up the fastening screws.

**Note:**  
if necessary, the connecting boxes may be marked by means of self-adhesive labels.

The mounting procedure may also occur in a changed order: 1, 2, 6, 7, 8, 3, 4, 5.

### Possibility of pre-wiring: Service to our customers.

On request the boxes may be provided in advance with round outgoing cables.

Boxes for pumps, valves or mixing valves for HVAC installations for instance may be prewired with outgoing round cables in our workshops (fig. 3-5). On the building site the prewired boxes have only to be positioned on the flat cable. The electrical contact will be established within a few seconds by means of an electric screw-driver.





Woertz multibus 4x1.5 mm<sup>2</sup>

Junction boxes with 3 or 4 contacts to flat cable No. 49651

<b>Junction box</b>		<b>Technical data</b>		
No.	Eldas No.	LxWxH mm	76x32x27	For 2 round cables 4x0.75 mm² flex with with 1 connector and 3 contacts for supply and branching. specially adapted to MP bus devices from the company Belimo.
49670	150 701 317	Weight g	55.5	
		Fire load kWh	0.4	
		Rated voltage V	48	
		Max. rated current A	3.5	
		Plastic parts	halogen-free	
		Metal parts	corrosion-resistant	
		Packing unit pce.	25	
		Degree of protection	IP20	
49670/1 prewired 1m round cable 49670/2 prewired 2m round cable				
<b>Junction box</b>		<b>Technical data</b>		
No.	Eldas No.	LxWxH mm	76x32x27	For 2 round cables 4x0.75mm2 flex with 4 contacts for supply and branching
49671	150 701 347	Weight g	55.5	
		Fire load kWh	0.4	
		Rated voltage V	48	
		Max. rated current A	3.5	
		Plastic parts	halogen-free	
		Metal parts	corrosion-resistant	
		Packing unit pce.	25	
		Degree of protection	IP20	
<b>Junction box</b>		<b>Technical data</b>		
No.	Eldas No.	Weight g	46.3	for the supply with rigid strands or strands with a cross section different from 0.75mm2
9052	150 706 037	Plastic parts	halogen-free	
		Metal parts	corrosion-resistant	
		Degree of protection	IP20	

## Accessories

<b>Power supply and coupler</b>		<b>Technical data</b>		
No. <b>49658</b>	Eldas No. 960 905 107	Power supply 230V/24VDC consisting of 1 power supply unit, 1 junction box No. 49670, 1 junction box No. 49701		
				
<b>Cable end piece</b>		<b>Technical data</b>		
No. <b>48510/06</b>	Eldas No. 120 900 507	LxWxH mm Weight g Packing unit pce.	40x36x16 10.6 4	of polycarbonate, halogen-free; silicone gel
		Degree of protection	IP68	Note: Cut neatly both ends of the cable before mounting the end pieces. No need to strip the cable. Cable end piece may only be mounted once.

## Accessories

<b>Flexible round cable</b>		<b>Technical data</b>	
<b>No.</b>	Eldas-No.	Diameter mm	6.8 mm
<b>49665</b>	113 271 047	Fire load kWh/m	0.02
		Temperature range	-30°C to +90°C
		Packing unit m	500
<b>Stopper</b>		<b>Technical data</b>	
<b>No.</b>	Eldas-No.	Weight g	0.5
<b>49675</b>	120 660 007	Packing unit pce.	25
		To obturate unused cable outlets. 1 stopper delivered with connecting boxes No. 49670 and 49671.	
<b>Clamp</b>		<b>Technical data</b>	
<b>No.</b>	Eldas-No.	LxWxH mm	31x10x7
<b>49661</b>	120 008 407	Weight g	6.0
		Fire load kWh	0.01
		Packing unit pce.	100
<b>Clamp</b>		<b>Technical data</b>	
<b>No.</b>	Eldas-No.	LxWxH mm	70x10x10
<b>49664</b>	120 008 507	Weight g	2.0
		Fire load kWh	0.02
		Packing unit pce.	50
<b>Shears</b>		<b>Technical data</b>	
<b>No.</b>	Eldas-No.	Weight g	223
<b>49930</b>	983 045 007	Packing unit pce.	1
		For cutting neatly and easily every type of flat cables (max. width 32mm).  With sliding anvil. Teflon coated blades.	
<b>Insulating tape</b>		<b>Technical data</b>	
<b>No.</b>	Eldas-No.	Dimension mmxm	50x1
<b>49632</b>	150 901 147	Weight g	50.1
		Dielectric strength max. kV/mm	18
		Temperature max. °C	+70
		Packing unit m	1
		To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.  Weatherproof, self-fusing.	

# Woertz® 3G2.5 mm<sup>2</sup> and Woertz® 3G4 mm<sup>2</sup>

The efficiency of this system is related to its great flexibility and extension facility, anywhere, anytime.

- Cable end piece IP68  
No. 48510/03  
of polycarbonate, halogen-free; silicone gel

- Clamp  
No. 49693

- Branching box  
No. 49695

- Junction box  
No. 49687

## Where are these flat cables used?

- in offices where the number of computers is liable to be increased and the furniture to be displaced.
- in workshops and laboratories equipped with small-sized machines and devices. The flat cables are then laid into floor-, ceiling- or wall ducts
- in shops and show windows where the connecting points may often change
- for the installation of prefabricated houses
- in hanging ceilings for the supply of lamps.

Flat cable enables installations to be completed easily with further connections.

## Woertz 3G2.5 mm<sup>2</sup>

### Flat cable 3G2.5 mm<sup>2</sup>

PVC		halogen-free
No.	Eldas-No.	No. Eldas-No.
	<b>49685</b> <b>49685/SM*</b>	<b>49686</b> <b>49686RT</b> <b>SC49686RT</b> <b>49686/SM*</b>
	113 297 807	113 307 807
L+N+PE	* on request	more colours on request

#### Technical data

Dimensions	mm	16.5×6	16.5×6
Weight	g/m	185	185
Fire load	kWh/m	0.583	1.02
No. of leads x cross-section	mm <sup>2</sup>	3×2.5	3×2.5

#### High current part

Copper conductors	tinned, highly flexible	tinned, highly flexible
Insulation of the leads	PVC	flame retardant polyethylene
Colour of the leads	brown, green/yellow, blue	brown, green/yellow, blue
Cross-section	mm <sup>2</sup> 2.5	2.5
Coat insulation	PVC Oil resistant	flame retardant polyethylene
Test voltage	kV / Hz 4 / 50	4 / 50
Rated voltage	kV 0.6/1	0.6/1
DC-resistance	Ω/km 8.21	8.21
Max. operating temperature	°C -15 to +90	-15 to +90
Min. Installation temperature	°C +5	+5
Cu weight	kg/km 72	72

## Woertz 3G4 mm<sup>2</sup>

### Flat cable 3G4 mm<sup>2</sup>

PVC		halogen-free
No.	Eldas-No.	No. Eldas-No.
		<b>49646</b>
L+N+PE		more colours on request

#### Technical data

Dimensions	mm	16.5×6
Weight	g/m	224
Fire load	kWh/m	0.95
No. of leads x cross-section	mm <sup>2</sup>	3×4

#### High current part

Copper conductors	tinned, highly flexible	tinned, highly flexible
Insulation of the leads	flame retardant polyethylene	flame retardant polyethylene
Colour of the leads	brown, green/yellow, blue	brown, green/yellow, blue
Cross-section	mm <sup>2</sup> 3×4	3×4
Coat insulation	flame retardant polyethylene	flame retardant polyethylene
Test voltage	kV / Hz 4 / 50	4 / 50
Rated voltage	kV 0.6/1	0.6/1
DC-resistance	Ω/km 5.09	5.09
Max. operating temperature	°C -15 to +90	-15 to +90
Min. Installation temperature	°C +5	+5
Cu weight	kg/km 116	116



## Woertz 3G2.5 mm<sup>2</sup> and Woertz 3G4 mm<sup>2</sup>


Example of application: SCHAKO EasyBus



Compatible with:  
KNX  
LON  
BacNet  
ModBus etc

 **EasyBus**



  
EasyBus Master

### Easy:

- just one cable for both control and supply
- max. cable length 1000m
- 128 participants (CHP, VAV, etc.)
- simplified connection

### Safe:


- no faulty wiring
- no connection loss
- arbitrary topology
- easy maintenance
- low fire load

### Advantageous

- installing, planning of automation processes and putting them into service have become much easier
- no sub-distribution boxes: extremely space-saving
- compatible with standard control systems
- no special tools required



Woertz 3x2.5mm<sup>2</sup>  
No. SC49686RT

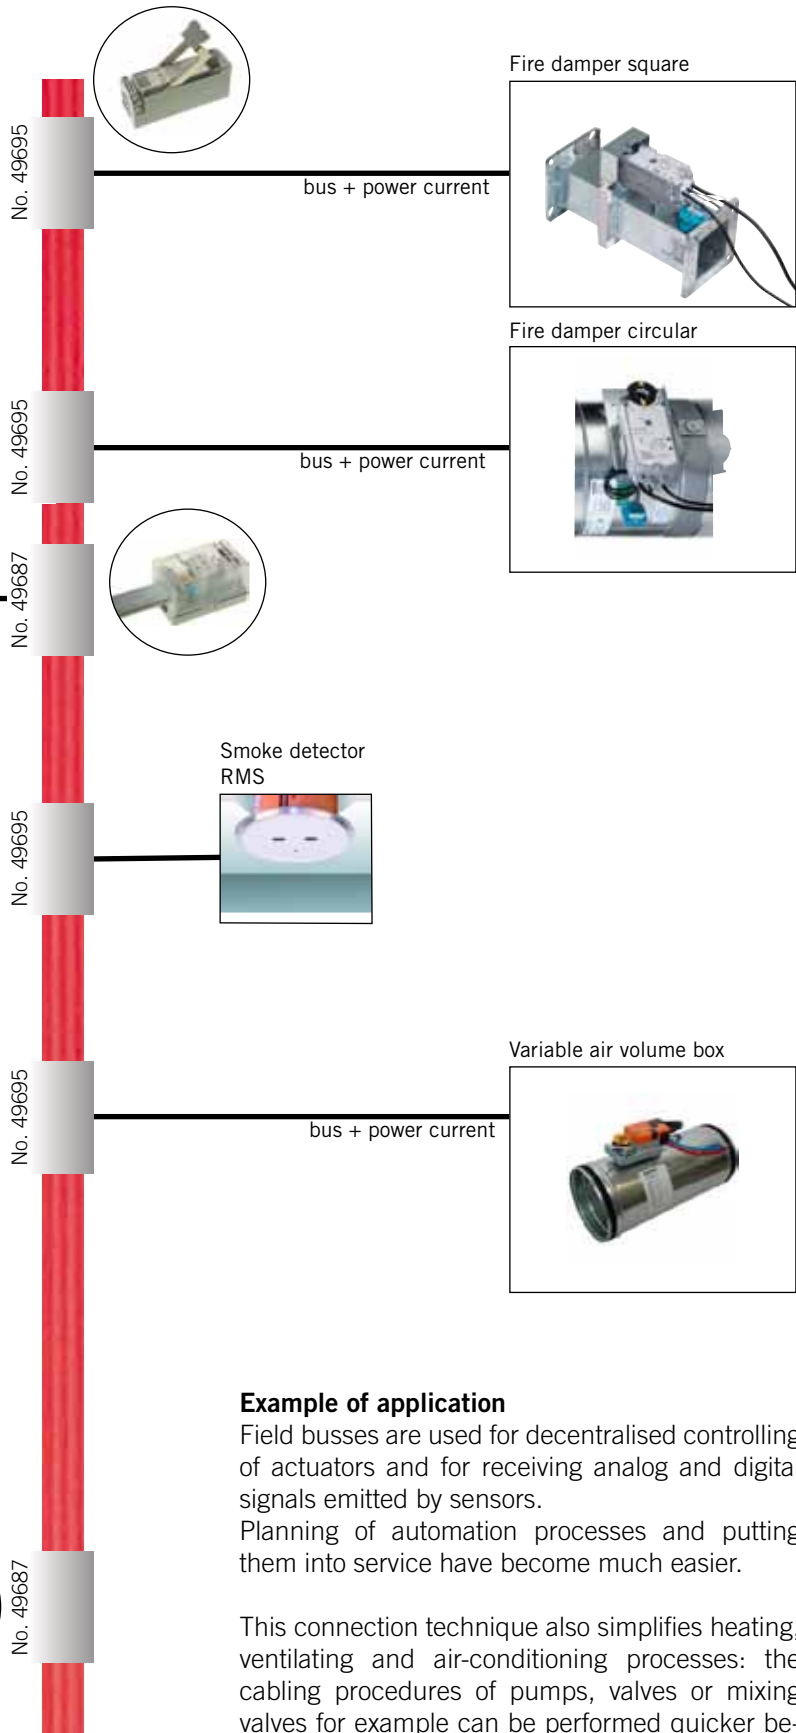

### Example of application

Field busses are used for decentralised controlling of actuators and for receiving analog and digital signals emitted by sensors.

Planning of automation processes and putting them into service have become much easier.




This connection technique also simplifies heating, ventilating and air-conditioning processes: the cabling procedures of pumps, valves or mixing valves for example can be performed quicker because just one cable ensures both power current supply and bus signal transmission.

More information under  
<http://www.easybus-system.ch>



## Woertz 3G2.5 mm<sup>2</sup> and Woertz 3G4 mm<sup>2</sup>

Junction box and connector to flat cable No. 49685, 49686 and 49646


Connecting box		Technical data			
<div>No.</div> <div>49687</div> <div></div>	<div>No. Eldas</div> <div>150 701 407</div>	L×W×H mm	55×33×33	for supply and branching no need to strip the insulation	
		Fire load kWh	0.24	Plastic parts: halogen-free	
		Connecting capacity Ø in mm	3.75	Metal parts: corrosion-resistant	
		Rated voltage V	250		
		Max. rated current A	16		
		Weight g	45		
		Packing unit pce.	10	Tightening torque Nm	0.7
		Degree of protection	IP20	screwdriver No.	1
Branching box		Technical data			
<div>No.</div> <div>49695</div> <div></div>	<div>No. Eldas</div> <div>150 701 457</div>	L×W×H mm	90×30×34	for branching no need to strip the insulation	
		Fire load kWh	0.36	Plastic parts: halogen-free	
		Connecting capacity Ø in mm	3.75	Metal parts: corrosion-resistant	
		Rated voltage V	250		
		Max. rated current A	16		
		Weight g	85	Tightening torque Nm	0.7
		Packing unit pce.	10	screwdriver No.	1
		Degree of protection	IP20	<i>further lengths on request</i>	
Pre-wired connector		Technical data			
<div>No.</div> <div>49696F</div> <div></div>		L×W×H mm	260×30×34	Pre-wired connector	
		Weight g	200	No. 49695	
		Packing unit pce.	1	with 10 cm round cable 3G1.5 mm² and Kupplung 3-poles, type GST 18i3 F B2 Z	
				<i>Pre-wired connectors see page 82</i>	
				<i>further lengths on request</i>	

### Accessories

End piece		Technical data		
<div>No. 48510/03</div> <div></div>	<div>No. Eldas 120 900 307</div>	LxWxH mm	40x25x15	<div>of polycarbonate, halogen-free; silicone gel</div> <div>Note: Cut neatly both ends of the cable before mounting the end pieces. No need to strip the cable. Cable end piece may only be mounted once.</div>
		Weight g	9.5	
		Fire load kWh	n.a.	
		Packing unit pce.	8	
		Degree of protection	IP68	
Clamp for screw fixing		Technical data		
<div>No. 49693</div> <div></div>	<div>No. Eldas 120 008 607</div>	LxWxH mm	31x10x8.5	<div>of polyamide 6.6, halogen-free</div>
		Weight g	0.95	
		Fire load kWh	0.01	
		Packing unit pce.	100	
<div>No. 49462</div> <div></div>	<div>No. Eldas</div>	LxWxH mm	10x45x1	<div>Stainless steel V4A</div>
		Weight g	3.8	
		Packing unit pce.	100	
Shears		Technical data		
<div>No. 49930</div> <div></div>	<div>No. Eldas 983 045 007</div>	Weight g	223	<div>For cutting neatly and easily every type of flat cables</div> <div>With sliding anvil. Teflon coated blades.</div>
		Packing unit pce.	1	
Insulating tape		Technical data		
<div>No. 49960</div> <div></div>	<div>No. Eldas 171 013 004</div>	Dimension mm	102x100x2.3	<div>To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.</div> <div>Weatherproof, self-fusing</div>
		Weight g	33	
		Dielectric strength max. kV/mm	23	
		Temperature max. °C	+70	
		Packing unit pce.	10	

# Woertz® Technofil 5G1.5 mm<sup>2</sup> and Woertz® Technofil 5G2.5 mm<sup>2</sup>

Max. 10A per connection. Only to be used in Switzerland!

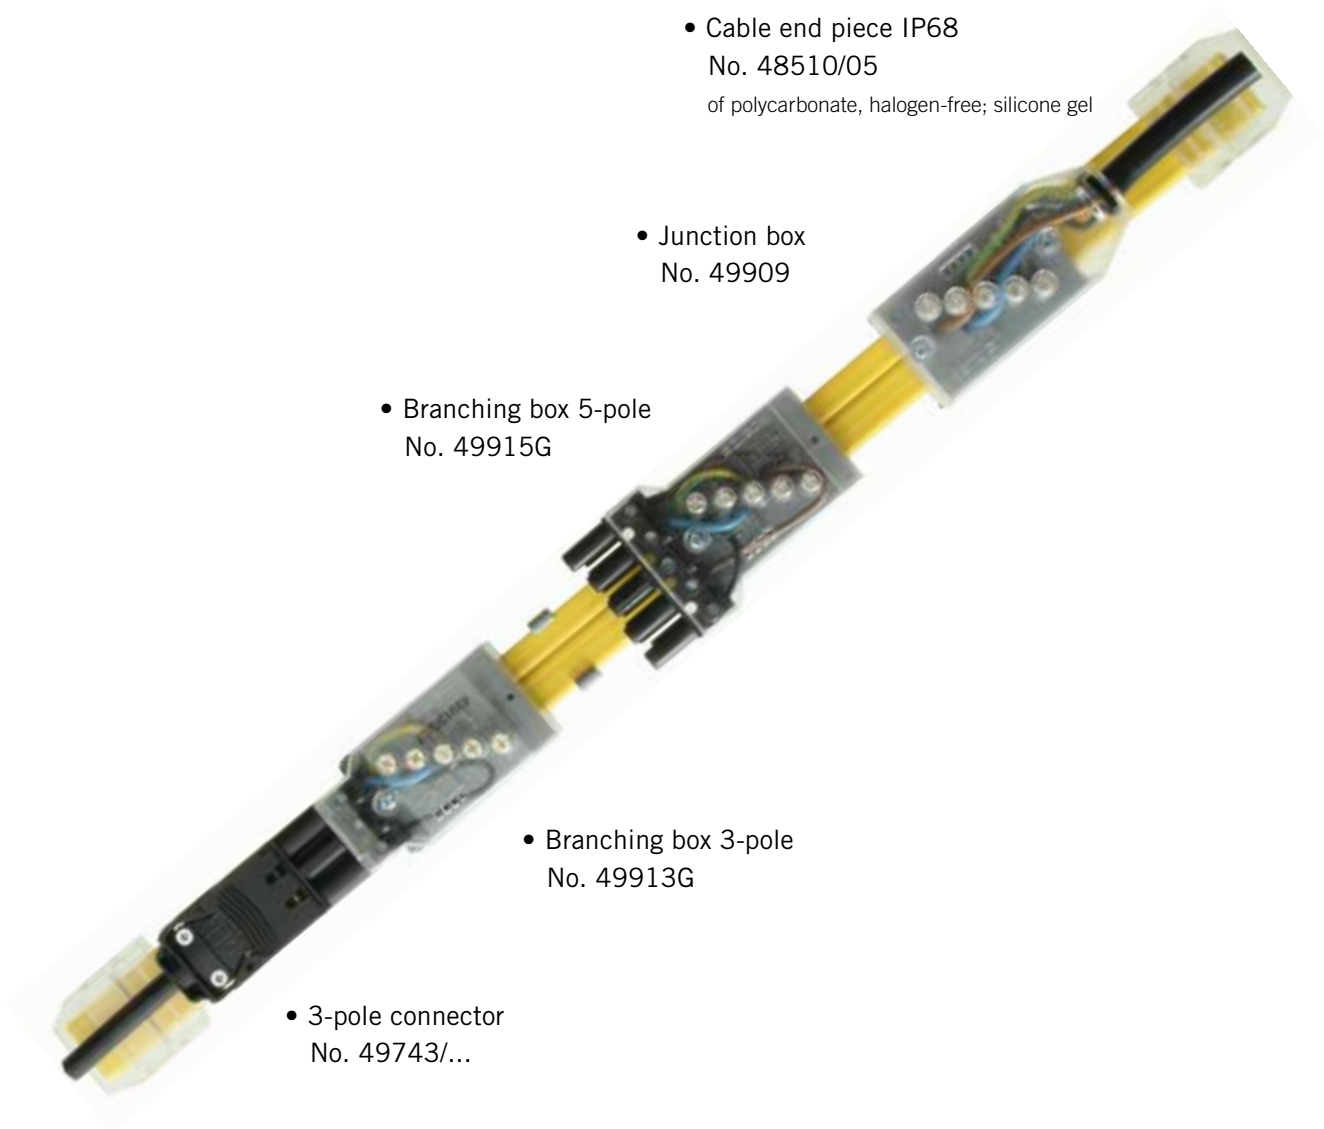

## Where are these flat cables used?


The wide range of flat cable boxes enables numerous connecting problems on receiver circuits to be solved.

Following connectors may be combined thus:

- alternately single-pole or multi-pole receivers
- receivers may be assigned to different switching groups (economy circuits)
- alternate distribution of single-pole receivers among the three phase conductors (load compensation)
- assignation of selected receivers such as emergency light, cash box etc... to emergency supply or safety supply
- permanent connections or plug-type connections (service works become easier)

## Woertz Technofil 5G1.5 mm<sup>2</sup>

Flat cable 5G1.5 mm<sup>2</sup>

PVC		halogen-free	
No.	Eldas-No.	No.	Eldas-No.
	9040		113 307 609
	9040/SM*		113 307 619
3 L+N+PE	* on request		

### Technical data


Dimensions	mm	23x6
Weight	g/m	235
Fire load	kWh/m	0.92
No. of leads x cross-section	mm <sup>2</sup>	5x1.5

### High current part

Copper conductors	bare, highly flexible
Insulation of the leads	PVC
Colour of the leads	brown, blue, green/yellow, grey, black
Cross-section	mm <sup>2</sup> 1.5
Coat insulation	PVC
Test voltage	kV 2.5
Rated voltage	kV 0.6/1
DC-resistance	Ω/km 13.7
Max. operating temperature	°C -15 to +70
Min. installation temperature	°C +5
Cu weight	kg/km 72

## Woertz Technofil 5G2.5 mm<sup>2</sup>

Flat cable 5G2.5 mm<sup>2</sup>

PVC		halogen-free	
No.	Eldas-No.	No.	Eldas-No.
	9055	49900	113 298 007
	9055/SM*	49900/SM*	113 298 017
3 L+N+PE	* on request		

### Technical data


Dimensions	mm	23x6	23x6
Weight	g/m	275	277
Fire load	kWh/m	0.87	1.37
No. of leads x cross-section	mm <sup>2</sup>	5x2.5	5x2.5

### High current part

Copper conductors	tinned, highly flexible	tinned, highly flexible
Insulation of the leads	PVC	flame retardant polyethylene
Colour of the leads	brown, blue, green/yellow, grey, black	brown, blue, green/yellow, black, grey
Cross-section	mm <sup>2</sup> 2.5	2.5
Coat insulation	PVC	flame retardant polyethylene
Test voltage	kV 2.5	2.5
Rated voltage	kV 0.6/1	0.6/1
DC-resistance	Ω/km 8.21	8.21
Max. operating temperature	°C -15 to +70	-15 to +90
Min. installation temperature	°C +5	+5
Cu weight	kg/km 120	120

# Woertz Technofil 5G1.5 mm<sup>2</sup> and 5G2.5 mm<sup>2</sup>

Supply and connecting boxes and boxes for several connection points to flat cable No. 9040, 9055 and 49900

Junction box		Technical data					
<div>No.</div> <div>49901</div> <div></div>	<div>Eldas-No.</div> <div>150 708 037</div>	LxWxH mm	95x40x27	for the connection of 2 cables or supply at the end of the cable			
		Weight g	87				
		Fire load kWh	0.33				
		Connecting capacity H x W mm	6x3.2				
		Rated voltage V	500				
		Max. rated current max. A	16				
		Packing unit pce.	25				
		Degree of protection	IP20				
				Connectivity at end of cable			
							
		Plastic parts: halogen-free					
		Metal parts: corrosion-resistant					
		Tightening torque Nm	0.7				
		screwdriver No.	1				
Junction box		Technical data					
<div>No.</div> <div>9052</div> <div></div>	<div>Eldas-No.</div> <div>150 706 037</div>	LxWxH mm	70x40x18	for the connection of 2 cables or supply at the end of the cable			
		Weight g	47				
		Fire load kWh	0.11				
		Connecting capacity Ø	3.30	Plastic parts: halogen-free			
		Rated voltage V	500	Metal parts: corrosion-resistant			
		Max. rated current max. A	16				
		Packing unit pce.	50				
		Degree of protection	IP20				
				Tightening torque Nm	0.7		
				screwdriver No.	1		
Junction box		Technical data					
<div>No.</div> <div>9045</div> <div></div>	<div>Eldas-No.</div> <div>150 700 037</div>	LxWxH mm	61x38x44.5	Plastic parts: halogen-free			
		Weight g	60	Metal parts: corrosion-resistant			
		Fire load kWh	0.30				
		Cable feed diameter	1x Ø 10	Tightening torque Nm			
		Connecting capacity Ø	3.75	0.7			
		Rated voltage V	500	Screwdriver No.			
		Max. rated current max. A	10	1			
		Packing unit pce.	50	(for pointed and clamping screws)			
		Degree of protection	IP20				
		Junction box		Technical data			
<div>No.</div> <div>9047</div> <div></div>	<div>Eldas-No.</div> <div>150 702 037</div>	LxWxH mm	61x38x44.5	Plastic parts: halogen-free			
		Weight g	60	Metal parts: corrosion-resistant			
		Fire load kWh	0.30				
		Cable feed diameter	1x Ø 12	Tightening torque Nm			
		Connecting capacity Ø	3.75	0.7			
		Rated voltage V	500	Screwdriver No.			
		Max. rated current max. A	10	1			
		Packing unit pce.	50	(for pointed and clamping screws)			
		Degree of protection	IP20				
		Junction box		Technical data			
<div>No.</div> <div>49905</div> <div></div>	<div>Eldas-No.</div> <div>150 702 137</div>	LxWxH mm	61x38x44.5	Plastic parts: halogen-free			
		Weight g	60	Metal parts: corrosion-resistant			
		Fire load kWh	0.30				
		Cable feed diameter	1x Ø 14.5	Tightening torque Nm			
		Connecting capacity Ø	3.75	0.7			
		Rated voltage V	500	Screwdriver No.			
		Max. rated current max. A	10	1			
		Packing unit pce.	50	(for pointed and clamping screws)			
		Degree of protection	IP20				
		Junction box		Technical data			
<div>No.</div> <div>9046</div> <div></div>	<div>Eldas-No.</div> <div>150 701 037</div>	LxWxH mm	60x38x44.5	Plastic parts: halogen-free			
		Weight g	60	Metal parts: corrosion-resistant			
		Fire load kWh	0.31				
		Cable feed diameter	2x Ø 9.5	Tightening torque Nm			
		Connecting capacity Ø	3.75	0.7			
		Rated voltage V	500	Screwdriver No.			
		Max. rated current max. A	10	1			
		Packing unit pce.	25	(for pointed and clamping screws)			
		Degree of protection	IP20				

# Woertz Technofil 5G1.5 mm<sup>2</sup> and 5G2.5 mm<sup>2</sup>

Flat cable boxes for several connection points to flat cable No. 9040, 9055 and 49900

Junction box		Technical data			
No. 9053	Eldas-No. 150 707 037		LxWxH mm	60x38x54	Plastic parts: halogen-free Metal parts: corrosion-resistant
			Weight g	60	
			Fire load kWh	0.34	
			Cable feed diameter	3x Ø 8.5	Tightening torque Nm Screwdriver No. (for pointed and clamping screws)
			Connecting capacity Ø	3.75	
			Rated voltage V	500	
			Max. rated current max. A	10	
			Packing unit pce.	50	
			Degree of protection	IP20	
Junction box		Technical data			
No. 49908	Eldas-No. 150 704 337		LxWxH mm	62x38x31	with openings for pointed screw mounting writable with our label tag Art. 35455/6201
			Weight g	57	
			Fire load kWh	0.30	
			Cable feed diameter	3x Ø 10	Plastic parts: halogen-free Metal parts: corrosion-resistant
			Connecting capacity Ø	3.75	
			Rated voltage V	500	
			Max. rated current max. A	10	Tightening torque Nm Screwdriver No. (for pointed and clamping screws)
			Packing unit pce.	50	
			Degree of protection	IP20	
Junction box		Technical data			
No. 49906	Eldas-No. 150 704 237		LxWxH mm	62x38x31	with pointed screw cover
			Weight g	57	
			Fire load kWh	0.30	Plastic parts: halogen-free Metal parts: corrosion-resistant
			Cable feed diameter	3x Ø 10	
			Connecting capacity Ø	3.75	
			Rated voltage V	500	Tightening torque Nm Screwdriver No. (for pointed and clamping screws)
			Max. rated current max. A	10	
			Packing unit pce.	50	
			Degree of protection	IP20	
Junction box		Technical data			
No. 49909	Eldas-No. 150 704 437		LxWxH mm	62x38x31	with openings for pointed screw mounting writable with our label tag Art. 35455/6201
			Weight g	57	
			Fire load kWh	0.30	Plastic parts: halogen-free Metal parts: corrosion-resistant
			Cable feed diameter	3x Ø 12.4	
			Connecting capacity Ø	3.75	
			Rated voltage V	500	Tightening torque Nm Screwdriver No. (for pointed and clamping screws)
			Max. rated current max. A	10	
			Packing unit pce.	50	
			Degree of protection	IP20	
Junction box		Technical data			
No. 9049	Eldas-No. 150 704 037		LxWxH mm	62x38x27	for insulated cable outlets
			Weight g	38	
			Fire load kWh	0.28	Plastic parts: halogen-free Metal parts: corrosion-resistant
			Cross-section for insulated wires max. mm²	1.5	
			Outlets for 2x2 insulated wires on each narrow side		
			Rated voltage V	500	Tightening torque Nm Screwdriver No. (for pointed and clamping screws)
			Max. rated current max. A	10	
			Packing unit pce.	100	
			Degree of protection	IP20	
Junction box		Technical data			
No. 9051	Eldas-No. 150 705 037		LxWxH mm	65x38x20	for insulated cable outlets flat execution
			Weight g	54	
			Fire load kWh	0.27	Plastic parts: halogen-free Metal parts: corrosion-resistant
			Cross-section for insulated wires max. mm²	1.5	
			Outlets for insulated wires on all sides		
			Rated voltage V	500	Tightening torque Nm Screwdriver No. (for pointed and clamping screws)
			Max. rated current max. A	10	
			Packing unit pce.	10	
			Degree of protection	IP20	



# Woertz Technofil 5G1.5 mm<sup>2</sup> and 5G2.5 mm<sup>2</sup>

Branching boxes with socket to flat cable No. 9040, 9055 and 49900

<b>Branching box 3-pole</b>		<b>Technical data</b>	
<b>No.</b>	Eldas-No.	LxWxH mm	88x38x38
<b>49913G/L1</b>	150 748 037	Weight g	71
<b>49913G/L2</b>	150 758 037	Fire load kWh	0.42
<b>49913G/L3</b>	150 768 037	Rated voltage V	250
		Max. rated current max. A	10
		Plastic parts	halogen-free
		Metal parts	corrosion-resistant
		Packing unit pce.	50
		Degree of protection	IP20
		with socket longitudinal connection	
		Tightening torque Nm	0.7
		screwdriver No.	1
		<i>Pre-wired connectors see page 78</i>	
<b>Branching box 5-pole</b>		<b>Technical data</b>	
<b>No.</b>	Eldas-No.	LxWxH mm	88x49x38
<b>49915G</b>	150 716 037	Weight g	96
		Fire load kWh	0.51
		Rated voltage V	250/400
		Max. rated current max. A	10
		Plastic parts	halogen-free
		Metal parts	corrosion-resistant
		Packing unit pce.	50
		Degree of protection	IP20
		with socket longitudinal connection	
		Tightening torque Nm	0.7
		screwdriver No.	1
		<i>Pre-wired connectors see page 78</i>	
<b>Feeding box</b>		<b>Technical data</b>	
<b>No.</b>	Eldas-No.	LxWxH mm	95x40x27
<b>49903</b>	150 709 037	Fire load kWh	0.78
		For connection of 1 round cable - mm <sup>2</sup>	5x2.5
		For connection of 1 flat cable - mm <sup>2</sup>	5x2.5
		Rated voltage V	500
		Max. rated current max. A	16
		Plastic parts	halogen-free
		Metal parts	corrosion-resistant
		Packing unit pce.	25
		Degree of protection	IP54
		consists of box No. 49901 and 20 cm heat shrinkable sleeve	
		splashproof and dustproof IP54	
		Tightening torque Nm	0.7
		screwdriver No.	1
<b>Connecting box</b>		<b>Technical data</b>	
<b>No.</b>	Eldas-No.	LxWxH mm	85x44x32
<b>9059M</b>	150 712 037	Weight g	160
		Fire load kWh	0.55
		Rated voltage V	500
		Max. rated current max. A	10
		Plastic parts	halogen-free
		Metal parts	corrosion-resistant
		Packing unit pce.	50
		Degree of protection	IP54
		splashproof and dustproof IP54	
		two lateral cable outlets with thread M16 for 1 Td cable up to 3x1.5 mm <sup>2</sup>	
		Tightening torque Nm (Pointed screws)	0.7
		screwdriver No.	1
		Tightening torque Nm (Clamping screws)	0.7
		screwdriver No.	1
<b>Cable glands</b>		<b>Technical data</b>	
<b>No.</b>	Eldas-No.	Weight g	56.2
<b>87098M</b>	121 680 407		M16x1.5
		Ø Diameter of cables mm	11-20.5
		Metal parts	corrosion-resistant
		Packing unit pce.	50
		Of nickel-plated brass	
<b>Blind plug</b>		<b>Technical data</b>	
<b>No.</b>	Eldas-No.	Weight g	7.9
<b>87100M</b>	126 222 420		M16x1.5
		Metal parts	corrosion-resistant
		Packing unit pce.	25
		Of nickel-plated brass	


# Woertz Technofil 5G1.5 mm<sup>2</sup> and 5G2.5 mm<sup>2</sup>

## Accessories

Cable end piece		Technical data	
No. <b>48510/05</b>	Eldas-No. 120 900 407	LxWxH mm 40x36x16 Weight g 14.3 Packing unit pce. 5  Degree of protection IP68	of polycarbonate, halogen-free; silicone gel  Note: Cut neatly both ends of the cable before mounting the end pieces. No need to strip the cable. Cable end piece may only be mounted once
			
Clamp		Technical data	
No. <b>9054</b>	Eldas-No. 120 018 007	LxWxH mm 28.5x13.5x8 Weight g 1.5 Fire load kWh 0.01 Packing unit pce. 100	<b>for screwing on</b> for fastening cables along ceiling of polyamide 6.6, halogen-free
			
No. <b>9042</b>	Eldas-No. 120 008 007	LxWxH mm 42x8.5x10 Weight g 2.4 Fire load kWh 0.02 Packing unit pce. 100	<b>for screwing on</b> to be used when cable is placed on a base of polyamide 6.6, halogen-free
			
No. <b>9041</b>	Eldas-No. 120 088 007	LxWxH mm 42x24x10 Weight g 6.5 Fire load kWh 0.04 Packing unit pce. 50	<b>for hanging up</b> for laying flat cable along wire ropes of polyamide 6.6, halogen-free
			
No. <b>9072</b>	Eldas-No. 120 068 107	LxWxH mm 69x9x8 Weight g 2 Fire load kWh 0.02 Packing unit pce. 100	<b>for clipping on</b> for laying cables into profiles EN 50022-35 of polyamide 6.6, halogen-free
			
Cable stripping tool		Technical data	
No. <b>49933</b>	Eldas-No. 983 050 627	Weight g 279 Packing unit pce. 1	This tool offers the advantage of stripping neatly and easily the cable without damaging the insulation of the conductors.
			
Shears		Technical data	
No. <b>49930</b>	Eldas-No. 983 045 007	Weight g 223 Packing unit pce. 1	For cutting neatly and easily every type of flat cables (max. width 32mm).  With sliding anvil. Teflon coated blades.
			

# Woertz power 5G2.5 mm<sup>2</sup>

Boxes placed wherever you want.  
Displaced whenever you need!

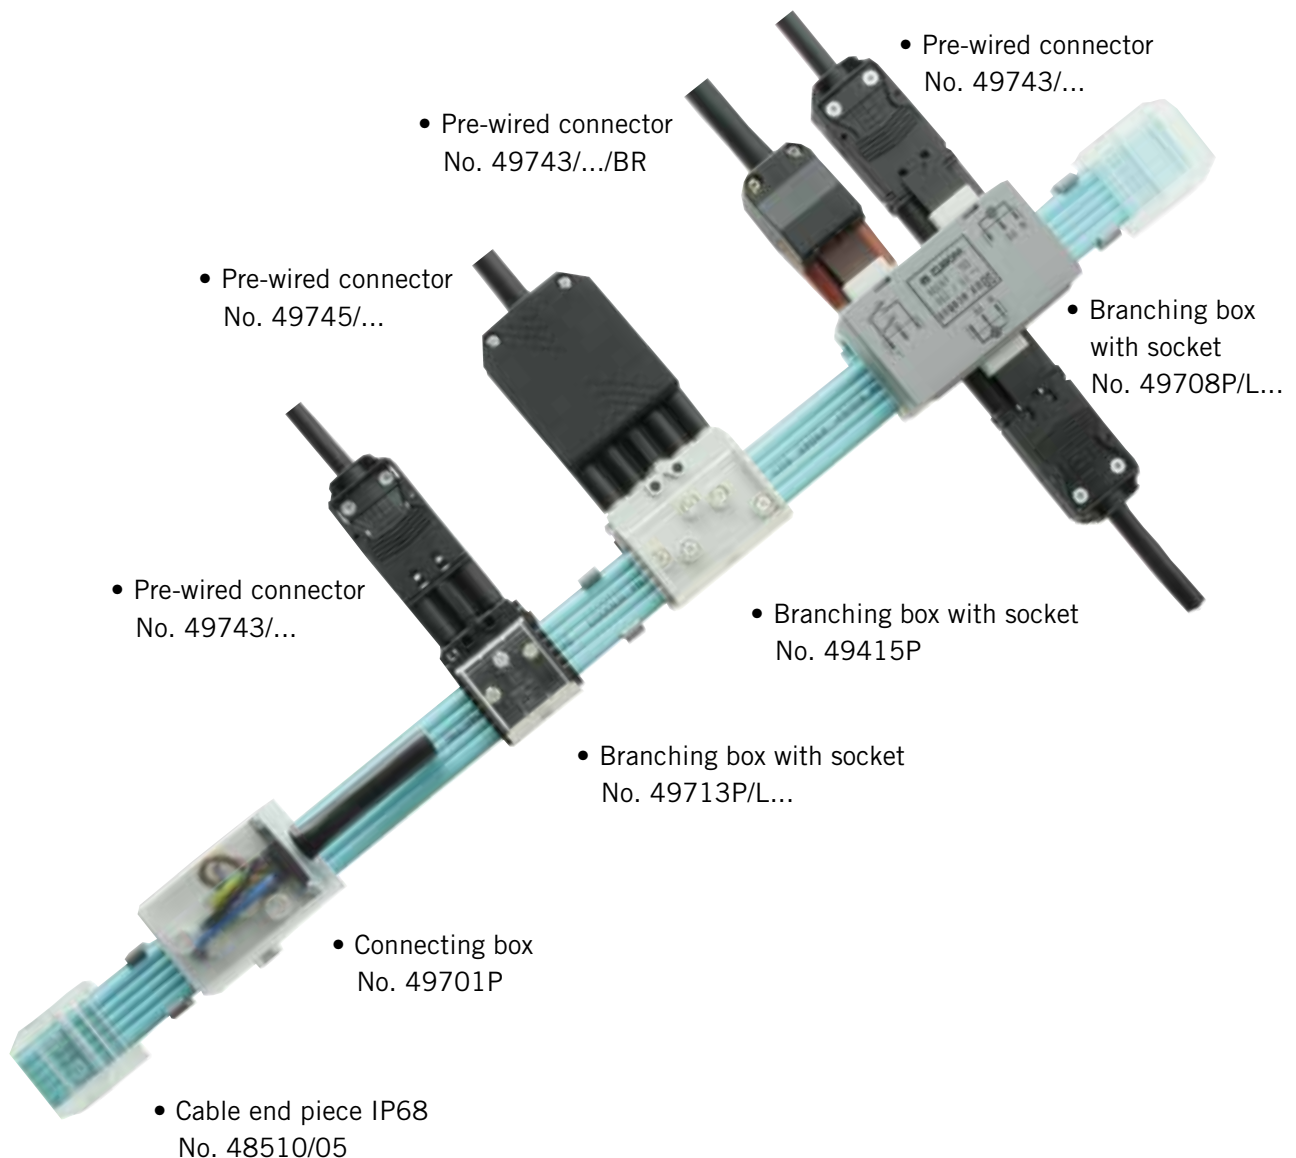












## Where are these flat cables used?

- in offices
- in supermarkets and shopping centres
- in museums and exhibitions
- for the lighting of platforms on railway stations and car parks
- for light industry
- for temporary lighting installations on sites

Flat cable enables installations to be completed easily with further connections.

# Woertz power 5G2.5 mm<sup>2</sup>

Flat cable 5G2.5 mm<sup>2</sup>

	PVC		halogen-free	
	No.	Eldas-No.	No.	Eldas-No.
	 <b>49845</b>	113 383 804	 <b>49846</b>	113 383 904
	 <b>49845RT</b>		 <b>49846RT</b>	
	 <b>49845SW</b>		 <b>49846SW</b>	
	 <b>49845WS</b>		 <b>49846WS</b>	
	 <b>49845/SM*</b>	113 383 814	 <b>49846/SM*</b>	113 383 954
3 L+N+PE	* on request		more colours on request	

## Technical data


Dimension	mm	24x6	24x6
Weight	g/m	259	247
Fire load	kWh/m	0.778	1.28
No. of leads x cross-section	mm <sup>2</sup>	5x2.5	5x2.5

## High current part

Copper conductors		tinned, highly flexible	tinned, highly flexible
Insulation of the leads		PVC	flame retardant polyethylene
Colour of the leads		grey, black, brown, blue, green/yellow	grey, black, brown, blue, green/yellow
Cross-section	mm <sup>2</sup>	2.5	2.5
Coat insulation		PVC	flame retardant polyethylene
Test voltage	kV / Hz	4 / 50	4 / 50
Nennspannung	kV	0.6/1	0.6/1
DC-resistance	Ω/km	8.21	8.21
Max. operating temperature	°C	-15 to +70	-15 to +90
Min. Installation temperature	°C	+5	+5
Cu weight	kg/km	120	120

# Woertz power 5G2.5 mm<sup>2</sup>

## Junction box to flat cable No. 49845 and 49846

Junction box		Technical data					
<div>No.</div> <div>Eldas-No.</div> <div>49701P</div> <div>150 776 037</div> <div></div>		LxWxH mm	58x41x39	with screw-type connection for supply and branching no need to strip the insulation Plastic parts: halogen-free Metal parts: corrosion-resistant			
		Fire load kWh	0.33				
		Cross-section mm²	5x2.5				
		Connecting capacity Ø	3.75				
		Rated voltage V	690	Tightening torque Nm (Pointed screws) 0.7 screwdriver No. 1 Tightening torque Nm (Clamping screws) 0.7 screwdriver No. 1			
		Max. rated current max. A	16				
		Packing unit pce.	50				
		Degree of protection	IP20				
		Junction box		Technical data			
		<div>No.</div> <div>Eldas-No.</div> <div>49901</div> <div>150 708 037</div> <div></div>		LxWxH mm	95x40x27	with screw-type connection  for the connection of 2 cables or supply at the end of the cable	
Fire load kWh	0.33						
Cross-section for 1 round cable to mm²	5x2.5						
Cross-section for 1 flat cable to mm²	5x2.5						
Rated voltage V	500			Plastic parts: halogen-free Metal parts: corrosion-resistant  Tightening torque Nm 0.7 screwdriver No. 1			
Max. rated current max. A	16						
Packing unit pce.	25						
Degree of protection	IP20						
Junction box flat execution				Technical data			
<div>No.</div> <div>Eldas-No.</div> <div>49703P</div> <div>150 701 017</div> <div></div>				LxWxH mm	96x60x23	for supply and branching, no need to strip the insulation, flat execution 3P+N+PE  for two flexible round cable of PVC up to 5x1.5 mm² with end sleeves for strands or rigid round cables up to 5x2.5 mm²	
		Fire load kWh	0.38				
		Connecting capacity Ø mm	6-13				
		Spring clamp terminals	2/Pol				
		Rated voltage V	690	Plastic parts: halogen-free Metal parts: corrosion-resistant Tightening torque Nm 0.7 screwdriver No. 1			
		Max. rated current max. A	16				
		Cross-section mm²	(2x) 5x2.5				
		Packing unit pce.	50				
		Degree of protection	IP20				
		Branching box with socket		Technical data			
<div>No.</div> <div>Eldas-No.</div> <div>49713P/L1</div> <div>150 710 137</div> <div>49713P/L2</div> <div>150 710 237</div> <div>49713P/L3</div> <div>150 710 117</div> <div></div>		LxWxH mm	34.5x57.5x25.7	3-pole  lateral connection  Plastic parts: halogen-free Metal parts: corrosion-resistant Tightening torque Nm 0.7 screwdriver No. 1			
		Fire load kWh	0.18				
		socket	type GST18i3 code 1				
		Rated voltage V	250				
		Max. rated current max. A	16	Pre-wired connectors see page 82			
		Packing unit pce.	50				
		Degree of protection	IP20				
		Branching box with socket		Technical data			
		<div>No.</div> <div>Eldas-No.</div> <div>49413P</div> <div>150 710 127</div> <div></div>		LxWxH mm	48x40x34	3-pole with phase selection  longitudinal connection  Plastic parts: halogen-free Metal parts: corrosion-resistant Tightening torque Nm 0.7 screwdriver No. 1	
Fire load kWh	0.32						
socket	type GST18i3 code 1						
Rated voltage V	250						
Max. rated current max. A	16			Pre-wired connectors see page 82			
Packing unit pce.	25						
Degree of protection	IP20						
Branching box with socket				Technical data			
<div>No.</div> <div>Eldas-No.</div> <div>49715P</div> <div>150 710 337</div> <div></div>				LxWxH mm	54x57.5x25.7	5-pole  lateral connection  Plastic parts: halogen-free Metal parts: corrosion-resistant Tightening torque Nm 0.7 screwdriver No. 1	
		Fire load kWh	0.27				
		socket	type GST18i5 code 1				
		Rated voltage V	250/400				
		Max. rated current max. A	16	Pre-wired connectors see page 82			
		Packing unit pce.	50				
		Degree of protection	IP20				



## Junction box to flat cable No. 49845 and 49846

Junction box SBox		Technical data		
No.	Eldas-No.	LxWxH mm	74x67x37	for lighting installations with I/O switch or impulse switch  Plastic parts: halogen-free Metal parts: corrosion-resistant Tightening torque Nm 0.7 screwdriver No. 1  <i>Pre-wired connectors see page 82</i>
49705P/L1	150 711 317	Fire load kWh	0.51	
49705P/L2	150 711 337	Colour of box L1/L2/L3	l'grey/d'grey/black	
49705P/L3	150 711 357	Socket switch	type GST18i3 code 4 (brown)	
		Socket lamps	type GST18i3 code 1	
		Rated voltage V	250	
		Max. rated current max. A	16	
		Packing unit pce.	50	
		Degree of protection	IP20	
Junction box SBox		Technical data		
No.	Eldas-No.	LxWxH mm	74x67x37	
49706P/L1	150 712 317	Fire load kWh	0.51	
49706P/L2	150 712 337	Colour of box L1/L2/L3	l'grey/d'grey/black	
49706P/L3	150 712 357	Socket switch	type GST18i3 code 4 (brown)	
		Socket lamps	type GST18i3 code 1	
		Rated voltage V	250	
		Max. rated current max. A	16	
		Packing unit pce.	50	
		Degree of protection	IP20	
Junction box SBox		Technical data		for lighting installations with changeover contact  Plastic parts: halogen-free Metal parts: corrosion-resistant Tightening torque Nm 0.7 screwdriver No. 1  <i>Pre-wired connectors see page 82</i>
No.	Eldas-No.	LxWxH mm	74x88x37	
49707P/L1	150 713 317	Fire load kWh	0.54	
49707P/L2	150 713 337	Colour of box L1/L2/L3	l'grey/d'grey/black	
49707P/L3	150 713 357	Socket switch	type GST18i3 code 4 (brown)	
		Socket lamps	type GST18i3 code 1	
		Rated voltage V	250	
		Max. rated current max. A	16	
		Packing unit pce.	50	
		Degree of protection	IP20	
Junction box SBox		Technical data		for lighting installations with series connection  Plastic parts: halogen-free Metal parts: corrosion-resistant Tightening torque Nm 0.7 screwdriver No. 1  <i>Pre-wired connectors see page 82</i>
No.	Eldas-No.	LxWxH mm	74x88x37	
49708P/L1	150 714 317	Fire load kWh	0.54	
49708P/L2	150 714 337	Colour of box L1/L2/L3	l'grey/d'grey/black	
49708P/L3	150 714 357	Socket switch	type GST18i3 code 4 (brown)	
		Socket lamps	type GST18i3 code 1	
		Rated voltage V	250	
		Max. rated current max. A	16	
		Packing unit pce.	50	
		Degree of protection	IP20	
Cable end piece		Technical data		of polycarbonate, halogen-free; silicone gel  Note: Cut neatly both ends of the cable before mounting the end pieces. No need to strip the cable. Cable end piece may only be mounted once.
No.	Eldas-No.	LxWxH mm	40x36x16	
48510/05	120 900 40	Weight g	14.3	
		Fire load kWh	n.a.	
		Packing unit pce.	5	
		Degree of protection	IP68	

# Woertz power 5G2.5 mm<sup>2</sup>

## Accessories

Cable fastening clamp		Technical data		
<b>No.</b> <b>49731</b>	Eldas-No. 120 008 107	LxWxH mm Weight g Fire load kWh Packing unit pce.	52x10x10 2 0.02 100	of polyamide 6.6, halogen-free
				
<b>No.</b> <b>49733</b> <b>49733A</b>	Eldas-No. 150 900 117 150 900 107	LxWxH mm Weight g Fire load kWh Packing unit pce.	40x15x15 3.7 0.03 100	<b>49733</b> for screwing on <b>49733A</b> for sticking on  of polyamide 6.6, halogen-free
				
<b>No.</b> <b>9054</b>	Eldas-No. 120 018 007	LxWxH mm Weight g Fire load kWh Packing unit pce.	28.5x13.5x8 1.5 0.01 100	<b>for screwing on</b> for fastening cables along ceiling of polyamide 6.6, halogen-free
				
<b>No.</b> <b>49735</b>	Eldas-No.	LxWxH mm Packing unit pce.	10x51x1 10	Stainless steel V4A
				
Shears		Technical data		
<b>No.</b> <b>49930</b>	Eldas-No. 983 045 007	Weight g Packing unit pce.	223 1	For cutting neatly and easily every type of flat cables (max. width 32mm).  With sliding anvil. Teflon coated blades.
				
<b>Cable stripping tool</b> <b>No.</b> <b>49933</b>	Eldas-No. 983 050 627	<b>Cable stripping tool</b> <b>to feeding box 49901, 9052</b>		
Insulating tape		Technical data		
<b>No.</b> <b>49960</b>	Eldas-No. 171 013 004	LxWxH mm Weight g Dielectric strength max. kV/mm Temperature max. °C Packing unit pce.	102x100x2.3 33 23 +70 10	To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.  Weatherproof, self-fusing
				
Spacer with clips		Technical data		
<b>No.</b> <b>49738P</b>	Eldas-No. 150 901 027	Packing unit pce.	10	Suitable for connecting boxes for lighting installations  To fix the boxes on a surface.
				


## Mounting procedure of junction box No. 49701P




Place the junction box on the flat cable - the different lugs prevent the box from incorrect mounting.



Push on the baseplate (light green). In case of incorrect mounting the bottom part of the box cannot be fitted with normal force.



Introduce the round cable into the flat cable box. Tighten the strain relief clamp to maintain the round cable.



Turn in the pointed screws as far as they will go.



Clip the hood.

The mounting procedure may also occur in a changed order: 3, 1, 2, 4, 5.



To release the hood, insert a screwdriver in the slit provided for the purpose and lift slightly.



The overcurrent protection devices will be chosen in relation to the length of installed cables so that their response time conform to specifications in case of malfunction.

### Possibility of pre-wiring:

#### the installation becomes more rational!

On request, the connectors may be provided in advance with round outgoing cables.


On the building site the pre-wired boxes have only to be positioned - sockets and lighting circuits will be ready to function in a matter of seconds - to your advantage.



# Woertz combi 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup>

Power current and data lines combined in one cable.

**Attention: Not combinable with Woertz Dali.**

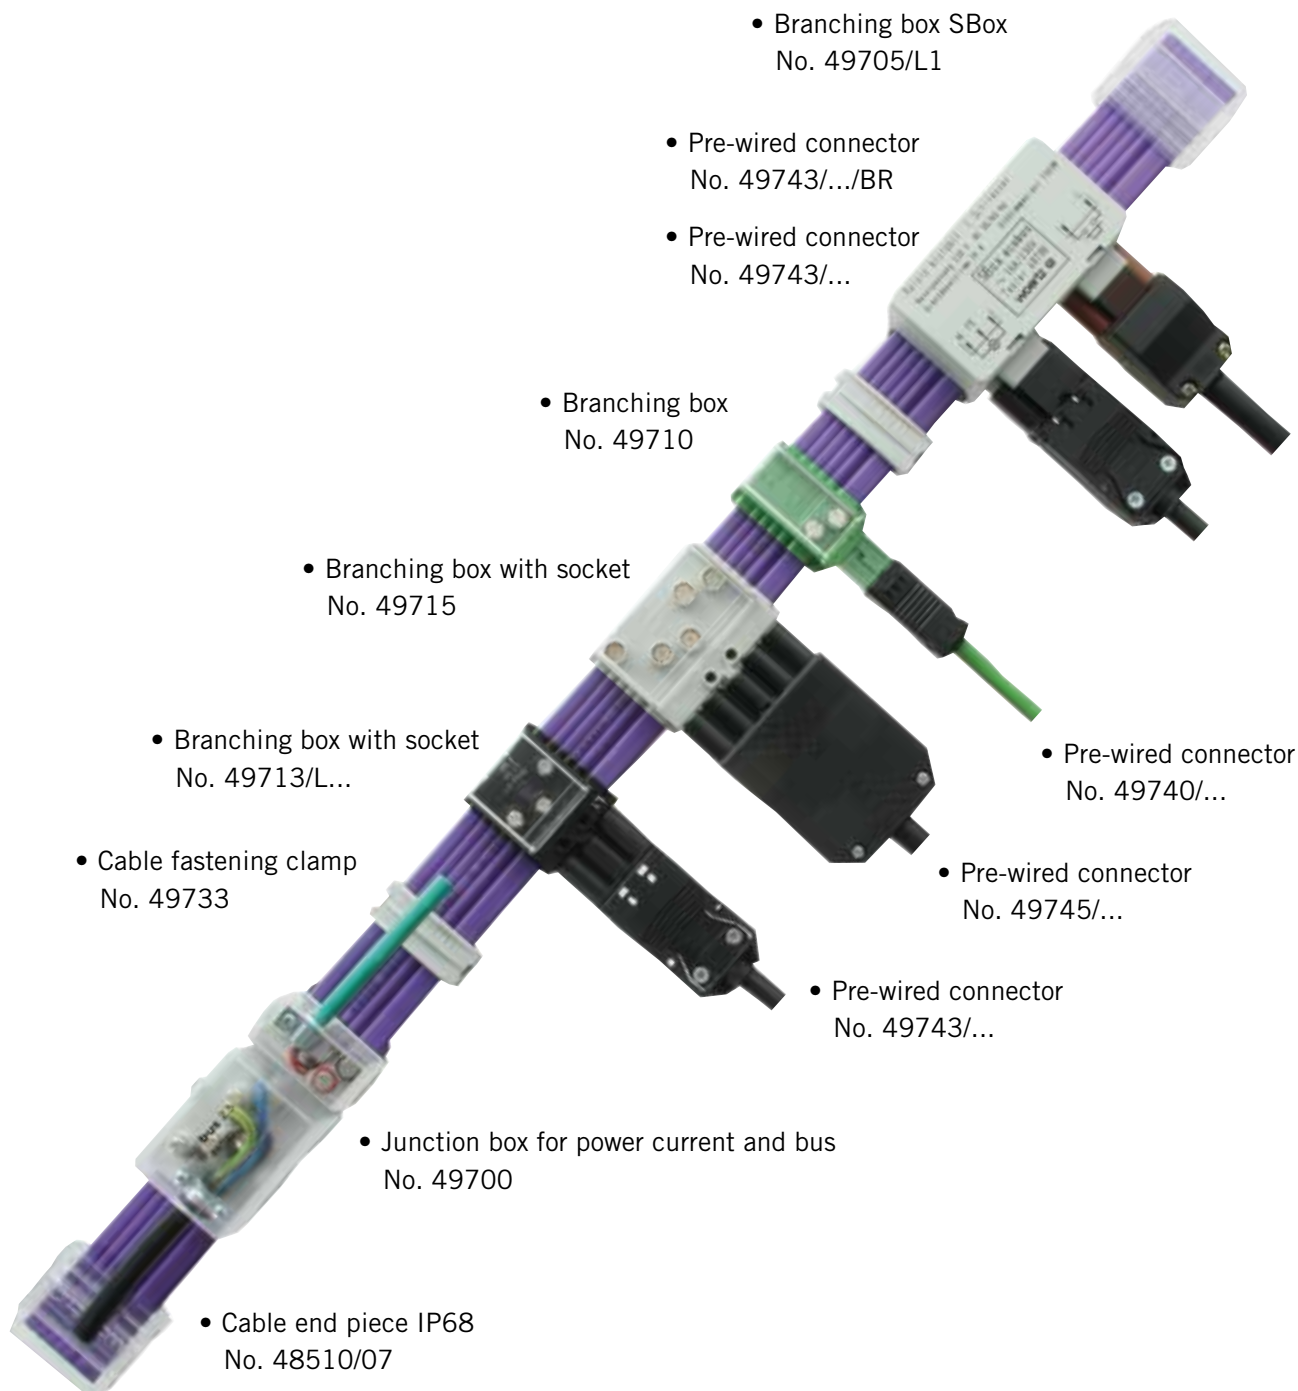

## Where are these flat cables used?

- in office buildings
- in hospitals, clinics and residential facilities
- in industrial buildings
- in hotels

Flat cable enables installations to be completed easily with further connections.

# Woertz combi 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup>

Flat cable Woertz combi 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup>



PVC		halogen-free	
No.	Eldas-No.	No.	Eldas-No.
49945	113 388 083	49946	113 388 007
49945RT		49946RT	
49945SW		49946SW	
49945WS		49946WS	
49945/SM*	113 388 084	49946/SM*	113 388 004
* on request		more colours on request	

3L+N+PE+2Bus

## Technical data

Dimension	mm	32×6	32×6
Weight	g/m	350	340
Fire load	kWh/m	1.18	1.79
No. of leads x cross-section	mm <sup>2</sup>	5×2.5 + 2×1.5	5×2.5 + 2×1.5

## High current part

Copper conductors		tinned, highly flexible	tinned, highly flexible
Insulation of the leads		PVC	flame retardant polyethylene
Colour of the leads		grey, black, brown, blue, yellow/green	grey, black, brown, blue, yellow/green
Cross-section	mm <sup>2</sup>	2.5	2.5
Coat insulation		PVC	flame retardant polyethylene
Test voltage	kV / Hz	4 / 50	4 / 50
Rated voltage	kV	0.6/1	0.6/1
DC-resistance	Ω/km	8.21	8.21
Max. operating temperature	°C	-15 to +70	-15 to +90
Min. installation temperature	°C	+5	+5
Cu weight	kg/km	120	120




## Bus part

Copper conductors		tinned	tinned
Insulation of the leads		Polyethylene	Polyethylene
Colour of the leads		neutral	neutral
Schirm		Double shield of aluminium	double shield of aluminium
Cross-section	mm <sup>2</sup>	1.5	1.5
Coat insulation		PVC	flame retardant polyethylene
Test voltage	kV / Hz	4 / 50	4 / 50
Rated voltage	V	50	50
Max. rated current	A	3	3
DC-resistance	Ω/km	13.7	13.7
Capacitance	pF/m	70	70
Attenuation at 1Hz	dB/m	1.2	1.2
Charact. impedance at 1 MHz	nom Ω	nom. 75	nom. 75
Cu weight	kg/km	29	29




## Woertz combi 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup>

Junction box with screw-type connection to flat cable No. 49945 and 49946

Junction box 5-pole with bus		Technical data			
<div>No.</div> <div>49700</div> <div></div>	<div>Eldas-No.</div> <div>150 775 137</div>	LxWxH mm	76x41x39	for supply and branching, for power current and bus	
		Weight g	86	Plastic parts halogen-free	
		Fire load kWh	0.47	Metal parts corrosion-resistant	
		Cross-section mm²	5x2.5+ 2x1.5	Packing unit pce. 50	
		Connecting capacity Ø	3.75 + 3.2		
		Rated voltage Power current V	690		
		Max. rated current Power current A	16		
		Rated voltage bus part V	50		
		Max. rated current max. bus part A	3		
		Degree of protection	IP20		
Junction box 5-pole		Technical data			
<div>No.</div> <div>49701</div> <div></div>	<div>Eldas-No.</div> <div>150 775 037</div>	LxWxH mm	58x41x39	for supply and branching, for bus	
		Weight g	55	Plastic parts halogen-free	
		Fire load kWh	0.33	Metal parts corrosion-resistant	
		Cross-section mm²	5x2.5		
		Connecting capacity Ø	3.75		
		Rated voltage Power current V	690		
		Max. rated current Power current A	16		
		Packing unit pce.	50	Tightening torque Nm 0.7	
		Degree of protection	IP20	screwdriver No. 1	
		Junction box for bus		Technical data	
<div>No.</div> <div>49702</div> <div></div>	<div>Eldas-No.</div> <div>150 732 037</div>	LxWxH mm	21x41x39	for supply and branching, for bus	
		Weight g	23	Plastic parts halogen-free	
		Fire load kWh	0.14	Metal parts corrosion-resistant	
		Cross-section mm²	2x1.5		
		Connecting capacity Ø	3.2		
		Rated voltage bus part V	50		
		Max. rated current max. bus part A	3		
		Packing unit pce.	50	Tightening torque Nm 1.0	
		Degree of protection	IP20	screwdriver No. 3	

Junction box, flat execution to flat cable No. 49945 and 49946

Junction box		Technical data	
<div>No. 49703</div> <div>Eldas-No. 150 701 007</div> <div></div>	LxWxH mm	96x60x23	for supply and branching, no need to strip the insulation, flat execution 3P+N+PE
	Weight g	71.1	
	Fire load kWh	0.38	
	Spring clamp terminals per pole	2	for two flexible round cable of PVC up to 5x1.5 mm² with end sleeves for strands or rigid round cables up to 5x2.5 mm²
	Connecting capacity Ø	6-13 mm	
	Rated voltage V	690	
	Max. rated current max. A	16	
	Cross-section mm²	(2x) 5x2.5	
	Plastic parts	halogen-free	
	Metal parts	corrosion-resistant	
Packing unit pce.	50	Tightening torque Nm	0.7
		screwdriver No.	1
Degree of protection	IP20		

# Woertz combi 5G2.5 mm<sup>2</sup> + 2x1.5 mm<sup>2</sup>

Branching boxes with socket to flat cable No. 49945 and 49946

Branching box 3-pole		Technical data	
No.	Eldas-No.	LxWxH mm	34.5x57.5x25.7
49713/L1	150 700 137	Weight g	40
49713/L2	150 700 237	Fire load kWh	0.18
49713/L3	150 700 117	Socket	type GST18i3 code 1
		Rated voltage V	250
		Max. rated current max. A	16
		Packing unit pce.	50
		Degree of protection	IP20
		lateral connection	Plastic parts Metal parts
			halogen-free corrosion-resistant
		Tightening torque Nm	0.7
		screwdriver No.	1
		Pre-wired connectors see page 82	
Branching box 3-pole		Technical data	
No.	Eldas-No.	LxWxH mm	48x40x34
49413/C	150 700 127	Weight g	55
		Fire load kWh	0.32
		Socket	type GST18i3 code 1
		Rated voltage V	250
		Max. rated current max. A	16
		Packing unit pce.	25
		Degree of protection	IP20
		longitudinal connection	Phase selection
			Plastic parts Metal parts
			halogen-free corrosion-resistant
		Tightening torque Nm	0.7
		screwdriver No.	1
		Pre-wired connectors see page 82	
Branching box 5-pole		Technical data	
No.	Eldas-No.	LxWxH mm	54x57.5x25.7
49715	150 700 337	Weight g	65
		Fire load kWh	0.27
		Socket	type GST18i5 code 1
		Rated voltage V	250/400
		Max. rated current max. A	16
		Packing unit pce.	50
		Degree of protection	IP20
		with socket lateral connection	Plastic parts Metal parts
			halogen-free corrosion-resistant
		Tightening torque Nm	0.7
		screwdriver No.	1
		Pre-wired connectors see page 82	
Branching box 2-pole for KNX		Technical data	
No.	Eldas-No.	LxWxH mm	27x57.5x25.7
49710	150 701 187	Weight g	18
		Fire load kWh	0.12
		Socket	type BST14i2 code KNX
		Rated voltage V	50
		Max. rated current max. A	3
		Packing unit pce.	50
		Degree of protection	IP20
		with socket lateral connection	Plastic parts Metal parts
			halogen-free corrosion-resistant
		Tightening torque Nm	1.0
		screwdriver No.	3
		Pre-wired connectors see page 82	
Branching box 2-pole for bus		Technical data	
No.	Eldas-No.	LxWxH mm	27x57.5x25.7
49711	150 702 237	Weight g	18
		Fire load kWh	0.12
		Socket	type BST14i3 code 3
		Rated voltage V	50
		Max. rated current max. A	3
		Packing unit pce.	50
		Degree of protection	IP20
		with socket lateral connection	Plastic parts Metal parts
			halogen-free corrosion-resistant
		Tightening torque Nm	1.0
		screwdriver No.	3
		Pre-wired connectors see page 82	
Branching box 2-pole for bus		Technical data	
No.		LxWxH mm	27x57.5x25.7
49717		Weight g	18
		Fire load kWh	0.12
		Socket	code Woertz
		Rated voltage V	50
		Max. rated current max. A	3
		Packing unit pce.	50
		Degree of protection	IP20
		lateral connection	Plastic parts Metal parts
			halogen-free corrosion-resistant
		Tightening torque Nm	1.0
		screwdriver No.	3
		Pre-wired connectors see page 82	

# Woertz combi 5G2.5 mm<sup>2</sup> + 2x1.5 mm<sup>2</sup>

Branching boxes with socket to flat cable No. 49945 and 49946

<b>Branching box 2-pole for KNX</b>		<b>Technical data</b>	
	No.	Eldas-No.	LxWxH mm
	49720/C	150 707 137	44x39.5x28
			Weight g
			19
			Fire load kWh
			0.12
			Socket
			type BST14i2
			code KNX
			Rated voltage V
		50	
		Max. rated current max. A	
		3	
		Packing unit pce.	
		50	
		Degree of protection	
		IP20	
		longitudinal connection	
		Plastic parts	
		halogen-free	
		Metal parts	
		corrosion-resistant	
		Tightening torque Nm	
		1.0	
		screwdriver No.	
		3	
		<i>Pre-wired connectors see page 82</i>	
<b>Branching box 2-pole for bus</b>		<b>Technical data</b>	
	No.	Eldas-No.	LxWxH mm
	49721/C	150 707 237	44x39.5x28
			Weight g
			19
			Fire load kWh
			0.12
			Socket
			type BST14i3
			code 3
			Rated voltage V
		50	
		Max. rated current max. A	
		3	
		Packing unit pce.	
		50	
		Degree of protection	
		IP20	
		longitudinal connection	
		Plastic parts	
		halogen-free	
		Metal parts	
		corrosion-resistant	
		Tightening torque Nm	
		1.0	
		screwdriver No.	
		3	
		<i>Pre-wired connectors see page 82</i>	
<b>Branching box 2-pole for bus</b>		<b>Technical data</b>	
	No.	Eldas-No.	LxWxH mm
	49727/C	150 707 337	44x39.5x28
			Weight g
			19
			Fire load kWh
			0.12
			Socket
			code Woertz
			Rated voltage V
			50
		Max. rated current max. A	
		3	
		Packing unit pce.	
		50	
		Degree of protection	
		IP20	
		longitudinal connection	
		Plastic parts	
		halogen-free	
		Metal parts	
		corrosion-resistant	
		Tightening torque Nm	
		1.0	
		screwdriver No.	
		3	
		<i>Pre-wired connectors see page 82</i>	
<b>Branching box 2- and 3-pole</b>		<b>Technical data</b>	
	No.	Eldas-No.	LxWxH mm
	49723/L1	150 701 137	59.5x57.5x25.7
	49723/L2	150 701 237	Weight g
	49723/L3	150 701 117	57.5
			Fire load kWh
			0.29
			Socket
			type GST18i3 + BST14i2
			code KNX
			Rated voltage Power current V
			250
			Rated voltage bus V
			50
		Max. rated current max. Power current A	
		16	
		Max. rated current max. bus A	
		3	
		Degree of protection	
		IP20	
		lateral connection	
		Plastic parts	
		halogen-free	
		Metal parts	
		corrosion-resistant	
		Packing unit pce.	
		50	
		Tightening torque Nm (Power current)	
		0.7	
		screwdriver No. (Power current)	
		1	
		Tightening torque Nm (bus part)	
		1.0	
		screwdriver No. (bus part)	
		3	
		<i>Pre-wired connectors see page 82</i>	
<b>Branching box 2- and 3-pole</b>		<b>Technical data</b>	
	No.	Eldas-No.	LxWxH mm
	49724/L1	150 703 037	59.5x57.5x25.7
	49724/L2	150 703 137	Weight g
	49724/L3	150 703 017	57.5
			Fire load kWh
			0.29
			Socket
			type GST18i3 + BST14i3
			code 3
			Rated voltage Power current V
			250
			Rated voltage bus V
			50
		Max. rated current max. Power current A	
		16	
		Max. rated current max. bus A	
		3	
		Degree of protection	
		IP20	
		lateral connection	
		Plastic parts	
		halogen-free	
		Metal parts	
		corrosion-resistant	
		Packing unit pce.	
		50	
		Tightening torque Nm (Power current)	
		0.7	
		screwdriver No. (Power current)	
		1	
		Tightening torque Nm (bus part)	
		1.0	
		screwdriver No. (bus part)	
		3	
		<i>Pre-wired connectors see page 82</i>	
<b>Branching box 2- and 5-pole</b>		<b>Technical data</b>	
	No.	Eldas-No.	LxWxH mm
	49725	150 705 137	79x57.5x25.7
			Weight g
			82
			Fire load kWh
			0.40
			Socket
			type GST18i5 + BST14i2
			code KNX
			Rated voltage Power current V
			250/400
			Rated voltage bus V
			50
		Max. rated current max. Power current A	
		16	
		Max. rated current max. bus A	
		3	
		Degree of protection	
		IP20	
		lateral connection	
		Plastic parts	
		halogen-free	
		Metal parts	
		corrosion-resistant	
		Packing unit pce.	
		50	
		Tightening torque Nm (Power current)	
		0.7	
		screwdriver No. (Power current)	
		1	
		Tightening torque Nm (bus part)	
		1.0	
		screwdriver No. (bus part)	
		3	
		<i>Pre-wired connectors see page 82</i>	

# Woertz combi 5G2.5 mm<sup>2</sup> + 2x1.5 mm<sup>2</sup>

Branching box and junction box to flat cable No. 49945 and 49946







branching box 2- and 5-pole		Technical data	
No.	Eldas-No.	LxWxH mm	79x57.5x25.7
49726	150 705 237	Weight g	82
		Fire load kWh	0.40
		Socket type GST18i5 + BST14i3 code 3	
		Rated voltage Power current V	250/400
		Rated voltage bus V	50
		Max. rated current max. Power current A	16
		Max. rated current max. bus A	3
		Degree of protection	IP20
		lateral connection	
		Plastic parts	halogen-free
		Metal parts	corrosion-resistant
		Packing unit pce.	50
		Tightening torque Nm (Power current)	0.7
		screwdriver No. (Power current)	1
		Tightening torque Nm (bus part)	1.0
		screwdriver No. (bus part)	3
		Pre-wired connectors see page 82	
Junction box SBox		Technical data	
No.	Eldas-No.	LxWxH mm	74x67x37
49705/L1	150 711 307	Weight g	94
49705/L2	150 711 327	Fire load kWh	0.20
49705/L3	150 711 347	Colour of box L1/L2/L3	l'grey/d'grey/black
		Socket switch type GST18i3 code 4 (brown)	
		Socket lamps type GST18i3 code 1	
		Rated voltage V	250
		Max. rated current max. A	16
		Degree of protection	IP20
		for lighting installations with I/O switch	
		Plastic parts	halogen-free
		Metal parts	corrosion-resistant
		Packing unit pce.	50
		Tightening torque Nm	0.7
		screwdriver No.	1
		Pre-wired connectors see page 82	
Junction box SBox		Technical data	
No.	Eldas-No.	LxWxH mm	74x67x37
49706/L1	150 712 307	Weight g	110
49706/L2	150 712 327	Fire load kWh	0.20
49706/L3	150 712 347	Colour of box L1/L2/L3	l'grey/d'grey/black
		Socket switch type GST18i3 code 4 (brown)	
		Socket lamps type GST18i3 code 1	
		Rated voltage V	250
		Max. rated current max. A	16
		Degree of protection	IP20
		for lighting installations with impulse switch	
		Plastic parts	halogen-free
		Metal parts	corrosion-resistant
		Packing unit pce.	50
		Tightening torque Nm	0.7
		screwdriver No.	1
		Pre-wired connectors see page 82	
Junction box SBox		Technical data	
No.	Eldas-No.	LxWxH mm	74x88x37
49707/L1	150 713 307	Weight g	120
49707/L2	150 713 327	Fire load kWh	0.20
49707/L3	150 713 347	Colour of box L1/L2/L3	l'grey/d'grey/black
		Socket switch type GST18i3 code 4 (brown)	
		Socket lamps type GST18i3 code 1	
		Rated voltage V	250
		Max. rated current max. A	16
		Degree of protection	IP20
		for lighting installations with changeover contact	
		Plastic parts	halogen-free
		Metal parts	corrosion-resistant
		Packing unit pce.	50
		Tightening torque Nm	0.7
		screwdriver No.	1
		Pre-wired connectors see page 82	
Junction box SBox		Technical data	
No.	Eldas-No.	LxWxH mm	74x88x37
49708/L1	150 714 307	Weight g	120
49708/L2	150 714 327	Fire load kWh	0.20
49708/L3	150 714 347	Colour of box L1/L2/L3	l'grey/d'grey/black
		Socket switch type GST18i3 code 4 (brown)	
		Socket lamps type GST18i3 code 1	
		Rated voltage V	250
		Max. rated current max. A	16
		Degree of protection	IP20
		for lighting installations with series connection	
		Plastic parts	halogen-free
		Metal parts	corrosion-resistant
		Packing unit pce.	50
		Tightening torque Nm	0.7
		screwdriver No.	1
		Pre-wired connectors see page 82	

Raptor actuators - see separate flyer „building automation“



# Woertz combi 5G2.5 mm<sup>2</sup> + 2x1.5 mm<sup>2</sup>

## Accessories

<b>Cable end piece</b>		<b>Technical data</b>	
<b>No.</b> <b>48510/07</b>	Eldas-No. 120 900 607	LxWxH mm Weight g Fire load kWh Packing unit pce. Degree of protection	40x44x16 16.8 k.A. 4 IP68
		of polycarbonate, halogen-free; silicone gel  Note: Cut neatly both ends of the cable before mounting the end pieces. No need to strip the cable. Cable end piece may only be mounted once.	
<b>Cable fastening clamp</b>		<b>Technical data</b>	
<b>No.</b> <b>49731</b>	Eldas-No. 120 008 107	LxWxH mm Weight g Fire load kWh Packing unit pce.	52x10x10 2 0.02 100
		of polyamide 6.6, halogen-free	
<b>Clamp for screwing on</b>		<b>Technical data</b>	
<b>No.</b> <b>49733</b> <b>49733A</b>	Eldas-No. 150 900 117 150 900 107	LxWxH mm Weight g Fire load kWh Packing unit pce.	40x15x15 3.7 0.03 100
		<b>49733</b> for screwing on <b>49733A</b> for sticking on  of polyamide 6.6, halogen-free	
<b>Shears</b>		<b>Technical data</b>	
<b>No.</b> <b>49930</b>	Eldas-No. 983 045 007	Weight g Packing unit pce.	223 1
		For cutting neatly and easily every type of flat cables (max. width 32mm).  With sliding anvil. Teflon coated blades.	
<b>Insulating tape</b>		<b>Technical data</b>	
<b>No.</b> <b>49960</b>	Eldas-No. 171 013 004	LxWxH mm Weight g Dielectric strength max. kV/mm Temperature max. °C Packing unit pce.	102x100x2.3 33 23 +70 10
		To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.  Weatherproof, self-fusing	
<b>Spacer with clips</b>		<b>Technical data</b>	
<b>No.</b> <b>49738</b>	Eldas-No. 150 901 017	Packing unit pce.	10
		Suitable for connecting boxes for lighting installations  To fix the boxes on a surface.	




## Mounting procedure of junction box No. 49700 / 49701



Place the junction box on the flat cable - the different lugs prevent the box from incorrect mounting.




Push on the baseplate (violet.)  
In case of incorrect mounting the bottom part of the box cannot be fitted with normal force.



### High current part and bus parts

Introduce the round cable into the flat cable box. Tighten the strain relief clamp to maintain the round cable.




Turn in the pointed screws as far as they will go.



Clip the hood.

The mounting procedure may also occur in a changed order: 3, 1, 2, 4, 5.



To release the hood, insert a screwdriver in the slit provided for the purpose and lift slightly.

## Possibility of pre-wiring:

### Service to our customers.

On request, the connectors may be provided in advance with round outgoing cables.

The connecting boxes which are dedicated to be placed at regular intervals in office buildings may be mounted in advance (fig. 1-3 above) in our workshops. It is also possible to prewire all the sockets which are mounted in under-window ducts or floor ducts. On the building site, the connection to the flat cable will be done in a matter of seconds! Important time savings will be performed - to your advantage!




# Woertz Dali

## 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup>

Power current and data lines combined in one cable.

**Attention: Not combinable with Woertz Combi.**

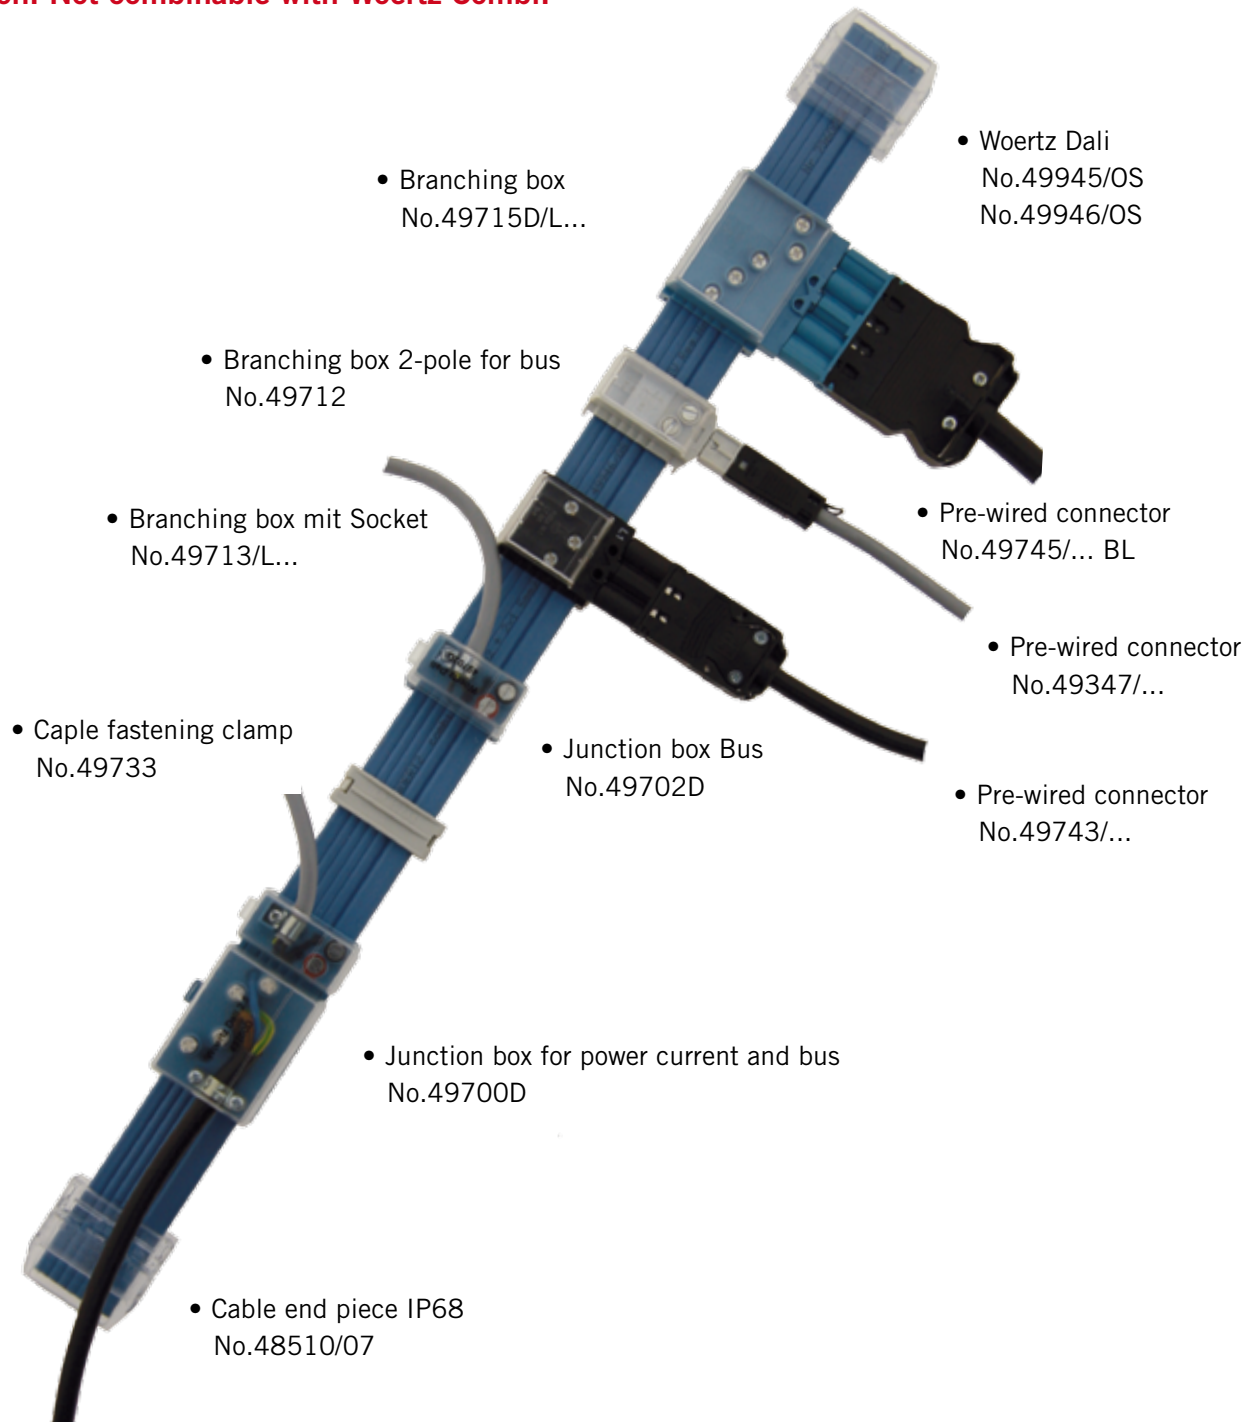




### Where are these flat cables used?

- in office buildings
- in hospitals, clinics and residential facilities
- in industrial buildings
- in hotels/restaurants

Flat cable enables installations to be completed easily with further connections.




# Woertz Dali 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup>

Flat cable Woertz Dali 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup>


		PVC		halogen-free	
		No.	Eldas-No.	No.	Eldas-No.
		 49945/OS shield	113 488 018	 49946/OS shield	113 488 118
3L+N+PE+2Bus					
Technical data					
Dimension	mm	32×6		32×6	
Weight	g/m	350		340	
Fire load	kWh/m	1.18		1.79	
No. of leads x cross-section	mm²	5×2.5 + 2×1.5		5×2.5 + 2×1.5	
High current part					
Copper conductors		tinned, finely stranded		tinned, finely stranded	
Insulation of the leads		PVC		flame retardant polyethylene	
Colour of the leads		grey, black, brown, blue, yellow/green		grey, black, brown, blue, yellow/green	
Cross-section	mm²	2.5		2.5	
Coat insulation		PVC		flame retardant polyethylene	
Test voltage	kV / Hz	4 / 50		4 / 50	
Rated voltage	kV	0.6/1		0.6/1	
DC-resistance	Ω/km	8.21		8.21	
Max. operating temperature	°C	-15 to +70		-15 to +90	
Min. installation temperature	°C	+5		+5	
Cu weight	kg/km	120		120	
Bus part					
Copper conductors		tinned		tinned	
Insulation of the leads		Polyethylene		Polyethylene	
Colour of the leads		neutral		neutral	
Cross-section	mm²	1.5		1.5	
Coat insulation		PVC		flame retardant polyethylene	
Test voltage	kV / Hz	4 / 50		4 / 50	
Rated voltage	V	50		50	
Max. rated current	A	3		3	
DC-resistance	Ω/km	13.7		13.7	
Capacitance	pF/m	70		70	
Attenuation at 1Hz	dB/m	1.2		1.2	
Charact. impedance at 1 MHz	nom Ω	nom. 75		nom. 75	
Cu weight	kg/km	29		29	

## Woertz Dali 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup>

Junction box with screw-type connection to flat cable No. 49945 / OS and 49946 / OS

Junction box 5-pole with Bus		Technical data			
<div>No.</div> <div>49700D</div> <div></div>	<div>Eldas-No.</div> <div>150 780 137</div>	L×W×H mm	76×41×39	Supply and branching for power current part and bus part.	
		Weight g	86	Compatible with DALI 230V	
		Fire load kWh	0.47	Plastic parts: halogen-free	
		Cross-section mm²	5×2.5+ 2×1.5	Metal parts: corrision-resistant	
		Connecting capacity Ø	3.75 + 3.2	Packing unit pce. 50	
		Rated voltage Starkstrom V	690		
		Max. rated current Starkstrom A	16		
		Rated voltage Bus part V	230		
		Degree of protection	IP20		
		<div>Attention: Not combinable with Woertz Combi.</div>			
Junction box 5-pole		Technical data			
<div>No.</div> <div>49701</div> <div></div>	<div>Eldas-No.</div> <div>150 775 037</div>	L×W×H mm	58×41×39	Supply and branching for power current part	
		Weight g	55	Plastic parts: halogen-free	
		Fire load kWh	0.33	Metal parts: corrision-resistant	
		Cross-section mm²	5×2.5		
		Connecting capacity Ø	3.75		
		Rated voltage Starkstrom V	690	Tightening torque Nm	0.7
		Max. rated current Starkstrom A	16	Cross recess no.	1
		Packing unit pce.	50		
		Degree of protection	IP20		
		Junction box for bus		Technical data	
<div>No.</div> <div>49702D</div> <div></div>	<div>Eldas-No.</div> <div>150 780 037</div>	L×W×H mm	21×41×39	Supply and branching for bus part	
		Weight g	23	Compatible with DALI 230V	
		Fire load kWh	0.14	Plastic parts: halogen-free	
		Cross-section mm²	2×1.5	Metal parts: corrision-resistant	
		Connecting capacity Ø	3.2		
		Rated voltage Bus part V	230	Tightening torque Nm	1.0
		Packing unit pce.	50	Cross recess no.	3
		Degree of protection	IP20		

Junction box, flat execution to flat cable No. 49945 and 49946

Junction box		Technical data		
<div>No. 49703</div> <div></div>	Eldas-No.	L×W×H mm	96×60×23	for supply and branching, no need to strip the insulation, flat execution 3P+N+PE
	150 701 007	Weight g	71.1	
		Fire load kWh	0.38	
		Spring clamp terminals per pole	2	for two flexible round cable of PVC up to
		Connecting capacity Ø	6-13 mm	5×1.5 mm² with end sleeves for strands or rigid
		Rated voltage V	690	round cables up to 5×2.5 mm²
		Max. rated current max. A	16	
		Cross-section mm²	(2×) 5×2.5	
		Plastic parts	halogen-free	
		Metal parts	corrosion-resistant	
	Packing unit pce.	50	Tightening torque Nm	0.7
	Degree of protection	IP20	Screwdriver No.	1

# Woertz Dali 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup>

Branching box with socket to flat cable No. 49945 / OS und 49946 / OS







Branching box 3-pole		Technical data			
No.	Eldas-No.	LxWxH mm	34.5x57.5x25.7	Lateral connection	
49713/L1	150 700 137	Weight g	40		
49713/L2	150 700 237	Fire load kWh	0.18	Plastic parts: halogen-free	
49713/L3	150 700 117	Socket	Typ GST18i3 Code 1	Metal parts: corrison-resistant	
		Rated voltage V	250	Tightening torque Nm 0.7	
		Max. rated current A	16	Cross recess no. 1	
		Packing unit pce.	50		
		Degree of protection	IP20		
		Pre-wired connectoren see page 82			

Branching box 3-pole		Technical data			
No.	Eldas-No.	LxWxH mm	48x40x34	Longitudinal connection	
49413/C	150 700 127	Weight g	55		
		Fire load kWh	0.32	Phase selection	
Socket	Typ GST18i3 Code 1	Plastic parts: halogen-free			
Rated voltage V	250	Metal parts: corrison-resistant			
Max. rated currend max. A	16	Tightening torque Nm 0.7			
Packing unit pce.	25	Cross recess no. 1			
Degree of protection	IP20				
Pre-wired connectoren see page 82					
Branching box 5-pole		Technical data			
No.		LxWxH mm	54x57.5x25.7	with socket	
49715D/L1		Weight g	65	Lateral connection	
49715D/L2		Fire load kWh	0.27		
49715D/L3		Socket	Typ GST18i5 Code 2	Plastic parts: halogen-free	
		Rated voltage V	250/400	Metal parts: corrison-resistant	
Max. rated current max. A	16	Tightening torque Nm 0.7			
Packing unit pce.	50	Cross recess no. 1			
Degree of protection	IP20				
Attention: Not compatible with with Woertz Combi.		Pre-wired connectoren see page 63			
Branching box 2-pole for bus		Technical data			
No.		LxWxH mm	27x57.5x25.7	Lateral connection	
49712		Weight g	18		
		Fire load kWh	0.12	Plastic parts: halogen-free	
Socket	Code Woertz	Metal parts: corrison-resistant			
Rated voltage V	50	Tightening torque Nm 1.0			
Max. rated current A	3	Cross recess no. 3			
Packing unit pce.	50				
Degree of protection	IP20				
Pre-wired connectoren see page 82					
Branching box 2-pole for bus		Technical data			
No.	Eldas-No.	LxWxH mm	44x39.5x28	Longitudinal connection	
49727/C	150 707 337	Weight g	19		
		Fire load kWh	0.12	Plastic parts: halogen-free	
Socket	Code Woertz	Metal parts: corrison-resistant			
Rated voltage V	50	Tightening torque Nm 1.0			
Max. rated currend max. A	3	Cross recess no. 3			
Packing unit pce.	50				
Degree of protection	IP20				
Pre-wired connectoren see page 82					



# Woertz Dali 5G2.5 mm<sup>2</sup> + 2x1.5 mm<sup>2</sup>

## Accessories


<b>Cable end piece</b>		<b>Technical Data</b>	
<b>No.</b> <b>48510/07</b>	Eldas-Nr. 120 900 607	LxWxH mm Weight g Fire load kWh Packing unit pce. Degree of protection	40x44x16 16.8 n.a. 4 IP68
		of polycarbonate, halogen-free; silicone gel  Note: Cut neatly both ends of the cable before mounting the end pieces. No need to strip the cable. Cable end piece may only be mounted once.	
<b>Cable fastening clamp</b>		<b>Technical Data</b>	
<b>No.</b> <b>49731</b>	Eldas-Nr. 120 008 107	LxWxH mm Weight g Fire load kWh Packing unit pce.	52x10x10 2 0.02 100
		of polyamide 6.6, halogen-free	
<b>Clamp for screwing on</b>		<b>Technical Data</b>	
<b>No.</b> <b>49733</b> <b>49733A</b>	Eldas-Nr. 150 900 117 150 900 107	LxWxH mm Weight g Fire load kWh Packing unit pce.	40x15x15 3.7 0.03 100
		<b>49733</b> for screwing on <b>49733A</b> for sticking on  of polyamide 6.6, halogen-free	
<b>Shears</b>		<b>Technical Data</b>	
<b>No.</b> <b>49930</b>	Eldas-Nr. 983 045 007	Weight g Packing unit pce.	223 1
		For cutting neatly and easily every type of flat cables (max. width 32mm).  With sliding anvil. Teflon coated blades.	
<b>Insulating tape</b>		<b>Technical Data</b>	
<b>No.</b> <b>49960</b>	Eldas-Nr. 171 013 004	LxWxH mm Weight g Dielectric strength max. kV/mm Temperature max. °C Packing unit pce.	102x100x2.3 33 23 +70 10
		To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.  Weatherproof, self-fusing	
<b>Slide with straight plates</b>		<b>Technical Data</b>	
<b>No.</b> <b>49738</b>	Eldas-Nr. 150 901 017	Packing unit pce.	10
		Suitable for connecting boxes for lighting installations  To fix the boxes on a surface.	

# Connectors

Connector and mains socket 5-pole		Technical data	
No. 49745M/BL		with screw-type connection, with Code 2 type GST 18i5 S S1 Z for one connection cable up to 5x2.5 mm²	
Socket 49745F/BL		Height mm	17
		Fire load kWh	0.18
		Packing unit pce.	10
Pre-wired connectors - Connector and socket free end		Technical data	
Connector - free end 5G1.5 mm²		with free end 5-pole type GST 18i5 locking possibility with flexible round cable PVC, black Lead ends compressed	
No. 49345/1M/BL 49345/2M/BL 49345/3M/BL		Height mm	17
Socket - free end 5G1.5 mm² 49345/1F/BL 49345/2F/BL 49345/3F/BL		Length m	1, 2, 3 etc.
1)*		Packing unit pce.	1
Extensions - Connector and socket 5-pole		Technical data	
Connector - Socket 5G1.5 mm²	<i>different lengths and colours on request</i> 	Type GST 18i5 verriegelbar with flexible round cable PVC, black Lead ends compressed	
No. 49345/1MF/BL 49345/2MF/BL 49345/3MF/BL		Height mm	17
		Length m	1, 2, 3 etc.
1)*		Packing unit pce.	1
Pre-wired connectoren PVC - Connector and Socket free end		Technical data	
Connector - free end 5G1.5 mm²		with free end 5-pole type GST 18i5 locking possibility with flexible round cable HF, black Lead ends compressed	
No. 49745/1M/BL 49745/2M/BL 49745/3M/BL		Height mm	17
Socket - free end 5G1.5 mm² 49745/1F/BL 49745/2F/BL 49745/3F/BL		Length m	1, 2, 3 etc.
1)*		Packing unit pce.	1
Extensions - Connector and socket 5-pole		Technical data	
Connector - Socket 5G1.5 mm²	<i>different lengths and colours on request</i> 	Type GST 18i5 verriegelbar with flexible round cable HF, black Lead ends compressed	
No. 49745/1MF/BL 49745/2MF/BL 49745/3MF/BL		Height mm	17
		Length m	1, 2, 3 etc.
1)*		Packing unit pce.	1

1)\* Different lengths and diameters on request.

# Woertz 5G4 mm<sup>2</sup>

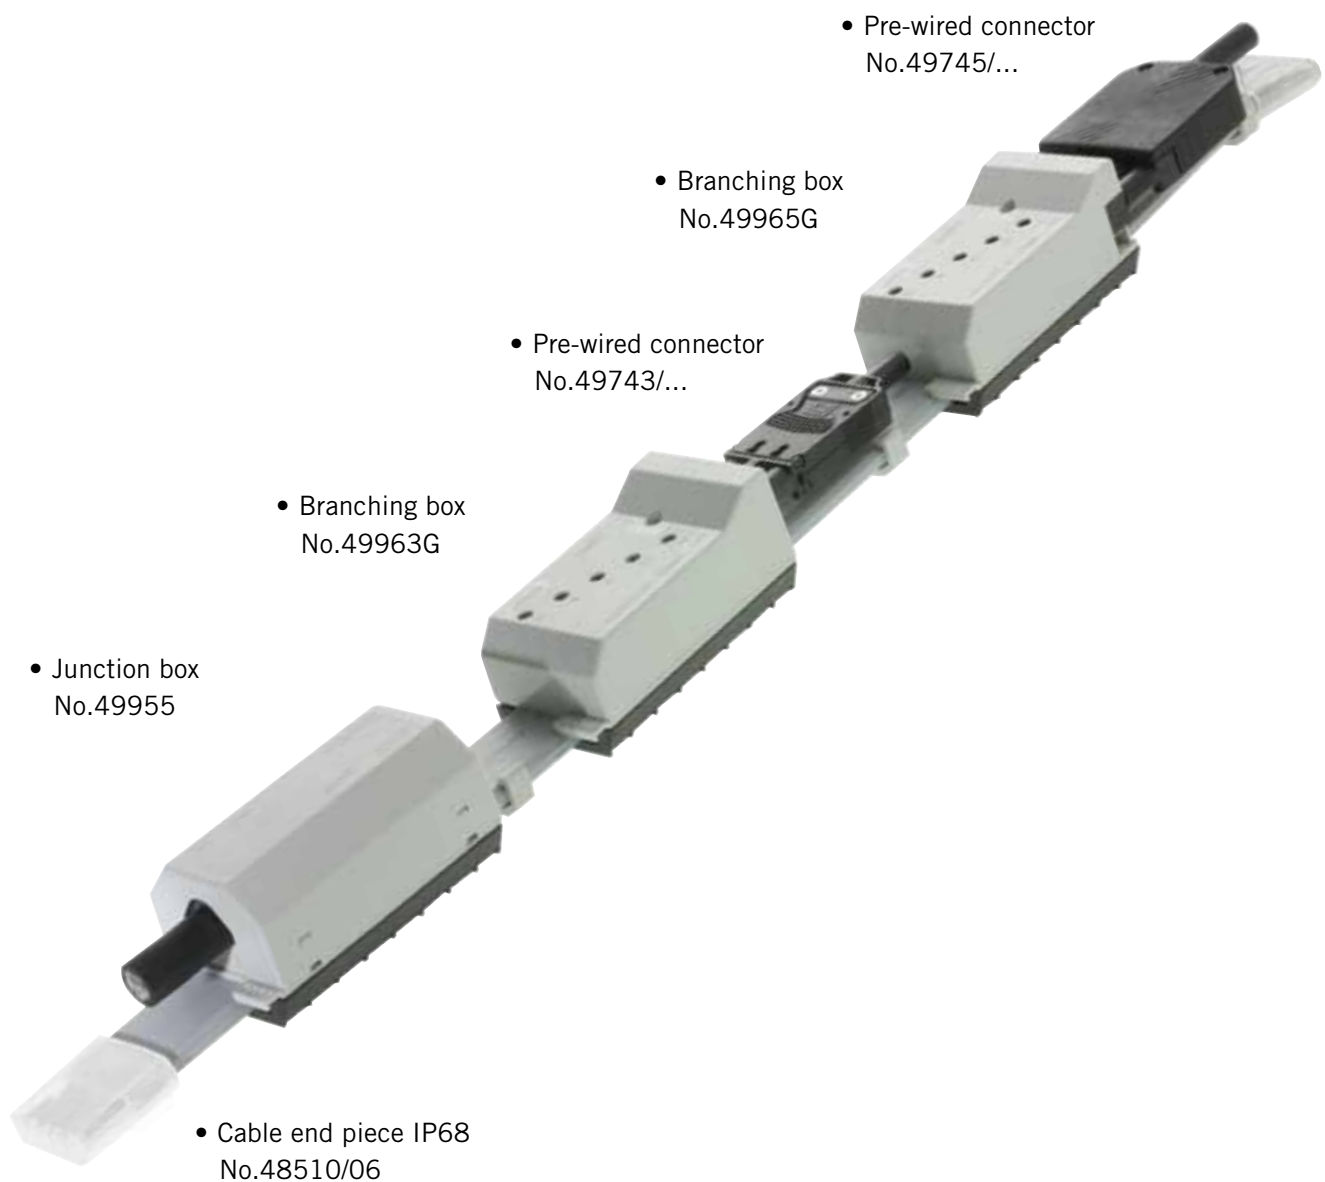

## Where are these flat cables used?

- in long corridors and spacious offices
- in supermarkets
- for the lighting of railway stations, car parks or halls
- for light industry

# Woertz 5G4 mm<sup>2</sup>

Flachkabel 5G4 mm<sup>2</sup>



3L+N+PE

## PVC

No.

Eldas-No.

■ 49404

113 284 480

## halogen-free

No.

Eldas-No.

■ 49405

113 294 480

more colours on request

## Technical data


Dimensionen	mm	26.6×6.7	26.6×6.7
Weight	g/m	410	410
Fire load	kWh/m	1.298	1.82
No. of leads x cross-section	mm <sup>2</sup>	5×4	5×4

## High current part



Copper conductors		tinned, finely stranded	tinned, finely stranded
Insulation of the leads		PVC	flame retardant polyethylene
Colour of the leads		grey, black, green/yellow, blue, brown	grey, black, green/yellow, blue, brown
Cross-section	mm <sup>2</sup>	4	4
Coat insulation		PVC	flame retardant polyethylene
Test voltage	kV / Hz	4 / 50	4 / 50
Rated voltage	kV	0.6/1	0.6/1
DC-resistance	Ω/km	5.09	5.09
Max. operating temperature	°C	-15 to +70	-15 to +90
Min. Installation temperature	°C	+5	+5
Cu weight	kg/km	192	192

## Woertz 5G4 mm<sup>2</sup>

Junction box for power current to flat cable No. 49404 and 49405


Junction box		Technical data			
No.	Eldas-No.	L×W×H mm	95×49×44	for supply and branching	
49955	150 724 037	Weight g	122.5	Plastic parts	halogen-free
		Fire load kWh	0.56	Metal parts	corrosion-resistant
		Rated voltage V	690		
		Max. rated current max. A	25	Tightening torque Nm	0.7
		Packing unit pce.	50	Cross recess no.	1
		Degree of protection	IP20	(for pointed and clamping screws)	

Branching boxes without wire stripping to flat cable No. 49404 and 49405

Box with socket 3-pole		Technical data	
No.	Eldas-No.	L×W×H mm	112×49×43
49963G	150 721 007	Weight g	133
		Fire load kWh	0.57
		Socket	Typ GST18i3 Code 1
		Rated voltage V	250/400
		Max. rated current max. A	16
		Packing unit pce.	50
		Degree of protection	IP20
		with socket 3-pole	
		longitudinal connection	
		Plastic parts	halogen-free
		Metal parts	corrosion-resistant
		Tightening torque Nm	0.7
		Cross recess no.	1
		(for pointed and clamping screws)	
		Pre-wired connectors see page 82	
Box with socket 5-pole		Technical data	
No.	Eldas-No.	L×W×H mm	112×49×43
49965G	150 721 017	Weight g	143
		Fire load kWh	0.58
		Socket	Typ GST18i5 Code 1
		Rated voltage V	250/400
		Max. rated current max. A	16
		Packing unit pce.	50
		Degree of protection	IP20
		with socket 5-pole	
		longitudinal connection	
		Plastic parts	halogen-free
		Metal parts	corrosion-resistant
		Tightening torque Nm	0.7
		Cross recess no.	1
		(for pointed and clamping screws)	
		Pre-wired connectors see page 82	



## Accessories

Cable end piece		Technical data		
No. <b>48510/06</b>		LxWxH mm	35x31x22	of polycarbonate, halogen-free; silicone gel
		Weight g	14.3	
		Fire load kWh	0.06	Note: Cut neatly both ends of the cable before mounting the end pieces. No need to strip the cable. Cable end piece may only be mounted once
		Packing unit pce.	10	
		Degree of protection	IP68	
Clamp for screwing on		Technical data		
No. <b>49981</b>	Eldas-No. 120 009 007	LxWxH mm	32x15x8	for cable fastening
		Weight g	1.5	
		Fire load kWh	0.01	of polyamide 6.6, halogen-free
		Packing unit pce.	500	
Shears		Technical data		
No. <b>49930</b>	Eldas-No. 983 045 037	Weight g	223	For cutting neatly and easily every type of flat cables (max. width 32mm).
		Packing unit pce.	1	
Insulating tape		Technical data		
No. <b>49632</b>	Eldas-No. 150 901 147	LxWxH mmxm	50x1	To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.
		Weight g	50.1	
		Dielectric strength max. kV/mm	18	
		Temperature max.	+70 °C	
		Packing unit m	1	Weatherproof, self-fusing.

# Woertz 7G2.5 mm<sup>2</sup> and Woertz 7G4 mm<sup>2</sup>

The advantage of a higher protection degree and a wider field of application.



- Clamp  
No. 49731

- Connector 7-pole  
No. 49626

- Junction box 7-pole  
No. 49613




- Cable end piece IP65  
No. 49620

## Where are these flat cables used?

- for the industrial automation
- 5 conductors for supply voltage 3L+N+PE and 2 conductors for low voltage 24V/48V or control voltage 230VAC.

## Woertz 7G2.5 mm<sup>2</sup>

### Flachkabel 7G2.5 mm<sup>2</sup>

PVC		halogen-free	
No.	Eldas-No.	No.	Eldas-No.
  <b>49600</b>	113 288 780	 <b>49601</b>	113 298 780
5L+N+PE		more colours on request	

#### Technical data

Dimensionen	mm	35x6	35x6
Weight	g/m	402	401
Fire load	kWh/m	1.31	2.02
No. of leads x cross-section	mm <sup>2</sup>	7x2.5	7x2.5

#### High current part

Copper conductors	tinned, finely stranded	tinned, finely stranded
Insulation of the leads	PVC	flame retardant polyethylene
Colour of the leads	brown/black/grey/blue/green-yellow/red/white	brown/black/grey/blue/green-yellow/red/white
Cross-section	mm <sup>2</sup> 2.5	2.5
Coat insulation	PVC oil resistant	flame retardant polyethylene
Test voltage	kV / Hz 4 / 50	4 / 50
Rated voltage	kV 0.6/1	0.6/1
DC-resistance	Ω/km 8.21	8.21
Max. operating temperature	°C -15 to +90	-15 to +90
Min. installation temperature	°C +5	+5
Cu weight	kg/km 168	168

## Woertz 7G4 mm<sup>2</sup>

### Flat cable 7G4 mm<sup>2</sup>

PVC		halogen-free	
No.	Eldas-No.	No.	Eldas-No.
 		 <b>49401</b>	
5L+N+PE		more colours on request	

#### Technical data


Dimensionen	mm	35x6
Weight	g/m	491
Fire load	kWh/m	1.98
No. of leads x cross-section	mm <sup>2</sup>	7x4

#### High current part



Copper conductors	tinned, highly flexible
Insulation of the leads	flame retardant polyethylene
Colour of the leads	brown/black/grey/blue/green-yellow/red/white
Cross-section	mm <sup>2</sup> 4
Coat insulation	flame retardant polyethylene
Test voltage	kV / Hz 4 / 50
Rated voltage	kV 0.6/1
DC-resistance	Ω/km 5.09
Max. operating temperature	°C -15 to +90
Min. installation temperature	°C +5
Cu weight	kg/km 270

## Woertz 7G2.5 mm<sup>2</sup> and 7G4 mm<sup>2</sup>

Junction box to flat cable No. 49600, 49601 and 49401

Junction box 7-pole		Technical data			
No.	Eldas-No.	LxWxH mm	172x57x60	for supply and branching without wire stripping with 1 outlet M25x1.5	
49613	150 077 037	Weight g	350		
		Fire load kWh	1.68		
		Connecting capacity mm	2.8x3.8	Tightening torque Nm	0.7
		Rated voltage V	690	Cross recess no.	1
		Max. rated current max. A	16	(for pointed and clamping screws)	
		Plastic parts	halogen-free		
		Metal parts	corrosion-resistant	Degree of protection	IP65
		Packing unit pce.	5		

Connecting base and connector to flat cable No. 49600, 49601 and 49401

Connecting base		Technical data		
<div>No. 49611</div> <div>Eldas-No. 150 077 437</div> <div></div>	LxWxH mm	135x57x53	to Connector No. 49626	
	Weight g	200		
	Fire load kWh	0.83		
	Rated voltage V	690		
	Max. rated current max. A	16		
	Plastic parts	halogen-free		
	Metal parts	corrosion-resistant	Tightening torque Nm	0.7
	Packing unit pce.	5	Cross recess no.	1
	Degree of protection	IP65		
Connector 7-pole		Technical data		
<div>No. 49626</div> <div>Eldas-No. 150 977 437</div> <div></div>	LxWxH mm	83x56x73	with 1 outlet M25x1.5 to connecting base No. 49611	
	Weight g	160		
	Fire load kWh	0.47		
	Rated voltage V	250/400		
	Max. rated current max. A	16		
	Plastic parts	halogen-free		
	Metal parts	corrosion-resistant		
	Packing unit pce.	5		
	Degree of protection	IP65		

**Cable gland (to be ordered separately)**

see page 80



# Woertz 7G2.5 mm<sup>2</sup> and 7G4 mm<sup>2</sup>

## Accessories

Cable end piece		Technical data	
<b>No.</b> <b>49620</b>	Eldas-No. 150 901 137	LxWxH mm 62x23x53 Weight g 32 Fire load kWh 0.22 Packing unit pce. 10	of polycarbonate, halogen-free  Before mounting the cable, first strip it at both ends for a distance of 19 mm so that the specified creepage distance will be observed.
		Degree of protection IP65	
Clamp		Technical data	
<b>No.</b> <b>49731</b>	Eldas-No. 120 008 107	LxWxH mm 52x10x10 Weight g 2 Fire load kWh 0.02 Packing unit pce. 100	for cable fastening  of polyamide 6.6, halogen-free
			
Cable stripping tool		Technical data	
<b>No.</b> <b>49623</b>	Eldas-No. 983 053 107	Weight g 273 Packing unit pce. 1	This tool offers the advantage of stripping neatly and easily the cable without damaging the insulation of the conductors.  Note: The cable has to be stripped at both ends for a distance of 19mm so that the conductors can be inserted properly in the end pieces.
			
Shears		Technical data	
<b>No.</b> <b>49930</b>	Eldas-No. 983 045 007	Weight g 223 Packing unit pce. 1	For cutting neatly and easily every type of flat cables (max. width 32mm).
			
Insulating tape		Technical data	
<b>No.</b> <b>49632</b>	Eldas-No. 150 901 147	LxWxH mmxm 50x1 Weight g 50.1 Dielectric strength max. kV/mm 18 Temperature max. +70 °C Packing unit m 1	To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.  Weatherproof, self-fusing
			
Protection cover		Technical data	
<b>No.</b> <b>49627</b>	Eldas-No. 150 900 907	Weight g 15.5 Fire load kWh 0.16 Packing unit pce. 5	Cover IP65 to Connecting base No. 49611  halogen-free
			



# Woertz power 5G10 mm<sup>2</sup>

When you need more power.






## Where are these flat cables used?

- For the lighting of halls
- For the supply of loads in open-plan offices through round or flat cables
- In data processing centers
- In hotels/restaurants
- In shopping centers
- In hospitals, clinics, residential facilities

## Woertz power 5G10 mm<sup>2</sup>

Flat cable 5G10 mm<sup>2</sup>



	PVC		halogen-free	
	No.	Eldas-No.	No.	Eldas-No.
	 <b>49884</b>	113 289 518	 <b>49885</b>	113 389 504
	more colours on request			

3 L+N+PE

Technical data				
Dimension	mm	38.5×10		38.5×10
Weight	g/m	845		845
Fire load	kWh/m	2.12		3.43
No. of leads x cross-section	mm <sup>2</sup>	5×10		5×10
High current part				
Copper conductors		bare, highly flexible		bare, highly flexible
Insulation of the leads		PVC		flame retardant polyethylene
Colour of the leads		brown, blue, green/yellow, black, grey		brown, blue, green/yellow, black, grey
Cross-section	mm <sup>2</sup>	10		10
Coat insulation		PVC		flame retardant polyethylene
Test voltage	kV / Hz	4 / 50		4 / 50
Rated voltage	kV	0.6/1		0.6/1
DC-resistance	Ω/km	1.91		1.91
Max. operating temperature	°C	-15 to +70		-15 to +90
Min. installation temperature	°C	+5		+5
Cu weight	kg/km	480		480

# Woertz power 5G10 mm<sup>2</sup>

Junction-/branching box to flat cable No. 49884 and 49885

Junction box		Technical data	
<div>No. 49971</div> <div>Eldas-No. 150 724 047</div> <div></div>	L×W×H mm	160×90×55	for the supply at the end of the cable
	Weight g	556	
	Fire load kWh	1.20	
	Connecting capacity mm	5.2×9	
	Rated voltage V	750	
	Max. rated current max. A	57	
	Plastic parts	halogen-free	
	Metal parts	corrosion-resistant	
	Packing unit pce.	2	
	Degree of protection	IP20	
	Branching box		
<div>No. 49970</div> <div>Eldas-No. 150 705 337</div> <div></div>	L×W×H mm	110×51×48	for 5×4 mm <sup>2</sup> round cables, without wire stripping
	Weight g	156	
	Fire load kWh	0.62	
	Connecting capacity mm	3.9×3.4	
	Rated voltage V	690	
	Max. rated current max. A	25	
	Plastic parts	halogen-free	
	Metal parts	corrosion-resistant	
	Packing unit pce.	25	
	Degree of protection	IP20	
		Screwdriver No.	2

## Accessories

<b>Cable end piece</b>		<b>Technical data</b>	
No. 49972	Eldas-No. 120 900 007	LxWxH mm Weight g Fire load kWh Packing unit pce.	47x40x17 11.5 0.10 10
		Before mounting the cable, first strip it at both ends for a distance of 19mm so that the specified creepage distance will be observed.	
<b>Set of two clamps</b>		<b>Technical data</b>	
No. 49977	Eldas-No. 120 000 007	LxWxH mm (one half) Weight g Fire load kWh Ø fixing holes mm Distance between fixing holes mm Packing unit pce.	56x15x12 6.5 0.04 4.5 47 100
		for screwing on - To fix the cable  of polyamide 6.6, halogen-free  2 clamps pro fastening point	
<b>Cable stripping tool</b>		<b>Technical data</b>	
No. 49976	Eldas-No. 983 050 727	Weight g Packing unit pce.	60.5 1
		The cable stripping tool allows the sheath to be split up on the narrow sides of the cable. Both sheath parts may then be cut by means of the shears.  Note: The cable has to be stripped at both ends for a distance of 20mm so that the conductors can be inserted properly in the end pieces.	
<b>Shears</b>		<b>Technical data</b>	
No. 49929	Eldas-No. 983 045 037	Weight g Packing unit pce.	582 1
		For cutting neatly and easily every type of flat cables (max. width 32mm).	
<b>Insulating tape</b>		<b>Technical data</b>	
No. 49632	Eldas-No. 150 901 147	LxWxH mmxm Weight g Dielectric strength max. kV/mm Temperature max. °C Packing unit pce.	50x1 50.1 18 +70 1
		To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.  Weatherproof, self-fusing	

# Woertz 5G16 mm<sup>2</sup> (IP65)

Efficient cabling for both power supply and distribution and also for feeding distribution boxes.

- Cable end piece  
No. 49630 - IP65

- Clamp  
No. 49634

- Junction box  
No. 49615

## Where are these flat cable used?

- As flexible power rails for the supply of machinery
- As rising mains
- For the supply of distribution blocks
- For exhibitions and trade fairs
- For temporary installations on building sites
- For the lighting of tunnels
- For the shipbuilding
- For the lighting of halls
- For the supply of open-spaces (flat cable or round cable for feeding the receivers)
- Socket circuits with decentralised protection



# Woertz 5G16 mm<sup>2</sup>

Flat cable 5G16 mm<sup>2</sup>






3 L+N+PE

more colours on request

		PVC	halogen-free
		No.	No.
		Eldas-No.	Eldas-No.
		■ 49605	■ 49606
		113 289 680	113 299 680
Technical data			
Dimension	mm	48.5×11.3	48.5×11.3
Weight	g/m	1300	1300
Fire load	kWh/m	2.95	4.96
No. of leads x cross-section	mm <sup>2</sup>	5×16	5×16
High current part			
Copper conductors		bare, highly flexible	bare, highly flexible
Insulation of the leads		PVC	flame retardant polyethylene
Colour of the leads		brown, blue, green/yellow, black, grey	brown, blue, green/yellow, black, grey
Cross-section	mm <sup>2</sup>	16	16
Coat insulation		PVC oil resistant	flame retardant polyethylene
Test voltage	kV / Hz	4 / 50	4 / 50
Rated voltage	kV	0.6/1	0.6/1
DC-resistance	Ω/km	1.21	1.21
Max. operating temperature	°C	-15 to +90	-15 to +90
Min. Installation temperature	°C	+5	+5
Cu weight	kg/km	768	768

# Woertz 5G16 mm<sup>2</sup>

Junction box und Branching box zu Flachkabel Art. Nr. 49605 und 49606

Junction box		Technical data	
No. <b>49615</b>	Eldas-No. 150 285 037	LxWxH mm 200x85x91	Junction box 5x16 mm <sup>2</sup>
		Weight g 800	with 1 outlet M40x1.5 for 1 Zuleitung with round cable 5x16 mm <sup>2</sup>
		Fire load kWh 3.30	
		Rated Cross-section mm <sup>2</sup> 16	
		Rated voltage V 690	Tightening torque Nm (Pointed screws) 3.5
		Max. rated current max. A 63	screwdriver No. 2
		Plastic parts halogen-free	Tightening torque Nm (Clamping screws) 2
		Metal parts corrosion-resistant	screwdriver No. 2
		Packing unit pce. 1	
		Degree of protection IP65	
Branching box		Technical data	
No. <b>49616</b>	Eldas-No. 150 713 037	LxWxH mm 200x85x73	branching box 5x10 mm <sup>2</sup> with 2 outlets M25x1.5
		Weight g 650	for max. 1 round cable 5x10 mm <sup>2</sup> or 2 round cable 5x6 mm <sup>2</sup>
		Fire load kWh 2.97	
		Rated Cross-section mm <sup>2</sup> 16	
		Rated voltage V 690	Tightening torque Nm (Pointed screws) 3.5
		Max. rated current max. A 63	Screwdriver No. 2
		Plastic parts halogen-free	Tightening torque Nm (Clamping screws) 2
		Metal parts corrosion-resistant	Screwdriver No. 2
		Packing unit pce. 1	Cross recess no. 2
		Degree of protection IP65	
mit Schieber aus Aluminium			
No. <b>49615A</b> <b>49616A</b>			
Cable glands (see page 80)			
			

# Woertz 5G16 mm<sup>2</sup>

## Accessories

Cable end piece		Technical data	
	No.	Eldas-No.	LxWxH mm
	49630	150 901 127	80x30x57
			Weight g
			44
			Fire load kWh
		0.31	
		Packing unit pce.	
		4	
		Degree of protection	
		IP65	
Clamp		Technical data	
	No.	Eldas-No.	Dimension mm
	49634	120 018 017	10x77x1
			Weight g
			7
		Packing unit pce.	
		100	
Cable stripping tool		Technical data	
	No.	Eldas-No.	Weight g
	49633	983 053 057	59
			Packing unit pce.
		1	
		The cable stripping tool allows the sheath to be split up on the narrow sides of the cable. Both sheath parts may then be cut by means of the shears.	
		Note: The cable has to be stripped at both ends for a distance of 25mm so that the conductors can be inserted properly in the end pieces.	
Shears		Technical data	
	No.	Eldas-No.	Weight g
	49929	983 045 037	582
			Packing unit pce.
		1	
		For cutting neatly and easily every type of flat cables (max. width 50mm).	
Insulating tape		Technical data	
	No.	Eldas-No.	Dimension mmxm
	49632	150 901 147	50x1
			Weight g
			50.1
			Dielectric strength max. kV/mm
			18
		Temperatur max.	
		+70 °C	
		Packing unit pce. m	
		1	
		To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.	
		Weatherproof, self-fusing	

## Woertz 5G16 mm<sup>2</sup>


### Cable glands

Cable glands		Technical data		
<b>No.</b> <b>49628</b>	Eldas-No. 121 730 607	Weight g M25×1.5 Ø Diameter of cables mm Packing unit pce.	23.3 9.0-16.0 5	of polyamide delivered with O-ring seal of NBR, Ø 22×2 mm
				
Cable glands		Technical data		
<b>No.</b> <b>49629</b>	Eldas-No. 121 730 617	Weight g M25×1.5 Ø Diameter of cables mm Packing unit pce.	22.6 13.0-18.0 5	of polyamide delivered with O-ring seal of NBR, Ø 22×2 mm halogen-free
				
Cable glands		Technical data		
<b>No.</b> <b>49635</b>	Eldas-No. 121 720 807	Weight g M40×1.5 Ø Diameter of cables mm Packing unit pce.	76.4 20.0-26.0 5	Of plastic material delivered with O-ring seal of NBR
				
Cable glands		Technical data		
<b>No.</b> <b>49637</b>	Eldas-No. 121 100 607	Weight g M25×1.5 Ø Diameter of cables mm Packing unit pce.	56.2 11.0-20.5 5	Of nickel-plated brass delivered with O-ring seal of NBR, Ø 22×2 mm corrosion-resistant
				
Blind plug		Technical data		
<b>No.</b> <b>49639</b>	Eldas-No. 126 227 014	Weight g M25×1.5 Packing unit pce.	7.9 5	Of plastic material delivered with O-ring halogen-free
				


## Mounting procedure of Junction box No. 49615




Open the baseplate. Insert the flat cable between box and baseplate.




Fold the baseplate back and tighten up both fastening screws.

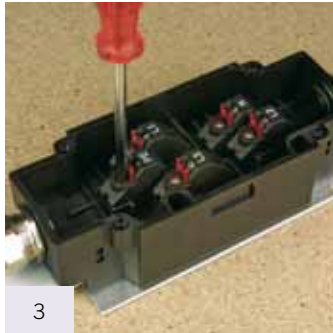

Turn in the pointed screws...

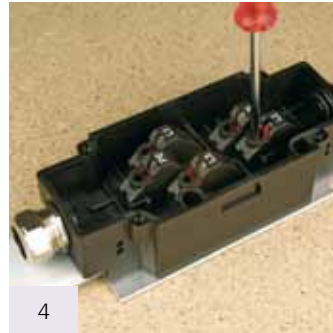


... until the red indicators are recessed.



Connect the round cable leads to the connecting terminals.

Mounting can also be performed in a different order: 5, 1, 2, 3, 4, 6.



Place the cover and tighten up the screws.

### Possibility of pre-wiring:






#### Service to our customers.

On request, the connectors may be provided in advance with round outgoing cables.



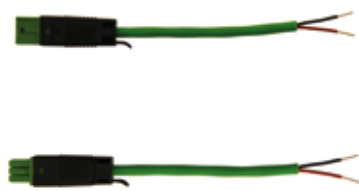

For temporary installations, distribution blocks, cabins and machines for example, prewiring may be performed beforehand in our workshops (fig. 4). On the mounting site, there is no need to cut cables. The connection to the flat cable will be done in a matter of seconds, just using a screwdriver! Important time savings will thus be performed - to your advantage!










# Connectors

Connector and socket KNX 2-pole		Technical data
<b>No.</b> <b>connector</b> <b>49740M</b> type BST 14i2 F S1 Z  <b>socket</b> <b>49740F</b> type BST 14i2 F B1 Z	Eldas-No. 157 800 288  150 901 127	 <p>with spring connection, with code KNX. to single-wire and highly flexible leads 0.25-0.75 mm<sup>2</sup> with strain relief and locking, to leads ø 5-7mm.</p> <p>Height mm 14.4 Fire load kWh 0.04 Packing unit pce. 50</p>
Snap-in KNX 2-pole		Technical data
<b>No.</b> <b>49420M</b> Typ BST 14i2  <b>49420F</b> Typ BST 14i2	(see picture)  	<p>with spring connection, with code KNX. to single-wire and highly flexible leads 0.25-0.75 mm<sup>2</sup>, with locking.</p> <p>Dimensions LxWxH mm 23.5x19.5x29.5 Mounting opening: mm 17.8x17.8 Sheet thickness mm 0.5-2.5 Fire load kWh 0.04 Packing unit pce. 25</p>
Pre-wired connectoren halogen-free		Technical data
<b>No.</b> <b>49340/1M</b> <b>49340/2M</b> <b>49340/3M</b>  <b>49340/1F</b> <b>49340/2F</b> <b>49340/3F</b> <b>49340/...</b> <i>different lenghts on request</i>	Eldas-No. 157 881 187 157 881 287 157 881 387  	<p>Connector with one free cable end, 2-pole type BST 14i2 KF-S, code KNX with flexible round cable 2x0.5 mm<sup>2</sup>, green HF</p> <p>Stripping length of sheath mm 20 Stripping length of insulation mm 8 Height mm 14.4 Length m 1, 2, 3 etc. Packing unit pce. 1</p>
Connector and bus socket 2-pole		Technical data
<b>No.</b> <b>Stecker</b> <b>49747M</b>  <b>Socket</b> <b>49747F</b>		<p>with spring connection, with code Woertz (incompatible with code KNX) to single-wire and highly flexible leads 0.25-0.75mm<sup>2</sup> with strain relief and locking to leads ø 5-7mm.</p> <p>Height mm 14.4 Fire load kWh 0.04 Packing unit pce. 50</p>
Snap-in Bus 2-pole		Technical data
<b>No.</b> <b>49421M</b>  <b>49421F</b>	(see picture)  	<p>with spring connection, with code Woertz (incompatible with code KNX) to single-wire and highly flexible leads 0.25-0.75 mm<sup>2</sup>, with locking.</p> <p>Dimensions LxWxH mm 23.5x19.5x29.5 Mounting opening mm 17.8x17.8 Sheet thickness mm 0.5-2.5 Fire load kWh 0.04 Packing unit pce. 25</p>



Pre-wired connectoren halogen-free		Technical data
<b>No.</b> <b>49347/1M</b> <b>49347/2M</b> <b>49347/3M</b>  <b>49347/1F</b> <b>49347/2F</b> <b>49347/3F</b> <b>49347/...</b> <i>different lengths on request</i>		Connector with one free cable end 2-pole (shield not connected) code Woertz with flexible round cable 2x0.5 mm <sup>2</sup> , grey stripping length of sheath mm 20 stripping length of insulation mm 8 Height mm 14.4 Length m 1, 2, 3 etc. Packing unit pce. 1
Connector and bus socket 2-pole		Technical data
<b>No.</b> <b>Connector</b> <b>49741M</b> Typ BST 14i3 F S1 Z  <b>Socket</b> <b>49741F</b> Typ BST 14i3 F B1 Z	Eldas-No. 157 804 218 	with spring connection, with code 3 (incompatible with code KNX). to single-wire and highly flexible leads 0.25-0.75mm <sup>2</sup> with strain relief and locking to leads ø 5-7mm. Height mm 14.4 Fire load kWh 0.04 Packing unit pce. 50
Pre-wired connectoren halogen-free		Technical data
<b>No.</b> <b>49341/1M</b> <b>49341/2M</b> <b>49341/3M</b>  <b>49341/1F</b> <b>49341/2F</b> <b>49341/3F</b> <b>49341/...</b> <i>different lengths on request</i>		Connector with one free cable end 2-pole (shield not connected) type BST 14i3 F S1 Z, code 3 with flexible round cable 2x0.5 mm <sup>2</sup> , grey OH stripping length of sheath mm 20 stripping length of insulation mm 8 Height mm 14.4 Length m 1, 2, 3 uws. Packing unit pce. 1
Mains connector 3-pole		Technical data
<b>No.</b> <b>49743/M/BR</b>	Eldas-No. 157 800 328 	with screw-type connection, black/brown, with code 4 (brown) type GST 18i3 S S1 Z to single-wire and highly flexible leads 1.5-2.5 mm <sup>2</sup> with cord-grip ø 8-11 mm. Height mm 25 Fire load kWh 0.18 Packing unit pce. 10

Pre-wired connectoren Halogen-free		Technical data
<b>No.</b> <b>49343/1M/BR</b> <b>49343/2M/BR</b> <b>49343/3M/BR</b>  <b>1)*</b>		connector with free cable end 3-pole P+N+PE type GST 18i3 S S1 Z, code 4 (brown) locking possibility with flexible round cable 3G1.5 mm², HF, black  Height mm 25 Length m 1, 2, 3 uws. Packing unit pce. 1
Pre-wired connectoren PVC		Technical data
<b>No.</b> <b>49743/1M/BR</b> <b>49743/2M/BR</b> <b>49743/3M/BR</b>  <b>1)*</b>		connector with free cable end 3-pole P+N+PE type GST 18i3 S S1 Z, code 4 (brown) locking possibility with flexible round cable 3G1.5 mm², PVC, black  Height mm 25 Length m 1, 2, 3 uws. Packing unit pce. 1
Locking		Technical data
<b>No.</b> <b>49750</b>	Eldas-No. 150 900 118  	Mechanical link between box and connector  Length mm 37.5 Packing unit pce. 10
Distributor block		
<b>No.</b> <b>49782/2SF2P</b> 2-pole, KNX, 2 Outputs F, 1 Input M <b>49783/2SF3P</b> 3-pole, GST, 2 Outputs F, 1 Input M <b>49783/3SF3P</b> 3-pole, GST, 3 Outputs F, 1 Input M <b>49783/5SF3P</b> 3-pole, GST, 5 Outputs F, 1 Input M <b>49785/1SFL1</b> 5-pole, 1 Output F 5P, 1 1 Output F 3PL1 <b>49785/1SFL2</b> 5-pole, 1 Output F 5P, 1 1 Output F 3PL2 <b>49785/1SFL3</b> 5-pole, 1 Output F 5P, 1 1 Output F 3PL3 <b>49785/2SF5P</b> 5-pole, GST, 2 Outputs F, 1 Input M <b>49785/2SF5P/BL</b> 5-pole, GST, 2 Outputs F, 1 Input M/BL <b>49785/3SF5P</b> 5-pole, GST, 3 Outputs F, 1 Input M <b>49745/Linect</b> 5-pole, GST, 1 Input BL, 1 Output BL		
<b>1)* Different lengths and diameters on request.</b>		

Stecker und Socket Netz 3-pole		Technical data	
No. 49743M	Eldas-No. 157 800 318		with screw-type connection, with code 1 type GST 18i3 S S1 Z for one connection cable up to 3x1.5 mm <sup>2</sup>
Socket 49743F			Height mm 13 Fire load kWh 0.11
			Packing unit pce. 10
Pre-wired connectoren Halogen-free - Stecker und Socket freies Ende		Technical data	
<u>Stecker - freies Ende 3G1.5 mm<sup>2</sup></u>			with free end 5-pole type GST 18i3 locking possibility with flexible round cable HF, black Lead ends compressed
No. 49343/1M 49343/2M 49343/3M			Height mm 13
<u>Socket - freies Ende 3G1.5 mm<sup>2</sup></u> 49343/1F 49343/2F 49343/3F 1)*			Length m 1, 2, 3 uws. Packing unit pce. 1
Pre-wired connectoren PVC - Stecker und Socket freies Ende		Technical data	
<u>Stecker - freies Ende 3G1.5 mm<sup>2</sup></u>			with free end 5-pole type GST 18i3 locking possibility with flexible round cable PVC, black Lead ends compressed
No. 49743/1M 49743/2M 49743/3M			Height mm 13
<u>Socket - freies Ende 3G1.5 mm<sup>2</sup></u> 49743/1F 49743/2F 49743/3F 1)*			Length m 1, 2, 3 uws. Packing unit pce. 1
Verbindungsleitungen Halogen-free - Stecker und Socket 3-pole		Technical data	
<u>Stecker - Socket 3G1.5 mm<sup>2</sup></u>			type GST 18i3 with locking with flexible round cable HF, black
No. 49343/1MF 49343/2MF 49343/3MF			Height mm 13
1)*			Length m 1, 2, 3 uws. Packing unit pce. 1
Verbindungsleitungen PVC - Stecker und Socket 3-pole		Technical data	
<u>Stecker - Socket 3G1.5 mm<sup>2</sup></u>			type GST 18i5 with locking with flexible round cable PVC, black
No. 49743/1MF 49743/2MF 49743/3MF			Height mm 17
1)*			Length m 1, 2, 3 uws. Packing unit pce. 1

1)\* Different lengths and diameters on request.

# Connectors

<b>Connector and mains socket 3-pole</b>			<b>Technical data</b>
No. 49745M	Eldas-No. 157 800 518		with screw-type connection, with code 1 type GST 18i3 S S1 Z for one connection cable up to 3x2.5 mm² Lead ends compressed
Socket 49745F			Height mm17 Fire load kWh0.18 Packing unit pce.10
<b>Pre-wired connectoren halogen-free - Connector and socket free end</b>			<b>Technical data</b>
<b>Connector - free end 5G1.5 mm²</b>			with free end 3-pole type GST 18i3 locking possibility with flexible round cable HF, black Lead ends compressed
Art.-Nr. 49345/1M 49345/2M 49345/3M			Height mm17 Length m1, 2, 3 etc.
<b>Socket - free end 5G1.5 mm²</b>			Packing unit pce.1
49345/1F 49345/2F 49345/3F 1)*			
<b>Pre-wired connectoren - PVC connector and socket free end</b>			<b>Technical data</b>
<b>Connector - free end 5G1.5 mm²</b>			with free end 5-pole type GST 18i5 locking possibility with flexible round cable PVC, black Lead ends compressed
No. 49745/1M 49745/2M 49745/3M			Height mm13 Length m1, 2, 3 etc.
<b>Socket - free end 5G1.5 mm²</b>			Packing unit pce.1
49745/1F 49745/2F 49745/3F 1)*			
<b>Verbindungsleitungen - Halogen-free connector und socket 5-pole</b>			<b>Technical data</b>
<b>Connector - Socket 5G1.5 mm²</b>			type GST 18i5with locking with flexible round cable HF, black
No. 49345/1MF 49345/2MF 49345/3MF			Height mm13 Length m1, 2, 3 etc.
<b>1)*</b>			Packing unit pce.1
<b>Extensions PVC - Connector and socket 5-pole</b>			<b>Technical data</b>
<b>Connctor - Socket 5G1.5 mm²</b>			type GST 18i5with locking with flexible round cable PVC, black
No. 49745/1MF 49745/2MF 49745/3MF			Height mm13 Length m1, 2, 3 etc.
<b>1)*</b>			Packing unit pce.1

1)\* Different lengths and diameters on request.

# Accessories

Torque screwdriver 0.6–2.0 Nm		Technical data
No. <b>49825</b>	Application: For controlled tightening of screws in areas containing live parts up to 1,000 V AC, to be used only in combination with a slim-Torque VDE bit holder for 6mm slimBits.	Grip: Torque is infinitely variable with torque setter adjusting tool (included in the delivery). Ergonomic multi-component grip, protective insulation 1,000 V AC, tested for safety by the German TÜV (Technical Inspection Association). Grip size adjusted optimally to torque area. A click signals that the preset torque value has been reached.  Standards: Manufactured in accordance with IEC 60900:2004. EN ISO 6789, BS EN 26789, ASME B107.14M.  Precision: ±6%, traceable back to national standards.  Holder: slimTorque VDE bit holder (included in the delivery) for 6mm slimBits.

## Illumination cable and sockets



### Accessories

<b>Thermoplastic,illumination cable, black</b>		<b>Technical data</b>	
No. <b>9068</b>	Eldas-No. 113 347 700	Dimensions mm Weight g/m	58x11.2 110
 <p>2x2.5 mm<sup>2</sup></p>			
<b>Illumination socket with hook, black</b>		<b>Technical data</b>	
No. <b>9064HE</b>	Eldas-No. 930 391 117	Weight g	66
 <p>for hanging, with thread basket</p>		Polyamide 6.6, fibreglass reinforced, black For cable 2 x 1.5 or 2 x 2.5 mm <sup>2</sup>  With contact points, all metal parts stainless steel  Protection class 2, rainproof in vertically hanging position.	
<b>Illuminations socket, black</b>		<b>Technical data</b>	
No. <b>9064ZAE</b>	Eldas-No. 930 391 217	Weight g Ø of mounting holes mm Distance of mounting holes mm	59 5 50
 <p>for screw mounting, with thread basket</p>		Polyamide 6.6, fibreglass reinforced, black For cable 2 x 1.5 or 2 x 2.5 mm <sup>2</sup>  With contact points, all metal parts stainless steel  Protection class 2, rainproof in vertically hanging position.	
<b>Seal</b>		<b>Technical data</b>	
No. <b>9063N</b>	Eldas-No.	O-Ring Dimensions Ø	40 / 30x5
 <p>Ø 30x5</p>		Avoids the penetration of water into the thread basket, when not hung perpendicular.	
<b>Cable end piece made from Polycarbonate</b>		<b>Technical data</b>	
No. <b>9065</b>	Eldas-No. 120 900 997	Cable end for increased safety when using outdoors: equipped with rubber seal. Does not serve as a mechanical load of the cable harnesses.  <b>Do not use for rigging!</b>	
			
<b>Illumination socket without hook, black</b>		<b>Technical data</b>	
No. <b>9064E</b>	Eldas-No. 930 391 017	Weight g	60
 <p>with thread basket</p>		Polyamide 6.6, fibreglass reinforced, black For cable 2 x 1.5 or 2 x 2.5 mm <sup>2</sup>  With contact points, all metal parts stainless steel  Protection class 2, rainproof in vertically hanging position.	




## Illumination cable and sockets

### Accessories

<b>Illuminations socket, black</b>		<b>Technical data</b>	
<b>No.</b> <b>9064FE</b>		<b>Eldas-No.</b> 930 391 317	<b>Weight g</b> 64
for mounting on flat iron bars, with thread basket		Polyamide 6.6, fibreglass reinforced, black For cable 2 x 1.5 or 2 x 2.5 mm <sup>2</sup>  With contact points, all metal parts stainless steel  Protection class 2, rainproof in vertically hanging position.	
<b>Branching box 10 A, 250 V, black</b>		<b>Technical data</b>	
<b>No.</b> <b>9098</b>		<b>Eldas-No.</b> 930 399 017	<b>Weight g</b> 55
		For cable 2 x 1.5 or 2 x 2.5 mm <sup>2</sup>  Junction box made of fibreglass reinforced thermoplastic, black and is rainproof . No stripping of wires necessary, by screwing on the cover an electrical connection is produced by the silver plated brass spikes.  With strain relief clamp  With clamps to screw on suspension cable Ø 3-9 mm	

### General information

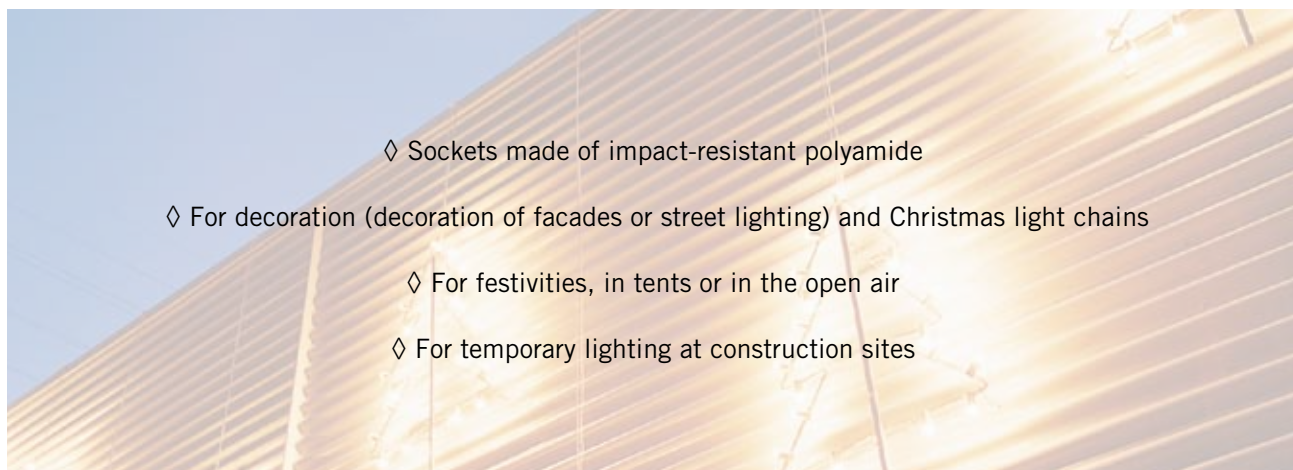

Installation help on request



LED bulbs on request





Quick connection system IP68

**IP68 Quick connection system**

# Woertz IP 3G2.5 mm<sup>2</sup> and Woertz IP 3G4 mm<sup>2</sup>

A high protection degree, short installation procedures, easy handling and expansion possibilities are the main features of the system: anytime, anywhere, IP68 protected.



- Cable end piece IP68  
No. 48510/03

- Quick junction box No. 48243/L/68

## Where are these flat cables used?

- In installations related to stringent requirements. Its high protection degree allows this system to be used in tunnels, where many connections have to be made. Thanks to the rapid installation substantial time savings will be performed.
- Flexibility and robustness make the system ideal for building constructions, public works and open cast works in both construction and excavation phases.
- In industrial washing plants, car wash sites or cleaning installations for tunnels or underground parking where powerful jets of water are used.
- The reliable components also suit outdoor applications such as market places, trade fairs and openair events.
- IP66/68 allows not only the use in wet but also in dusty environment. The system therefore suits workshops, joineries or industrial plants.
- No need to seal the connecting boxes or to sever the cable, new potential sources of errors are thus avoided.

Flat cable enables installations to be completed easily with further connections anywhere, anytime.

## Woertz 3G2.5 mm<sup>2</sup>

### Flat cable 3G2.5 mm<sup>2</sup>

PVC		halogen-free
No.	Eldas-No.	No. Eldas-No.
 <b>49685</b> <b>49685/SM*</b>	113 297 807	<b>49686</b> <b>49686RT</b> <b>SC49686RT</b> <b>49686/SM*</b>
L+N+PE	* on request	more colours on request

#### Technical data

Dimensionen	mm	16.5x6	16.5x6
Weight	g/m	185	185
Fire load	kWh/m	0.583	1.02
No. of leads x cross-section	mm <sup>2</sup>	3x2.5	3x2.5

#### High current part

Copper conductors	tinned, finely stranded	tinned, finely stranded
Insulation of the leads	PVC	flame retardant polyethylene
Colour of the leads	brown, green/yellow, blue	brown, green/yellow, blue
Cross-section	mm <sup>2</sup> 2.5	2.5
Coat insulation	PVC oil resistant	flame retardant polyethylene
Test voltage	kV / Hz 4 / 50	4 / 50
Rated voltage	kV 0.6/1	0.6/1
DC-resistance	Ω/km 8.21	8.21
Max. operating temperature	°C -15 to +90	-15 to +90
Min. installation temperature	°C +5	+5
Cu weight	kg/km 72	72

## Woertz 3G4 mm<sup>2</sup>

### Flat cable 3G4 mm<sup>2</sup>

PVC		halogen-free
No.	Eldas-No.	No. Eldas-No.
		<b>49646</b>
L+N+PE		more colours on request

#### Technical data

Dimensionen	mm	16.5x6
Weight	g/m	224
Fire load	kWh/m	0.95
No. of leads x cross-section	mm <sup>2</sup>	3x4

#### High current part

Copper conductors	tinned, highly flexible
Insulation of the leads	flame retardant polyethylene
Colour of the leads	brown, green/yellow, blue
Cross-section	mm <sup>2</sup> 3x4
Coat insulation	flame retardant polyethylene
Test voltage	kV / Hz 4 / 50
Rated voltage	kV 0.6/1
DC-resistance	Ω/km 5.09
Max. operating temperature	°C -15 to +90
Min. installation temperature	°C +5
Cu weight	kg/km 72

## Woertz IP 3G2.5 mm<sup>2</sup> and Woertz IP 3G4 mm<sup>2</sup>






Woertz Quick connection technique to flat cable No. 49685, 49686 and 49646

IP68 box to flat cable		Technical data		
<div>No.</div> <div>48243/L/68</div> <div></div>	<div>Eldas-No.</div> <div>150 701 467</div>	L×W×H mm	120×30.5×42.5	Woertz patented piercing technique, without any tool
		Fire load kWh	0.29	
		Fire behaviour	UL 94-V0	Protection IP68 (single contacting) / Protection IP40 (multiple contacting)
		Rated voltage V/Hz	250/50	
		Test current A	24	Tightening torque Nm 0.7
		Cable gland thread	M16×1.5	
		Installation temperature min.	+5 °C	
		Packing unit pce.	5	screwdriver No.
Degree of protection	IP66/IP68 (2 m, 30 min)			
IP68 LED box to flat cable		Technical data		
<div>No.</div> <div>48243/LED/230V</div> <div></div>		L×W×H mm	17.5×30.5×54.5	Light source (Light emitting diode), LED Colour of light white
		Power consumption W	7	
		Luminous flux lm	380	Degree of protection IP65/IP68 (2 m, 30 min)
		Colour temperature K	5000	
		max. ambient temperature °C	80	
		Angle of radiation °	120	
		Supply voltage VAC	230	
		Current consumption mA	30	
		Packing unit pce.	5	
Cable glands		Technical data		
<div>No.</div> <div>48560/01/M16</div> <div>48560/03/M16</div> <div>48560/05/M16</div> <div></div>	<div>Eldas-No.</div> <div>121 682 507</div> <div>121 682 517</div> <div>121 682 527</div>	Diameter of cables M16×1.5 mm	4.5-6.0	of polyamide, grey
			6.0-8.0	delivered with O-ring seal of NBR
			8.0-10.5	halogen-free
		Packing unit pce.	5	



# Woertz IP 3G2.5 mm<sup>2</sup> and Woertz IP 3G4 mm<sup>2</sup>

## Accessories

End piece without stripping		Technical data	
<b>No.</b> <b>48510/03</b>	Eldas-No. 120 900 307	LxWxH mm 40x25x15 Weight g Fire load kWh na Packing unit pce. 8  Degree of protection IP66/IP68 (2 m, 30 min)	of polycarbonate, halogen-free; silicone gel  Note: Cut neatly both ends of the cable before mounting the end pieces. No need to strip the cable. Cable end piece may only be mounted once.
			
Clamp		Technical data	
<b>No.</b> <b>49693</b>	Eldas-No. 120 008 607	LxWxH mm 31x10x8.5 Fire load kWh 0.01 Packing unit pce. 100	of polyamide 6.6, halogen-free, grey
			
<b>No.</b> <b>49462</b>	Eldas-No.	LxBxH mm 10x45x1 Weight g 3.8 Packing unit pce. 100	Stainless steel V4A
			
Shears		Technical data	
<b>No.</b> <b>49930</b>	Eldas-No. 983 045 007	Packing unit pce. 1	For cutting neatly and easily every type of flat cables (max. width 32mm).  With sliding anvil. Teflon coated blades.
			
Insulating tape		Technical data	
<b>No.</b> <b>49960</b>	Eldas-No. 171 013 004	Dimension mm 102x100x2.3 Durchschlagsfestigkeit max. kV/mm 23 Temperatur max. °C +70 Verpackungseinheit m 10	To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.  Weatherproof, self-fusing.
			

# Woertz power IP 5G2.5 mm<sup>2</sup>

Every connection you need where you need it...

Hard conditions don't affect products with a high IP protection degree...

- Cable end piece IP68  
No. 48510/08

- Quick junction box IP68  
No. /L/68

- Quick junction box IP68 with fastening  
possibility for secure mounting  
No. /L/68/S

## Where are these flat cables used?

- In installations related to stringent requirements. Its high protection degree allows this system to be used in tunnels, where many connections have to be made. Thanks to the rapid installation substantial time savings will be performed.
- Flexibility and robustness make the system ideal for building constructions, public works and open cast works in both construction and exploitation phases.
- Three-phase loads may be supplied through this system. The lamps are distributed over the different pole conductors and individually switched.
- In industrial washing plants, car wash sites or cleaning installations for tunnels or underground parking where powerful jets of water are used.
- IP66/68 allows not only the use in wet but also in dusty environment. The system therefore suits workshops, joineries or industrial plants.
- No need to seal the connecting boxes or to sever the cable, new potential sources of errors are thus avoided.

Flat cable enables installations to be completed easily with further connections anywhere, anytime.

## Woertz power IP 5G2.5 mm<sup>2</sup>

Flat cable IP 5G2.5 mm<sup>2</sup>



### halogen-free

No.	Eldas-No.
■ 49863/FRNC	113 398 024

3 L+N+PE

more colours on request

### Technical data

Dimension	mm	25×6
Weight	g/m	247
Fire load	kWh/m	0.671
No. of leads x cross-section	mm <sup>2</sup>	5×2.5

### High current part

Copper conductors		tinned, highly flexible
Insulation of the leads		flame retardant polyethylene
Colour of the leads		grey, black, brown, blue, green/yellow
Cross-section	mm <sup>2</sup>	2.5
Coat insulation		flame retardant polyethylene
Test voltage	kV / Hz	4 / 50
Rated voltage	kV	0.6/1
DC-resistance	Ω/km	8.21
Max. operating temperature	°C	-15 to +90
Min. installation temperature	°C	+5
Bending radius		min. 6× cable thickness
Cu weight	kg/km	120

## Flat cable connectors for IP68 applications








Feeding and branching devices

Box	Technical data	
<b>No.</b> Eldas-No.	L×W×H mm, without cable gland	155×50×55
<b>/L/68</b> 150 710 407	L×W×H mm, with fastening facility	155×75×55
	Fire load kWh	0.74
	Fire behaviour	UL 94-V0
<b>with fastening facility:</b>	Connecting capacity mm	3.0×3.5
<b>/L/68/S</b> 150 710 417	Cross-section mm <sup>2</sup>	2.5 (4)
	Rated voltage V/Hz	400/50
	Nominal current A	16
	Packing unit pce.	1
	Degree of protection	IP66/IP68 (2 m, 30 min)
		may be mounted without any tool
		Thread of cable glands: M20×1.5
		Fastening facility by means of screws and cable ties




# Woertz power IP 5G2.5 mm<sup>2</sup>

## Accessories

End piece without stripping		Technical data		
<b>No.</b> <b>48510/08</b>	Eldas-No. 120 900 617	LxWxH mm Weight g Fire load kWh Packing unit pce. Degree of protection	40x36x16 14.3 n.a. 5 IP66/IP68 (2 m, 30 min)	of polycarbonate, halogen-free; silicone gel  Note: Cut neatly both ends of the cable before mounting the end pieces. No need to strip the cable. Cable end piece may only be mounted once.
				
Cable fastening clamp		Technical data		
<b>No.</b> <b>49731</b>	Eldas-No. 120 008 107	LxWxH mm Weight g Fire load kWh Packing unit pce.	52x10x10 2 0.02 100	of polyamide 6.6, halogen-free
				
<b>No.</b> <b>49733</b> <b>49733A</b>	Eldas-No. 150 900 117 150 900 107	LxWxH mm Weight g Fire load kWh Packing unit pce.	40x15x15 3.7 0.03 100	<b>49733</b> for screwing on <b>49733A</b> for sticking on  of polyamide 6.6, halogen-free
				
<b>No.</b> <b>49735</b>	Eldas-No.	LxBxH mm Packing unit pce.	10x51x1 10	Stainless steel V4A
				
Shears		Technical data		
<b>No.</b> <b>49930</b>	Eldas-No. 983 045 007	Weight g Packing unit pce.	223 1	For cutting neatly and easily every type of flat cables (max. width 32mm).  With sliding anvil. Teflon coated blades.
				
Insulating tape		Technical data		
<b>No.</b> <b>49960</b>	Eldas-No. 171 013 004	LxWxH mm Weight g Dielectric strength max. kV/mm Temperature max. °C Packing unit pce.	102x100x2.3 33 23 70 10	To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.  Weatherproof, self-fusing.
				
Cable glands		Technical data		
<b>No.</b> <b>48560/03/M20</b> <b>48560/05/M20</b>	Eldas-No. 121 682 607 121 682 617	Diameter of cables mm  Packing unit pce.	8.0-11.0 11.0-15.0 5	of polyamide, grey M20x1.5  delivered with O-ring seal of NBR  halogen-free
				

# Mounting procedure of the flat cable box No. /L/68

(can be used for supply and branching!)




Open the cover. Put the cable gland on the round cable. Cut the round cable to the desired length and remove the sheath. Introduce the leads after having stripped off the insulation and tighten the clamping screws. Check if the O-ring seal is at the right position and tighten the cable gland.



Close the cover again.



Position the base of the junction box and screw it on to its support if required.



Position the asymmetric flat cable (right position is shown by the groove in one narrow side of the cable sheath). Is the flat cable not in the right position, it cannot be inserted into the base. The cable has to be clean, undamaged, free from grease and oil residue.



Snap together the upper part and the base.



Fold back the lever. It must audibly click into place. The box is thus connected and locked. It is also possible to secure the lever by using the supplied screw. The cover may be marked if necessary.

## Possibility of pre-wiring:

### Service to our customers.

On request the connecting boxes may be provided in advance with round outgoing cables.



The overcurrent protection devices will be chosen in relation to the length of installed cables so that their response time conform to specifications in case of malfunction.



The box has only to be connected to the cable once. If the box has to be displaced, the protection degree of the system will no more be fulfilled. However the box may be used as IP40 box. It is absolutely necessary to reinsulate correctly the holes due to the cutting teeth by means of the insulating tape, in order to ensure the IP protection degree. We do not assume liability for defects occurring through improper operation!




A high IP protection degree requires the highest demands on the installation material. The Woertz System guarantee only applies to original products finished in our workshops (such as flat cables, boxes and accessories) or provided by appropriate, controlled suppliers.

# Woertz combi IP

## 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup>

For the first time bus technology finds application under more stringent requirements. Power current conductors and bus conductors are moulded here in a single cable sheath.

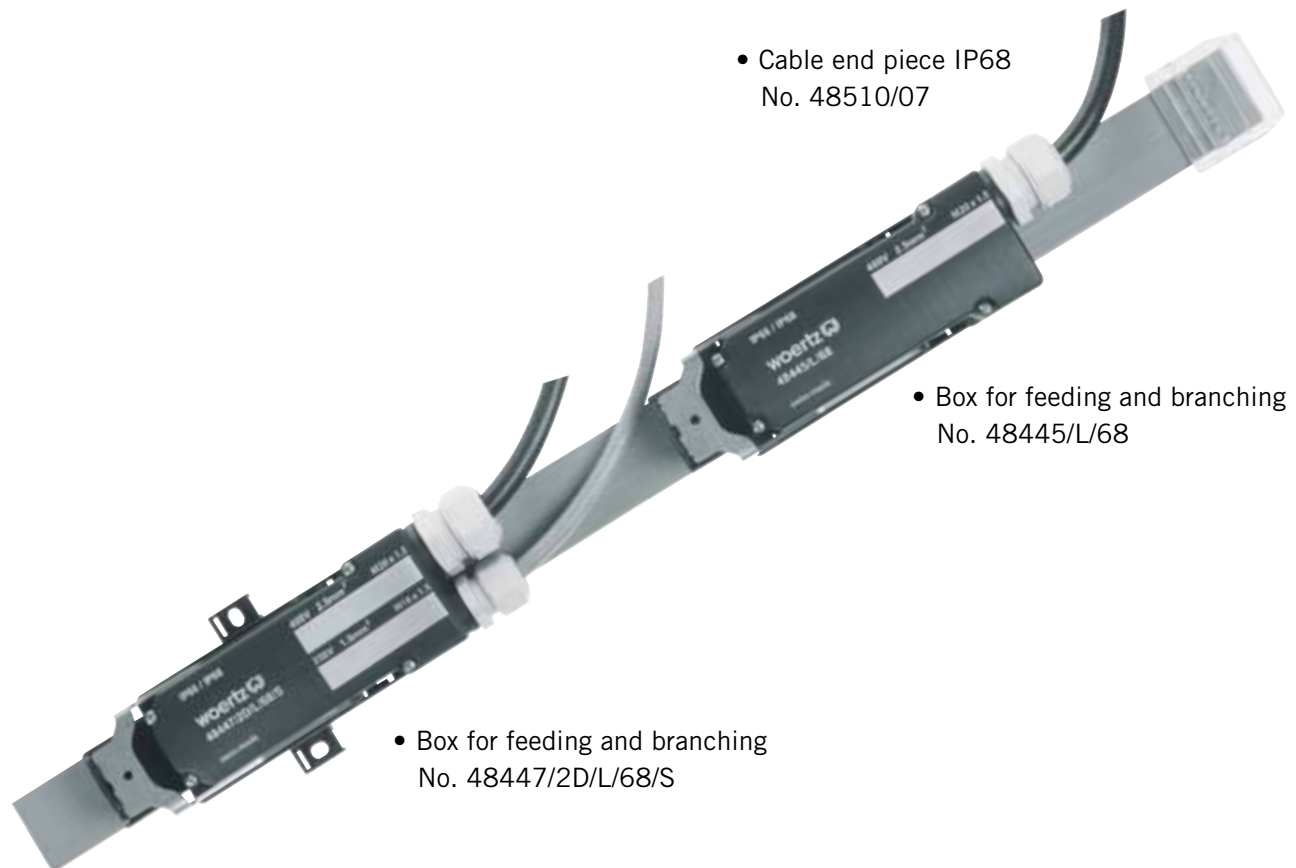

### Where is this flat cable system used?



- Three-phase loads may be supplied through this system. The same cable may also carry bus data.
- The flat cable ecobus combi with shielded bus cable finds broad application in the KNX technology for instance; power bus systems like DALI may be fed through the ecobus combi flat cable with unshielded bus cable.
- Flexibility and robustness make the system ideal for building constructions, public works and open cast works in both construction and excavation phases.
- For the first time bus technology finds application under more stringent requirements. The high protection degree enables for instance DALI light control to be used in street tunnels.
- In industrial washing plants, car wash sites or cleaning installations for tunnels or underground parking where powerful jets of water are used.
- IP66/68 allows not only the use in wet but also in dusty environment. The system therefore suits workshops, joineries or industrial plants.
- No need to seal the connecting boxes or to sever the cable, new potential sources of errors are thus avoided.

Flat cable enables installations to be completed easily with further connections anywhere, anytime.



# Woertz combi IP 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup> - without shield



Flat cable combi IP 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup>

PVC		halogen-free	
No.	Eldas-No.	No.	Eldas-No.
		 49864/FRNC	113 398 009
3L+N+PE+2 bus without shield		more colours on request	

Technical data			
Dimension	mm		33×6
Weight	g/m		340
Fire load	kWh/m		1.9
No. of leads x cross-section	mm <sup>2</sup>		5×2.5 + 2×1.5
High current part			
Copper conductors			CU tinned, class 5
Insulation of the leads			flame retardant polyethylene
Colour of the leads			grey, black, brown, blue, yellow/green
Cross-section	mm <sup>2</sup>		2.5
Coat insulation			flame retardant polyethylene
Test voltage	kV / Hz		4 / 50
Rated voltage	kV		0.6/1
DC-resistance	Ω/km		8.21
Max. operating temperature	°C		-15 to +90
Min. installation temperature	°C		+5
Cu weight	kg/km		120
Bus part			
Copper conductors			CU tinned, class 5
Insulation of the leads			Polyethylene
Colour of the leads			neutral
Cross-section	mm <sup>2</sup>		1.5
Test voltage	kV / Hz		4 / 50
Rated voltage	V		230
Max. rated current	A		3
DC-resistance	Ω/km		13.3
Coat insulation			flame retardant polyethylene
Capacitance	pF/m		70
Attenuation at 1Hz	dB/100m		1.2/100
Charact. impedance at 1 MHz	nom Ω		nom. 75
Max. operating temperature	°C		-15 to +90
Min. installation temperature	°C		+5
Cu weight	kg/km		29

## Woertz combi IP 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup> - **without shield**

Boxes for feeding and branching, for IP68 applications

Feeding and branching box		Technical data	
<b>No.</b> <b>48445/L/68</b>	Eldas-No. 150 703 707	Weight g 210	No. of leads x cross-section mm <sup>2</sup> 5×2.5
		L×W×H mm, without cable gland 155×50×55	Cross-section of wires with end sleeves mm <sup>2</sup> 4
		L×W×H mm, with fastening facility 155×75×55	Test current power power current part A 24
		Fire load kWh 0.74	Test voltage kV/Hz 4 / 50
<b>with fastening facility:</b>		Fire behaviour UL 94-V0	Rated voltage Power current V/Hz 400/50
<b>No.</b> <b>48445/L/68/S</b>	Eldas-No. 150 703 717	Connecting capacity mm 3.0×3.5	Thread of cable gland M20×1.5
		Plastic parts halogen-free	Tightening torque Nm 0.7
		Metal parts corrosion-resistant	Screwdriver No. 1
		Degree of protection IP65/IP68 (2 m, 30 min)	
Feeding and branching box		Technical data	
<b>No.</b> <b>48447/2D/L/68</b>	Eldas-No. 150 703 607	Weight g 210	No. of leads x cross-section mm <sup>2</sup> 5×2.5+2×1.5
		L×W×H mm, without cable gland 155×50×55	Cross-section of wires with end sleeves mm <sup>2</sup> 4 + 1.5
		L×W×H mm, with fastening facility 155×75×55	Test current power power current part A 24
		Fire load kWh 0.74	Test voltage kV/Hz 4 / 50
<b>with fastening facility:</b>		Fire behaviour UL 94-V0	Rated voltage Power current V/Hz 400/50
<b>No.</b> <b>48447/2D/L/68/S</b>	Eldas-No. 150 703 617	Connecting capacity mm 3.0×3.5	Rated voltage bus V/Hz 230/50
		Plastic parts halogen-free	Max. rated current bus part A 3
		Metal parts corrosion-resistant	Thread of cable gland M20×1.5 & M16×1.5
		Degree of protection IP65/IP68 (2 m, 30 min)	Tightening torque Nm 0.7
			Screwdriver No. 1

# Woertz combi IP 5G2.5 mm<sup>2</sup> + 2×1.5 mm<sup>2</sup>

## Accessories

Cable end piece		Technical data		
No.	Eldas-No.	LxWxH mm	40x44x16	of polycarbonate, halogen-free; silicone gel
48510/07	120 900 607	Weight g	16.8	
		Fire load kWh	n.a.	
		Packing unit pce.	4	
		Degree of protection	IP66/IP68 (2 m, 30 min)	
Note: Cut neatly both ends of the cable before mounting the end pieces. No need to strip the cable. Cable end piece may only be mounted once.				
Cable fastening clamp		Technical data		
No.	Eldas-No.	LxWxH mm	52x10x10	of polyamide 6.6, halogen-free
49731	120 008 107	Weight g	2	
		Fire load kWh	0.02	
		Packing unit pce.	100	
Shears		Technical data		
No.	Eldas-No.	Weight g	223	for cutting neatly and easily every type of flat cables (max. width 32mm).  With sliding anvil. Teflon coated blades
49930	983 045 007	Packing unit pce.	1	
				
Insulating tape		Technical data		
No.	Eldas-No.	LxWxH mm	102x100x2.3	to reinsulate correctly the holes due to cutting teeth when removing or displacing connections.  Weatherproof, self-fusing.
49960	171 013 004	Weight g	33	
		Dielectric strength max. kV/mm	23	
		Temperature max. °C	+70	
		Packing unit pce.	10	
Cable glands		Technical data		
No.	Eldas-No.	Diameter of cables M16x1.5 mm	4.5-6.0	of polyamide, grey  delivered with O-Ring seal of NBR  halogen-free
48560/01/M16	121 682 507		6.0-8.0	
48560/03/M16	121 682 517		8.0-10.5	
48560/05/M16	121 682 527	Diameter of cables M20x1.5 mm	8.0-11.0	
48560/03/M20	121 682 607		11.0-15.0	
48560/05/M20	121 682 617	Packing unit pce.	5	
				

# Woertz power IP 5G6 mm<sup>2</sup>

Every connection you need where you need it...

Hard conditions don't affect products with a high IP protection degree...



- Quick junction box IP68  
No. 48785/L/68

- Quick junction box IP68 with fastening  
possibility for secure mounting  
No. 48785/L/68/S

## Where are these flat cables used?

- In installations related to stringent requirements. Its high protection degree allows this system to be used in tunnels, where many connections have to be made. Thanks to the rapid installation substantial time savings will be performed.
- Flexibility and robustness make the system ideal for building constructions, public works and open cast works in both construction and excavation phases.
- In industrial washing plants, car wash sites or cleaning installations for tunnels or underground parking where powerful jets of water are used.
- The reliable components also suit outdoor applications such as market places, trade fairs and openair events.
- IP66/68 allows not only the use in wet but also in dusty environment. The system therefore suits workshops, joineries or industrial plants.
- No need to seal the connecting boxes or to sever the cable, new potential sources of errors are thus avoided.

Flat cable enables installations to be completed easily with further connections anywhere, anytime.

## Woertz power IP 5G6 mm<sup>2</sup>

### Flat cable IP 5G6 mm<sup>2</sup>

PVC		halogen-free
No.	Eldas-No.	No. Eldas-No.
 <p>3L+N+PE</p>		<p>■ 48780/FRNC</p> <p>more colours on request</p>

#### Technical data


Dimensionen	mm	32x7.5
Weight	g/m	510
Fire load	kWh	1.8
No. of leads x cross-section	mm <sup>2</sup>	5x6

#### High current part

Copper conductors		tinned, class 5
Insulation of the leads		flame retardant polyethylene
Colour of the leads		grey, black, green/yellow, blue, brown
Cross-section	mm <sup>2</sup>	6
Coat insulation		flame retardant polyethylene
Test voltage	kV / Hz	4 / 50
Rated voltage	kV	0.6/1
DC-resistance	Ω/km	3.39
Max. operating temperature	°C	-15 to +90
Min. installation temperature	°C	+5
Cu weight	kg/km	288


#### Junction box

#### Technical data

<b>No.</b> <b>48781 / 65</b> 	LxWxH mm	122x120x90 (without cable gland)	Plastic parts: halogen-free Metal parts: corrosion-resistant
	Max. rated current	32	
	Test voltage kV/Hz	4/50	
	Rated voltage V/Hz	690/50	
	Degree of protection	IP65	
	Fire load kWh	4.08	
	Packing unit pce.	1	
	<b>IP68 on request</b>		

## Flat cable boxes for IP68 application

### Feeding and branching box

Box	Technical data	
<b>No.</b> <b>48785/L/68</b>  <p>fastening facility: 48785/L/68/S</p>	Eldas-No.	LxWxH without cable gland mm 155x50x55 LxWxH with fastening facility mm 155x75x55 Fire load kWh 0.74 Fire behaviour UL 94-V0 Connecting capacity mm 3.0x3.5 Cross-section mm 2.5 Cross-section with Litzenhülse mm 4 Rated voltage V/Hz 400/50 Test voltage V/Hz 4 / 50 Test current power max. A 24 Weight g 210 Packing unit pce. 1  Degree of protection IP65/IP68 (2 m, 30 min)

may be mounted without any tool  
Thread of cable glands: M20x1.5  
Fastening facility by means of screws and cable ties

# Woertz power IP 5G6 mm<sup>2</sup>

## Accessories

<b>Heat-shrinkable end cap</b>		<b>Technical data</b>	
<b>No.</b> <b>48511/24</b>		LxØ mm Weight g Packing unit pce. Degree of protection	77x26 10.6 5 IP68
		Provided with adhesive and sealing compound inside <b>Note:</b> Cut neatly both ends of the cable before mounting the end pieces. No need to strip the cable may only be mounted once.	
<b>Set of two clamps</b>		<b>Technical data</b>	
<b>No.</b> <b>49977</b>	Eldas-No. 120 000 007	LxWxH mm (one half) Weight g Fire load kWh Ø fixing holes mm Distance between fixing holes mm Packing unit pce.	56x15x12 6.5 0.04 4.5 47 100
		for screwing on - To fix the cable of polyamide 6.6, halogen-free  2 clamps per fixing point	
<b>Cutting shears</b>		<b>Technical data</b>	
<b>No.</b> <b>49930</b>	Eldas-No. 983 045 037	Weight g Packing unit pce.	223 1
		For cutting neatly and easily every type of flat cables (max. width 32mm).	
<b>Insulating tape</b>		<b>Technical data</b>	
<b>No.</b> <b>49960</b>	Eldas-No. 171 013 004	LxWxH mmxm Weight g Dielectric strength max. kV/mm Temperature max. Packing unit m	50x1 50.1 18 +70 °C 1
		To reinsulate correctly the holes due to pointed screws or cutting teeth when removing or displacing connections.  Weatherproof, self-fusing.	
<b>Cable glands</b>		<b>Technical data</b>	
<b>No.</b> <b>48560/03/M20</b> <b>48560/05/M20</b>	Eldas-No. 121 682 607 121 682 617	Diameter of cables mm  Packing unit pce.	8.0-11.0 11.0-15.0 5
		of polyamide, grey M20x1.5  delivered with O-ring seal of NBR  halogen-free	



# Basic standards and concepts

**A high protection degree requires the highest demands on the installation material.**









The IP rating is used to specify the environmental protection - electrical enclosure - of electrical equipment (electrical devices, lighting or installations).

The degrees of protection are most commonly expressed as „IP“ followed by two characteristic numerals. The letters IP stands for Ingress Protection.

The first numeral indicates the degree of protection against accidental contacts and penetration of solid foreign bodies.

The second numeral indicates the degree of protection against harmful effects of water.


When the degree of protection corresponding to one of the numerals is not stated (be it unnecessary or unknown) it is, replaced by an X.

First characteristic numeral	Protection degree	Symbols	Second characteristic numeral	Protection degree	Symbols
0	non-protected		0	non-protected	
1	Protection against solid bodies exceeding 50mm dia. No protection against deliberate access.		1	Protection against vertically falling drops	
2	Protection against solid foreign bodies Ø > 12.5mm. Protection against contact of fingers.		2	Protection against dripping water when tilted up to 15° in relation to its normal position	
3	Protection against solid foreign bodies Ø > 12.5mm. Protection against contact of tools.		3	Protection against water falling at an angle up to 60° in relation to the vertical position	
4	Protection against solid foreign bodies Ø > 1mm. Protection against accidental contact with wires.		4	Protection against splashing water	
5	Protection against dust penetration, total protection against any contact		5	Protection against water jets from any direction	
6	Total protection against dust penetration, total protection against any contact		6	Protection against heavy seas or inundations	
			7	Protection against the effects of immersion under defined conditions of pressure and time.	
			8	Protection against prolonged submersion	

« Time saving thanks to  
pre-wiring »



**Refer to our catalogue on Fire  
Protection Systems**



**Safety systems FE180**


# Woertz FE180

## 3G2.5 mm<sup>2</sup> + 3G4 mm<sup>2</sup>

## 5G2.5 mm<sup>2</sup> + 5G4 mm<sup>2</sup>

## 5G16 mm<sup>2</sup>

Thanks to this installation system based upon flat cable, all the components related to safety are continuously supplied, even in case of fire. The high degree of protection enables this system to be used even under stringent conditions.

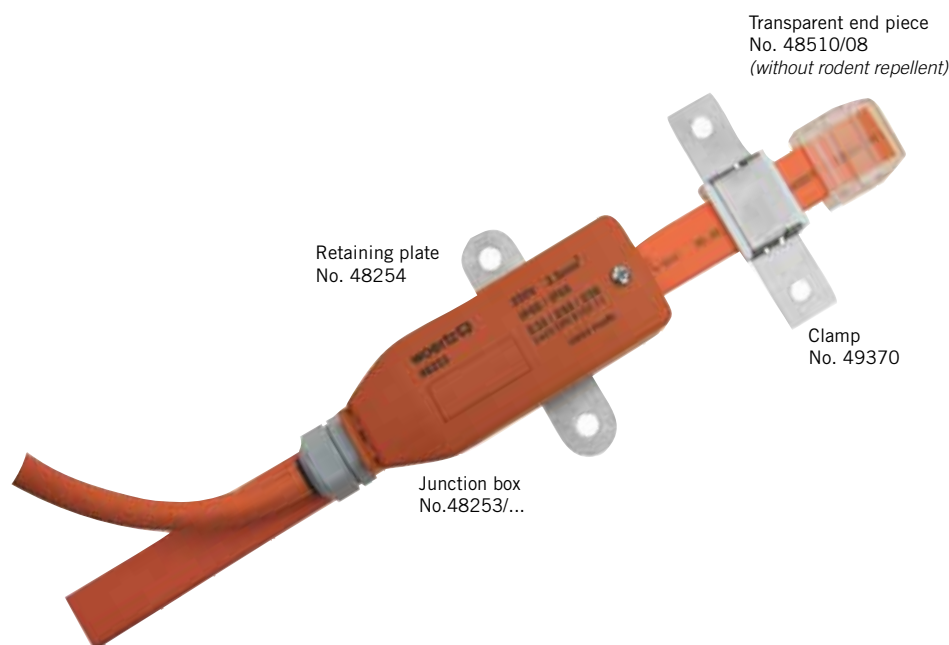

**Our safety cable with the additional markings E30 / E60 / E90 meet the system circuit integrity with the tested components of the Woertz company.**

### Where are these flat cables used?


- In installations running under stringent conditions
- For feeding safety components: emergency lighting and way guidance systems, smoke extraction systems or elevators specially meant for fire and rescue service.
- Quick and safe installation for industrial or functional buildings (offices or shopping centres)
- The high degree of protection enables this system to be used in tunnels or on industrial sites
- The system turns out to be very flexible and robust in building and utilization phases
- IP68 enables the system to be used in damp environment; the boxes are dust proof and may be used thus in workshops (joiner's) or similar industrial rooms.
- Labor intensive sealing of the boxes is not necessary: as the cable never has to be interrupted there is no source of possible error.

Thanks to the flat cable additional loads may be connected anytime at any point.



## Mounting procedure of junction box No. 48253/L/68/E90


(may be used for both feeding and branching)




Remove the cover plate of the box. The cable gland has to be prepared and mounted on the branching cable (round cable). Cut the latter to the desired length and dismantle it. Introduce the stripped leads.




Tighten up the 3 screws. Once the O-ring is positioned correctly in the cable gland, tighten up the latter.



Position the flat cable in the right position. The ridged base acts as a reference point. It has to match the ridging of the flat cable. In case of incorrect mounting the box cannot be fitted with normal force. The cable must be cleaned, gel and oil must be removed.




Snap together the upper part and the base. Tighten up the 3 fastening screws of the base.



Tighten up the 6 piercing screws (Twin-Piercing) in order to establish contact with the flat cable wires.

Philips No.1  
0.7Nm  
6.2lb-in



Replace the cover plate carefully and tighten up the screws. The box may be marked if necessary.

### Pre-wiring means cost-saving

#### Service to our customers.

On request the boxes may be provided in advance with round outgoing cables.



The overcurrent protection devices will be chosen in relation to the length of installed cables so that their response time conforms to specifications in case of malfunction. The circuit integrity E90 will only be maintained if the Woertz components are correctly used and fastened with the prescribed material.



The box will be connected to the cable only once. If it has to be displaced, the degree of protection of the box and of the whole system will not be guaranteed anymore. The box may only be used later as a box with protection degree IP40. The holes in the sheath have to be reinsulated to maintain the protection degree. We cannot accept any liability for damage caused by incorrect use.




A high IP degree of protection imposes particularly high requirements in terms of installation material. The Woertz guarantee only applies to original products finished in our workshops such as flat cables, boxes and round cables with connectors.





# Cable duct system Woertz E90

Duct system 80x80 for E90 applications

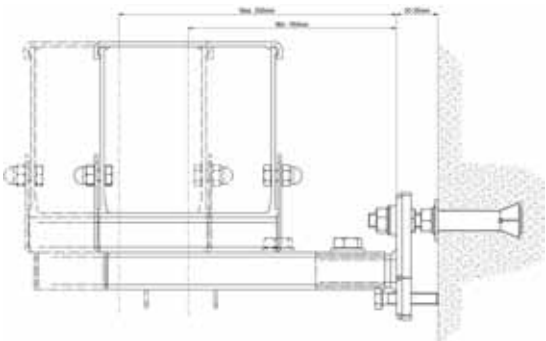

Technical data		
Dimensions	mm	80x80
Weight	g/m	not indicated
Colour		yellow
Material of duct sheath		glass fibre-reinforced polyester resin with fire-proof fabric tape
Material metal components		V4A - 1.4571
Material screws, washers, nuts		V4A
Marking		Woertz duct E30 - E90, date of manufacture, series number, meter marks
Function integrity (system)		E90 according to DIN 4102 part 12
NC = no corrosive fire effluent		similar to IEC 60754-2
LS = low smoke generation		similar to IEC 61034-2
OH = halogen-free		similar to IEC 60754-1
Low fire propagation		similar to IEC 60332-3-24
Function integrity		according to DIN 4102 part 12
Laying of cables		cable trays (mounted on brackets V4A) of glass fibre-reinforced plastics
Distance between brackets	mm	1500
Sales unit		running meter
Delivery unit		L=3000 mm
<p><i>*Refer to our catalogue on Fire Systems</i></p>		

# Basic standards and concepts

The requirements in terms of function integrity are very high. And standards and system concepts are extensive.

All Woertz halogen-free cables (FRLS/OH) are conforming to following standards:

Features of flat cable system	Standards
Halogen-free (OH), non-corrosive gas	IEC 60754-2 EN 50267
Self-extinguishing (FR)	IEC 60332-1 EN 60332-1
Low heat conductivity	IEC 60332-3 CAT.C EN 50266-2-4
Low smoke (LS)	IEC 61034 EN 50268
Structure of the cable, on basis of	DIN VDE 250-214 and DIN VDE 0281

The Woertz system is also conforming to following standards:

Features of flat cable system	Standards
Insulation integrity FE180	IEC 60331-11/-21 (180 minutes) EN 50266-2-4
Function integrity E90	DIN 4102 part 12

**Fire and its effects are not modellable. 100% safety cannot be guaranteed - today no known material can withstand temperatures over 1000°C.**

**Normed tests only cover 95% of the cases which may occur and enable comparative values to be obtained in order to determine different levels of safety.**

## Insulation integrity FE

The basic test (according to IEC 60331) is designed to stress the insulation of a cable by submitting it to a flame temperature of at least 750°C (test length 50cm).

If the electrical current flows for the 180 experimental minutes, if no short-circuit occurs, the test turns out positive and the circuit integrity of the cable is classified as FE 180 (FE = effect of fire or flame).

## Function integrity E

Testing the function integrity requires measuring the duration for which electrical current goes on feeding safety components such as emergency lighting and way guidance systems, smoke extraction systems or elevators specially meant for fire and rescue service.

The function integrity indicates the duration for which an installation should continue to function in case of fire. This applies to the whole installation, cables, boxes, cable ducts and fastening accessories.

Function integrity is designated by the letter E together with a figure. E 90 means that the installation should continue to function for 90 minutes. Further usual standards are E60 and E30. No short-circuit and no voltage failure should occur for the given durations.

# General terms and conditions

## 1. Prices for Swiss market

Prices are understood as EXW in CHF excluding VAT (sales tax). The prices in effect at the date of receipt of order apply; surcharges taking account increases of costs of metals are reserved.

## 2. Packaging and delivery costs

All articles – depending on their weight and bulk – will be shipped by mail, parcel post, truck, airmail or ship, in each case under the liability of the recipient. Additional costs for express deliveries or unusual packaging are at the expense of the recipient. Pallets, boxes, containers, cable drums shall be invoiced at cost price. We will not take back special crates, disposable pallets and boxes. We will not replace breakages, damage and losses during transport free of charge. The transport company should be immediately notified of any damage.

## 3. Performance

Productions of special drawings, as well as changes to drawings that depart from the performance offered shall be invoiced according to time outlay incurred. This likewise applies for additional project planning effort. Additional work (such as adaptations, special parts, sections, cutouts, notches etc.) that is not detailed in the tender shall be invoiced separately, according to time outlay. The additional work incurred for retrospective individual orders or special versions or reworking shall be invoiced. The tools required for customized orders shall be invoiced according to previously stated prices. Such tools shall remain our property. If we are not awarded the order, we reserve the right to submit invoices for specially-manufactured patterns as well as our work in developing the project. We reserve the right to deviations due to raw materials and production within the permitted tolerances, and these do not place us under obligation to accept returned goods.

## 4. Invoicing and payment conditions for Swiss market

Orders with a value under CHF 50.00 shall be invoiced with a minimum charge of CHF 50.00 (excl. surcharges). Orders with a value under CHF 100.00 shall be invoiced net at list price. Invoices are payable within 10 days from the invoice data with 2% discount or within 30 days net. A processing fee will be levied in the event of arrears. Deliveries to recipients who are unknown to us and have previously not fulfilled their payment obligations shall be against cash on delivery or advance payment. We reserve the right to share our payment experiences with an information pool.

## 5. Execution of orders

The cancellation or suspension of orders by the ordering party requires our express agreement, and must occur within 7 days of notification. In particular with the delivery of custom-made articles we reserve an under- or over-delivery of up to 10%. If orders are cancelled any additional costs thereby incurred will be invoiced. Goods ordered on a standby basis must be accepted within the defined period.

## 6. Delivery date

The specified delivery dates shall be observed wherever possible. We are released from the obligation to respect the delivery date by: Operational disruptions, material deficiencies, official regulations, labour disputes, call up of reservists and other cases of force majeure. Claims due to late delivery will be rejected. The delivery period starts on the date on which we are in possession of all required technical, design and commercial specifications from the ordering party relating to design modifications etc.

## 7. Warranty

For material or design faults on the articles delivered, we extend a warranty such that we will replace products that we recognize as being faulty at no extra charge in the 12 months after the installation of the respective products, however no later than 18 months thereafter. These must be forwarded to us with an enclosed delivery note. This warranty shall lapse if improper work is carried out on the product. If circumstances do not allow the corrective work to be carried out at our workshops, the warranty is limited to the free of charge replacement of the device. We do not accept expenditure or time outlays that have been caused outside our company.

## 8. System guarantee

The Woertz guarantee only applies to original products finished in our workshops such as flat cables, boxes and round cables with connectors.

## 9. Liability

Any claims by the ordering party other than those expressly named in these conditions of delivery, regardless of the legal basis on which they are made, especially all claims for compensation for damages, abatement and cancellation of the contract or withdrawal from the contract, are excluded. We only accept liability in the context of mandatory statutory provisions.

## 10. Reservation of proprietary rights

All delivered goods remain our property until all demands in respect of these goods have been fulfilled. We reserve the right to enter the reservation of ownership in the official registers in accordance with respective national laws. The costs for such entries shall be borne by the purchaser.

## 11. Return deliveries

Each return delivery requires our previous agreement and should occur within 12 months after delivery. A delivery note shall be enclosed with the return delivery. In the case of returns of standard equipment that are not due to incorrect delivery on our part, there will only be a reimbursement if the value of goods exceeds CHF 100.00, and we shall charge at least 25% of the value of goods for our own outlays. Returns can only be accepted in the original packaging and with a delivery note. Return of custom-made products of any kind is excluded.

## 12. Claims

Claims regarding to the number of items, weight, faults, etc. can only be taken into account if they are made within 7 days of receipt of the goods.

## 13. Export

Prices are understood as EXW in CHF or in EUR excl. VAT (sales tax). This will be separately charged in accordance with the respectively applicable statutory rate. For exports, the minimum invoice value is EUR 300.00/CHF 500.- or USD 500.-. Deliveries are against advance payment or by mutual agreement. The export of products and parts thereof may be subject to export licensing requirements due to their neutrale or foreseen use.

## 14. Proprietary rights

Our goods are largely protected by patents in Switzerland and in other countries. Transgressions of these proprietary rights will be prosecuted.

## 15. Place of fulfilment and legal venue

The place of fulfilment is Muttens and the legal venue in all events is Arlesheim, Switzerland.

# General points



## COMPANY

### Head office

Hofackerstrasse 47  
P.O. Box 948  
CH-4132 Muttenz 1  
Tel.: + 41 61 466 33 33  
Fax: + 41 61 461 96 06

### Subsidiary

Bärenmattenstrasse 3  
CH-4434 Hölstein  
Tel.: + 41 61 956 56 56  
Fax: + 41 61 956 56 00

info@woertz.ch  
www.woertz.ch

### Branches

Woertz Deutschland GmbH  
Am Goldberg 2  
D - 99817 Eisenach  
Tel. 49(0)3691/621360  
Fax 49(0)3691/621361  
www.mba-ag.com  
info@woertzonline.de  
www.woertzonline.de



## SALES

### Business hours

**Monday-Friday**  
07:00–12:00  
13:15–17:15  
(except for public holidays)  
Tel.: +41 61 466 33 44  
Fax: +41 61 461 37 53

### Collections:

07:00–16:00  
You can collect any pre-ordered products at the customer counter one hour later.



## OUR STRENGTHS

Technical advice appropriate to the application.

High availability of standard products.

Custom designs for special applications.

Fast, flexible, and professional.

### Woertz:

More than 80 years' experience in the field of electrical installation technology.



## SYSTEM GUARANTEE

The Woertz system guarantee applies exclusively to original Woertz products and Woertz system solutions, that is, Woertz® contact boxes, Woertz® flat cables, or other products that have been checked and approved by Woertz for these contacts.









